

General Description

The MAX14691–MAX14693 adjustable overvoltage, undervoltage, and overcurrent protection devices guard systems against overcurrent faults in addition to positive overvoltage and reverse-voltage faults. When used with an optional external p-channel MOSFET, the devices also protect downstream circuitry from voltage faults up to ±60V. The devices feature a low, 31mΩ, on-resistance integrated FET.

During startup, the devices are designed to charge large capacitances on the output in a continuous mode for applications where large reservoir capacitors are used on the inputs to downstream devices. Additionally, the devices feature a dual-stage, current-limit mode in which the current is continuously limited to 1x, 1.5x, and 2x the programmed limit, respectively, for a short time after startup. This enables faster charging of large loads during startup.

The MAX14691–MAX14693 also feature reverse-current and overtemperature protection. The devices are available in a 20-pin (5mm x 5mm) TQFN package and operate over the -40°C to 125°C temperature range.

Applications


- Industrial Power Systems
- Control and Automation
- Motion System Drives
- Human Machine Interfaces
- High-Power Applications

Features and Benefits

- Robust, High-Power Protection Reduces System Downtime
 - Wide Input Range: +5.5V to +58V
 - Negative Input Tolerance to -60V with External pFET
 - Low 31mΩ (typ) R_{ON}
 - Reverse Current-Blocking Protection with External pFET
- Enables Fast Startup and Brownout Recovery
 - Thermal Foldback Current-Limit Protection
 - Dual-Stage Current Limiting
 - 1.0x Startup Current (MAX14691)
 - 1.5x Startup Current (MAX14692)
 - 2.0x Startup Current (MAX14693)
- Flexible Design Enables Reuse and Less Requalification
 - Adjustable OVLO and UVLO Thresholds
 - Programmable Forward Current Limit From 0.6A to 6A with ±15% Accuracy Over Full Temperature Range
 - Normal and High-Voltage Enable Inputs (EN and HVEN)
 - Protected External pFET Gate Drive
- Saves Board Space and Reduces External BOM Count
 - 20-Pin 5mm x 5mm TQFN Package
 - Integrated nFET

Ordering Information appears at end of data sheet.

Typical Application Circuit

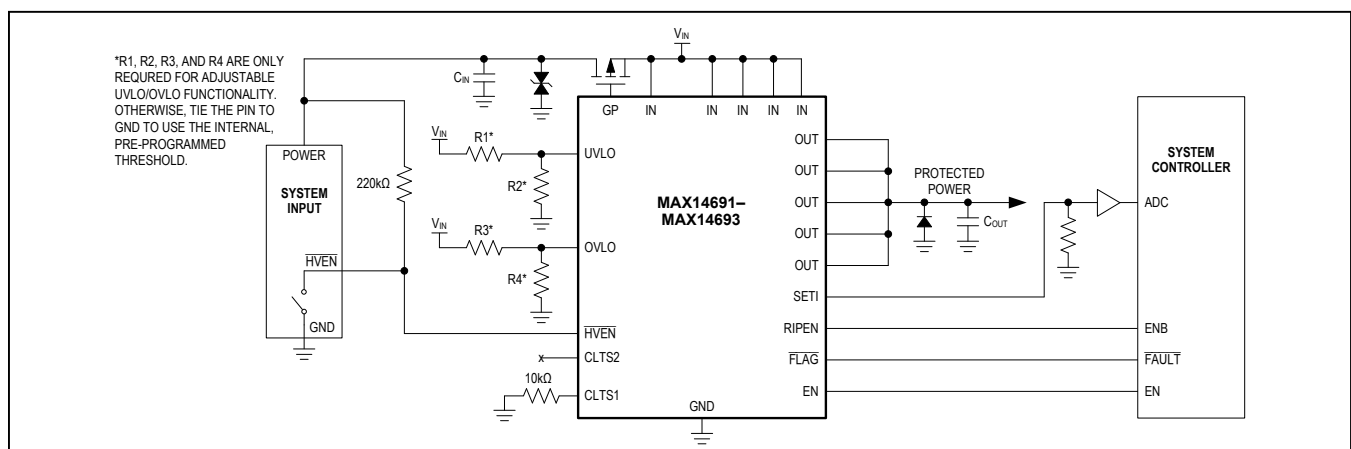

Absolute Maximum Ratings

(All voltages referenced to GND.)

| | |
|--|---|
| IN (Note 1)..... | -0.3V to +60V |
| OUT..... | -0.3V to $V_{IN} + 0.3V$ |
| HVEN (Note 1)..... | -0.3V to $V_{IN} + 0.3V$ |
| GP..... | max (-0.3V, $V_{IN} - 20V$) to $V_{IN} + 0.3V$ |
| UVLO, OVLO..... | -0.3V to min ($V_{IN} + 0.3V$, 20V) |
| FLAG, EN, RIPEN, CLTS1, CLTS2..... | -0.3V to +6V |
| Maximum Current into IN (DC) (Note 2)..... | 6A |

| | |
|--|--------------------------------------|
| SETI..... | -0.3V to min ($V_{IN} + 0.3V$, 6V) |
| Continuous Power Dissipation ($T_A = +70^\circ C$) | |
| TQFN (derate 34.5mW/°C above +70°C)..... | 2758mW |
| Operating Temperature Range..... | -40°C to +125°C |
| Junction Temperature..... | +150°C |
| Storage Temperature Range..... | -65°C to +150°C |
| Lead Temperature (soldering, 10s)..... | +300°C |
| Soldering Temperature (reflow)..... | +260°C |

Note 1: An external pFET or diode is required to achieve negative input protection.

Note 2: DC current-limited by R_{SETI} , as well as by thermal design.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Package Thermal Characteristics (Note 3)

TQFN

Junction-to-Ambient Thermal Resistance (θ_{JA}).....29°C/W

Junction-to-Case Thermal Resistance (θ_{JC}).....2°C/W

Note 3: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

Electrical Characteristics

($V_{IN} = 5.5V$ to 58V, $T_A = -40^\circ C$ to +125°C, unless otherwise noted. Typical values are at $V_{IN} = 12V$, $T_A = +25^\circ C$) (Note 4)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|------------------|--|------|------|------|---------|
| POWER SUPPLY | | | | | | |
| IN Voltage Range | V_{IN} | | 5.5 | | 58 | V |
| Shutdown IN Current | I_{SHDN} | $V_{EN} = 0V, V_{HVEN} = 5V, V_{IN} < 24V$ | | 5.25 | 8 | μA |
| | | $V_{EN} = 0V, V_{HVEN} = 5V$ | | 5.25 | 14 | |
| Supply Current | I_{IN} | $V_{IN} = V_{OUT} = 24V, V_{HVEN} = 0V$ | | 1.4 | 1.8 | mA |
| Shutdown OUT Current | I_{OFF} | $V_{EN} = 0V, V_{HVEN} = 5V$ | | 50 | 100 | μA |
| UVLO, OVLO | | | | | | |
| Internal UVLO Trip Level | V_{UVLO} | V_{IN} falling, UVLO trip point | 11.5 | 12 | 12.5 | V |
| | | V_{IN} rising | 11.9 | 12.4 | 13 | |
| UVLO Hysteresis | | % of typical UVLO | | 3 | | % |
| Internal OVLO Trip Level | V_{OVLO} | V_{IN} falling | 33 | 35 | 36.4 | V |
| | | V_{IN} rising, OVLO trip point | 34.5 | 36 | 37.4 | |
| OVLO Hysteresis | | % of typical OVLO | | 3 | | % |
| External UVLO Adjustment Range (Note 5) | | | 5.5 | | 24 | V |
| External UVLO Select Voltage | V_{UVLO_SEL} | | 0.15 | 0.38 | 0.5 | V |
| External UVLO Leakage Current | I_{UVLO_LEAK} | | -250 | | +250 | nA |
| External OVLO Adjustment Range (Note 5) | | | 6 | | 40 | V |
| External OVLO Select Voltage | V_{OVLO_SEL} | | 0.15 | 0.38 | 0.5 | V |

Electrical Characteristics (continued)(V_{IN} = 5.5V to 58V, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at V_{IN} = 12V, T_A = +25°C) (Note 4)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|---|---|------|------|------|-------|
| External OVLO Leakage Current | I _{OVLO_LEAK} | | -250 | | +250 | nA |
| External UVLO/OVLO Set Voltage | V _{SET} | | 1.18 | 1.22 | 1.27 | V |
| Undervoltage Trip Level on OUT | V _{OVLO_OUT} | V _{OUT} falling, UVLO trip point | 11.5 | 12 | 12.5 | V |
| | | V _{OUT} rising | 11.9 | 12.4 | 13 | |
| GP | | | | | | |
| Gate Clamp Voltage | V _{GP} | | 10 | 16.1 | 20 | V |
| Gate Active Pullup | | | | 25 | | Ω |
| Gate Active Pulldown | | V _{EN} = 5V | | 105 | | μA |
| INTERNAL FETs | | | | | | |
| Internal FETs On-Resistance | R _{ON} | I _{LOAD} = 100mA, V _{IN} ≥ 10V, T _A = +25°C | | 31 | 42 | mΩ |
| Current-Limit Adjustment Range | I _{LIM} | | 0.6 | | 6 | A |
| Current-Limit Accuracy | I _{LIM_ACC} | 1A ≤ I _{LIM} ≤ 6A (T _A = +25°C) | -10 | | +10 | % |
| | | 0.6A ≤ I _{LIM} ≤ 6A | -15 | | +15 | |
| FLAG Assertion Drop Voltage Threshold | V _{FA} | Increase in (V _{IN} - V _{OUT}) drop until FLAG asserts, V _{IN} = 24V | | 490 | | mV |
| Reverse Current-Blocking Threshold | V _{RIB} | V _{IN} - V _{OUT} | 0 | -5 | -10 | mV |
| Reverse Current-Blocking Response Time | t _{RIB} | | | 11 | | μs |
| Reverse-Blocking Supply Current | I _{RBS} | V _{OUT} = 24V | | 2300 | 3800 | μA |
| LOGIC INPUT (HVEN, CLTS1, CLTS2, EN, RIPEN) | | | | | | |
| HVEN Threshold Voltage | V _{HVEN_TH} | | 1 | 2 | 3.1 | V |
| HVEN Threshold Hysteresis | | | | 5 | | % |
| HVEN Input Leakage Current | I _{HVEN_LEAK} | V _{HVEN} = 58V | | 42 | 66 | μA |
| EN, RIPEN, CLTS1, CLTS2 Input Logic-High | V _{IH} | | 1.4 | | | V |
| EN, RIPEN, CLTS1, CLTS2 Input Logic-Low | V _{IL} | | | | 0.4 | V |
| EN, RIPEN Input Leakage Current | I _{EN_LEAK} , I _{RIPEN_LEAK} | V _{EN} , V _{RIPEN} = 0V, 5V | -1 | | +1 | μA |
| CLTS_ Leakage Current | | CLTS_ = GND | | 25 | | μA |
| LOGIC OUTPUT (FLAG) | | | | | | |
| Logic-Low Voltage | | I _{SINK} = 1mA | | | 0.4 | V |
| Input Leakage Current | | V _{IN} = 5.5V, FLAG deasserted | | | 1 | μA |

Electrical Characteristics (continued)(V_{IN} = 5.5V to 58V, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at V_{IN} = 12V, T_A = +25°C) (Note 4)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|-------------------------------------|----------------------|---|-------|------|------|-------|
| SETI | | | | | | |
| RSETI × I _{LIM} | V _{RI} | See the <i>Setting the Current-Limit Threshold</i> section | 1.5 | | | V |
| Current Mirror Output Ratio | C _{IRATIO} | | 25000 | | | |
| DYNAMIC PERFORMANCE (Note 6) | | | | | | |
| Switch Turn-On Time | t _{ON} | V _{IN} = 24V, switch OFF to ON, R _{LOAD} = 240Ω, I _{LIM} = 1A, C _{OUT} = 4.7μF, V _{OUT} from 20% to 80% of V _{IN} | 68 | | | μs |
| OVP Switch Response Time | t _{OVP_RES} | | 3 | | | μs |
| Overcurrent Switch Response Time | t _{OCP_RES} | I _{LIM} = 4A | 3 | | | μs |
| Startup Timeout | t _{STO} | Initial start current-limit foldback timeout (Figure 1) | 1090 | 1200 | 1320 | ms |
| Startup Initial Time | t _{STI} | Current is continuously limited to 1x/1.5x/2x in this interval (Figure 1) | 21.8 | 24 | 26.4 | ms |
| IN Debounce Time | t _{DEB} | Interval between V _{IN} > V _{UVLO} and V _{OUT} = 10% of V _{IN} (Figure 2) | 1 | 1.5 | 2.1 | ms |
| Blanking Time | t _{BLANK} | (Figures 3 and 4) | 21.8 | 24 | 26.4 | ms |
| Autoretry Time | t _{RETRY} | (Figure 3, Note 7) | 554 | 720 | 792 | ms |
| THERMAL PROTECTION | | | | | | |
| Thermal Foldback | T _{J_FB} | | 150 | | | °C |
| Thermal Shutdown | T _{J_MAX} | | 165 | | | °C |
| Thermal Shutdown Hysteresis | | | 10 | | | °C |

Note 4: All devices are 100% production-tested at T_A = +25°C. Specifications over the operating temperature range are guaranteed by design.

Note 5: Not production-tested, user-adjustable. See the *Overvoltage Lockout (OVLO)* and *Undervoltage Lockout (UVLO)* sections.

Note 6: All timing is measured using 20% and 80% levels, unless otherwise specified.

Note 7: The autoretry time-to-blanking time ratio is fixed and is equal to 30.

Timing Diagrams

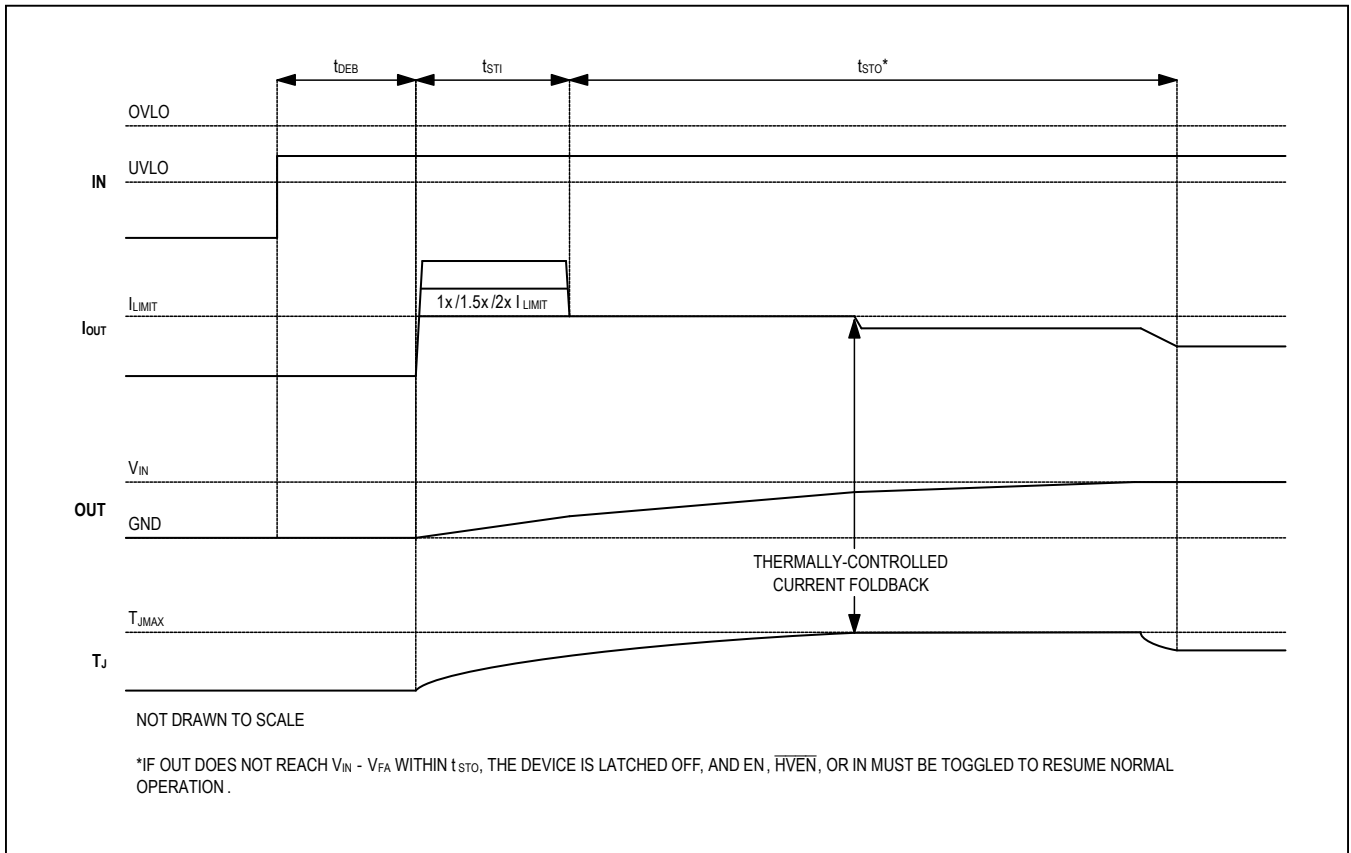









Figure 1. Startup Timing



Figure 2. Debounce Timing








Typical Operating Characteristics

($V_{IN} = 12V$, $C_{IN} = 1\mu F$, $C_{OUT} = 4.7\mu F$, $T_A = +25^\circ C$, unless otherwise noted.)

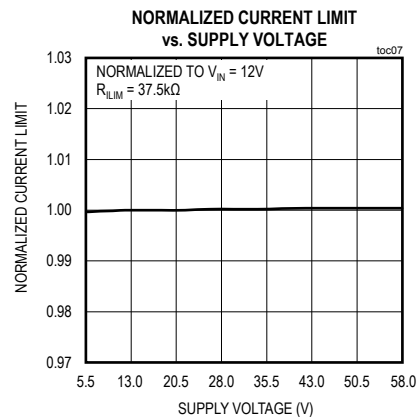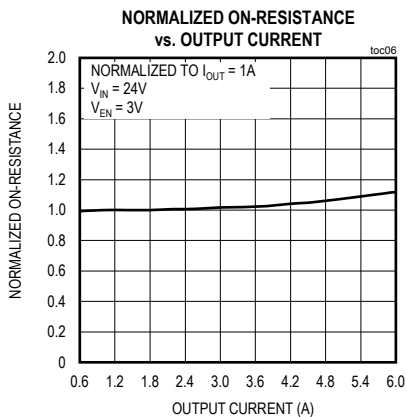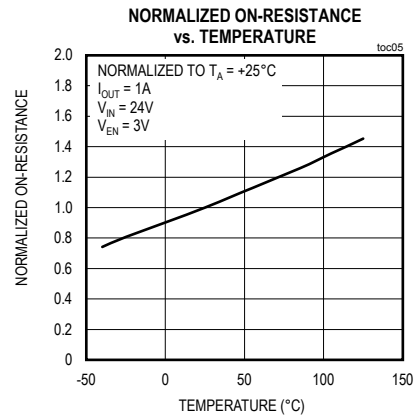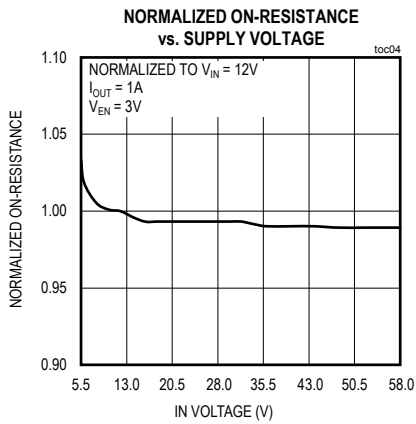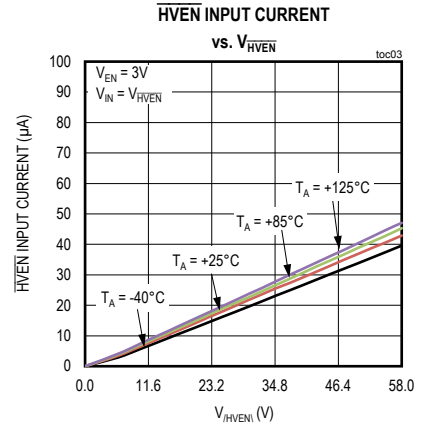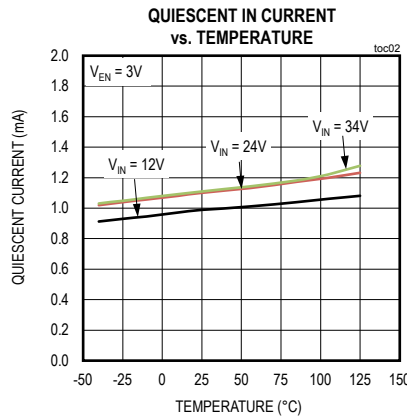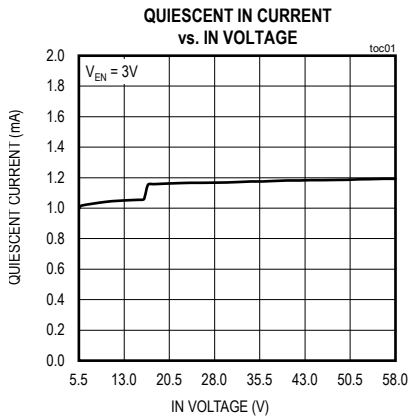






Typical Operating Characteristics (continued)

($V_{IN} = 12V$, $C_{IN} = 1\mu F$, $C_{OUT} = 4.7\mu F$, $T_A = +25^\circ C$, unless otherwise noted.)

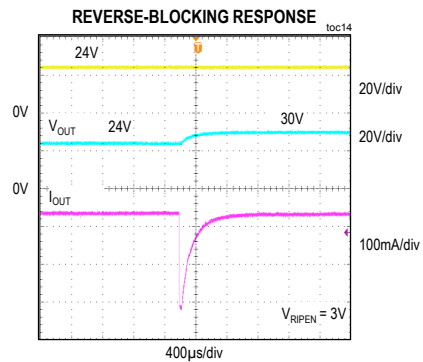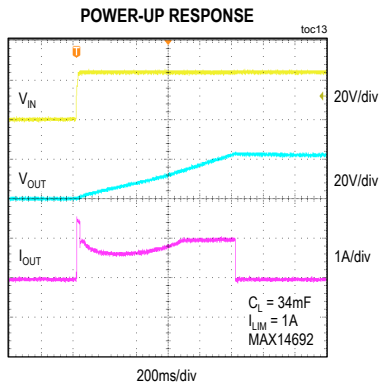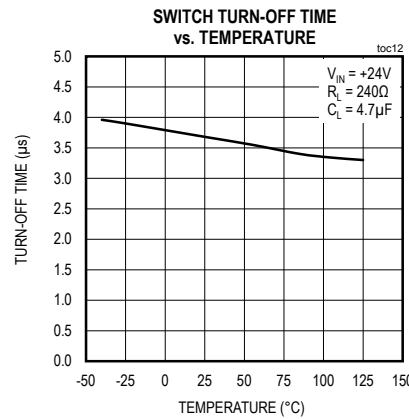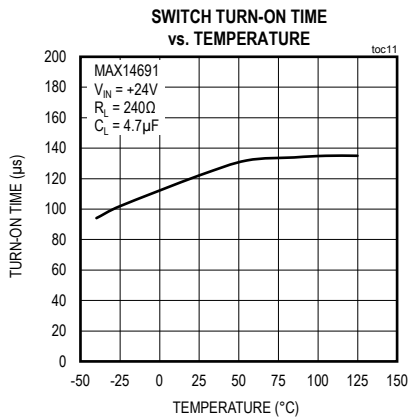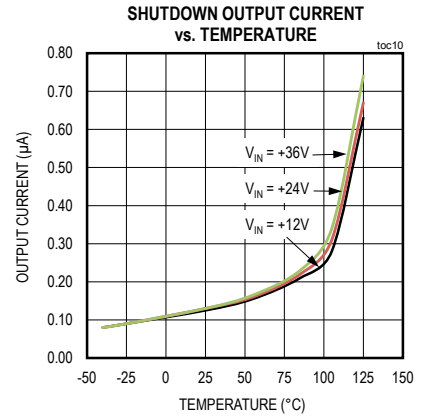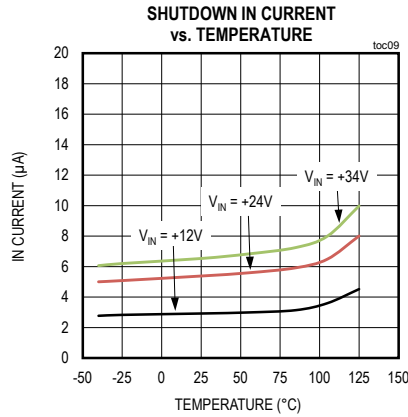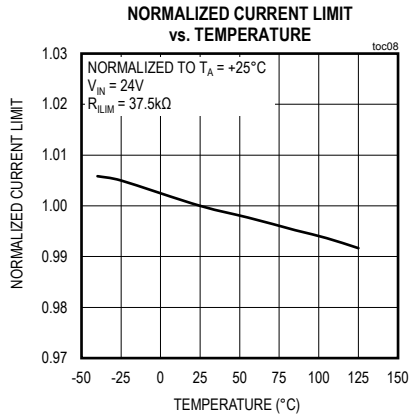


Typical Operating Characteristics

($V_{IN} = 12V$, $C_{IN} = 1\mu F$, $C_{OUT} = 4.7\mu F$, $T_A = +25^\circ C$, unless otherwise noted.)

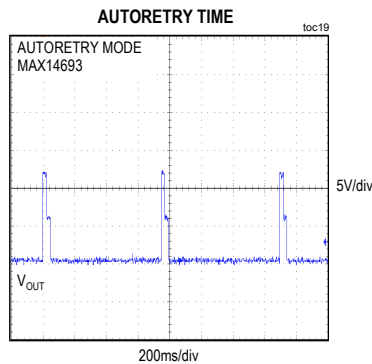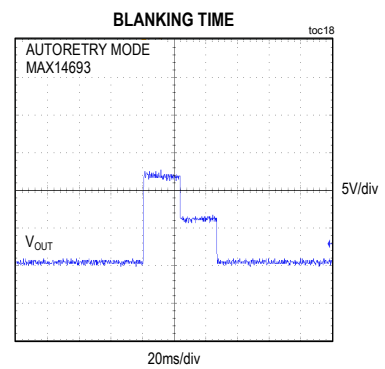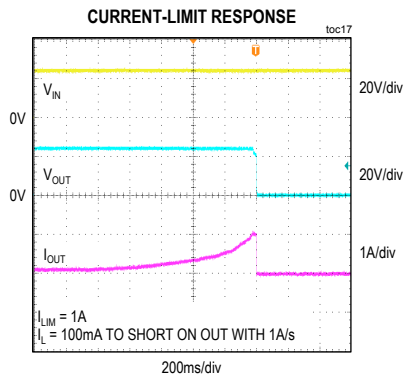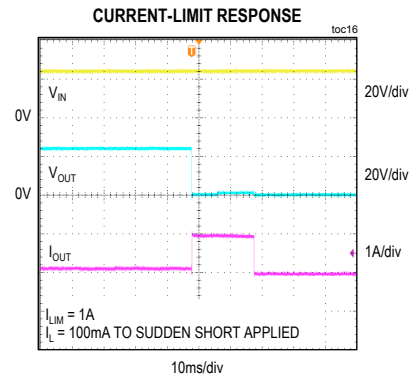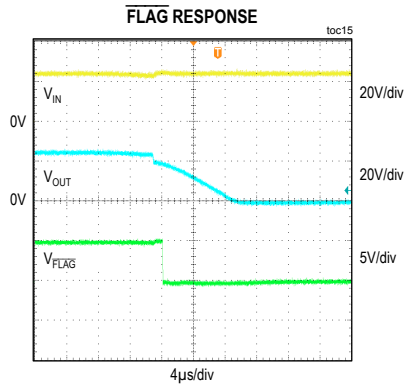


Pin Configurations

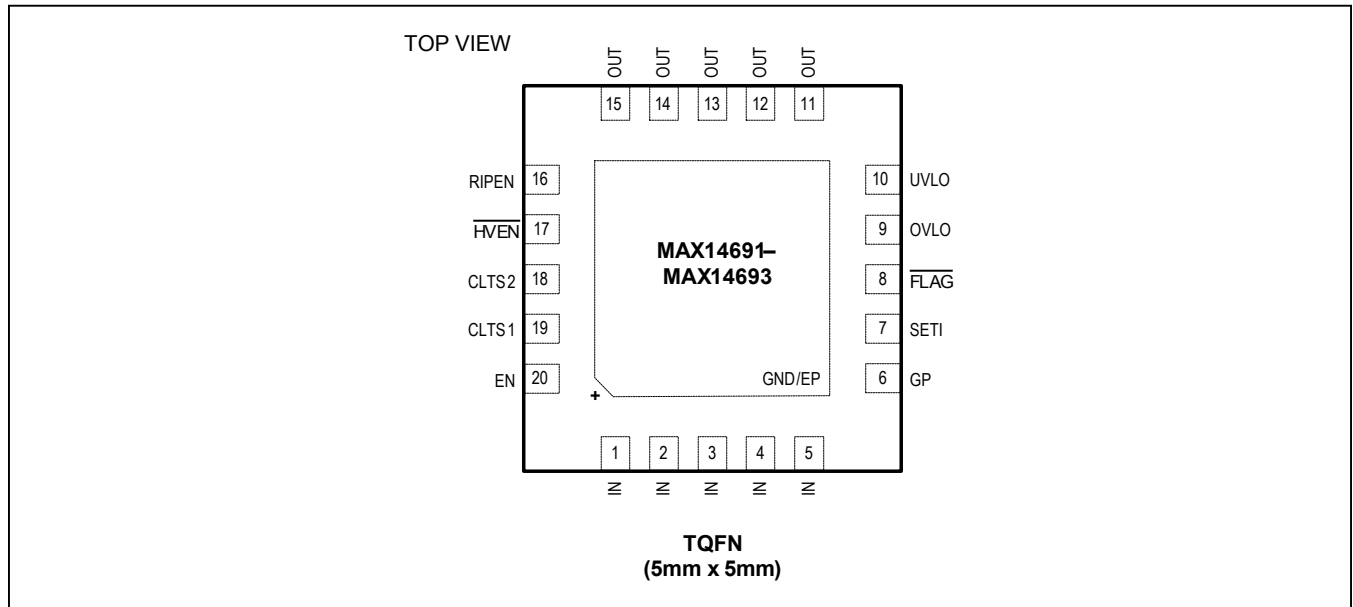

Pin Description

| PIN | NAME | FUNCTION |
|-------|--------|---|
| 1–5 | IN | Overshoot Protection Input. Bypass IN to ground with a 1µF ceramic capacitor for ±15kV Human Body Model ESD protection on IN. |
| 6 | GP | Gate Driver Output for External pFET. |
| 7 | SETI | Overload Current-Limit Adjust. Connect a resistor from SETI to GND to program the overcurrent limit. SETI must be connected to a resistor. If SETI is connected to GND during startup, then the switch does not turn on. Do not connect more than 30pF to SETI. |
| 8 | FLAG | Open Drain Fault Indicator Output. FLAG asserts low when the $V_{IN} - V_{OUT}$ voltage exceeds V_{FA} , reverse current is detected, thermal shutdown mode is active, OVLO or UVLO threshold is reached, or SETI is connected to GND. |
| 9 | OVLO | Externally-Programmable Overvoltage-Lockout Threshold. Connect OVLO to GND to use the default internal OVLO threshold. Connect OVLO to an external resistor-divider to define a threshold externally and override the preset internal OVLO threshold. |
| 10 | UVLO | Externally Programmable Undervoltage-Lockout Threshold. Connect UVLO to GND to use the default internal UVLO threshold. Connect UVLO to an external resistor-divider to define a threshold externally and override the preset internal UVLO threshold. |
| 11–15 | OUT | Switch Output. Bypass OUT to GND with a 4.7µF ceramic capacitor placed as close as possible to the device. |
| 16 | RIPEN | Reverse-Current Protection Enable. Connect RIPEN to GND to disable the reverse-current flow protection. Connect RIPEN to logic-high to activate the reverse-current flow protection. |
| 17 | HVEN | 58V Capable Active-Low Enable Input. See Table 1. |
| 18 | CLTS2 | Current-Limit Type Select 2. See Table 2. |
| 19 | CLTS1 | Current-Limit Type Select 1. See Table 2. |
| 20 | EN | Active-High Enable Input. See Table 1. |
| — | GND/EP | Ground/Exposed Pad. Connect to a large copper ground plane to maximize thermal performance. |

Functional Diagram

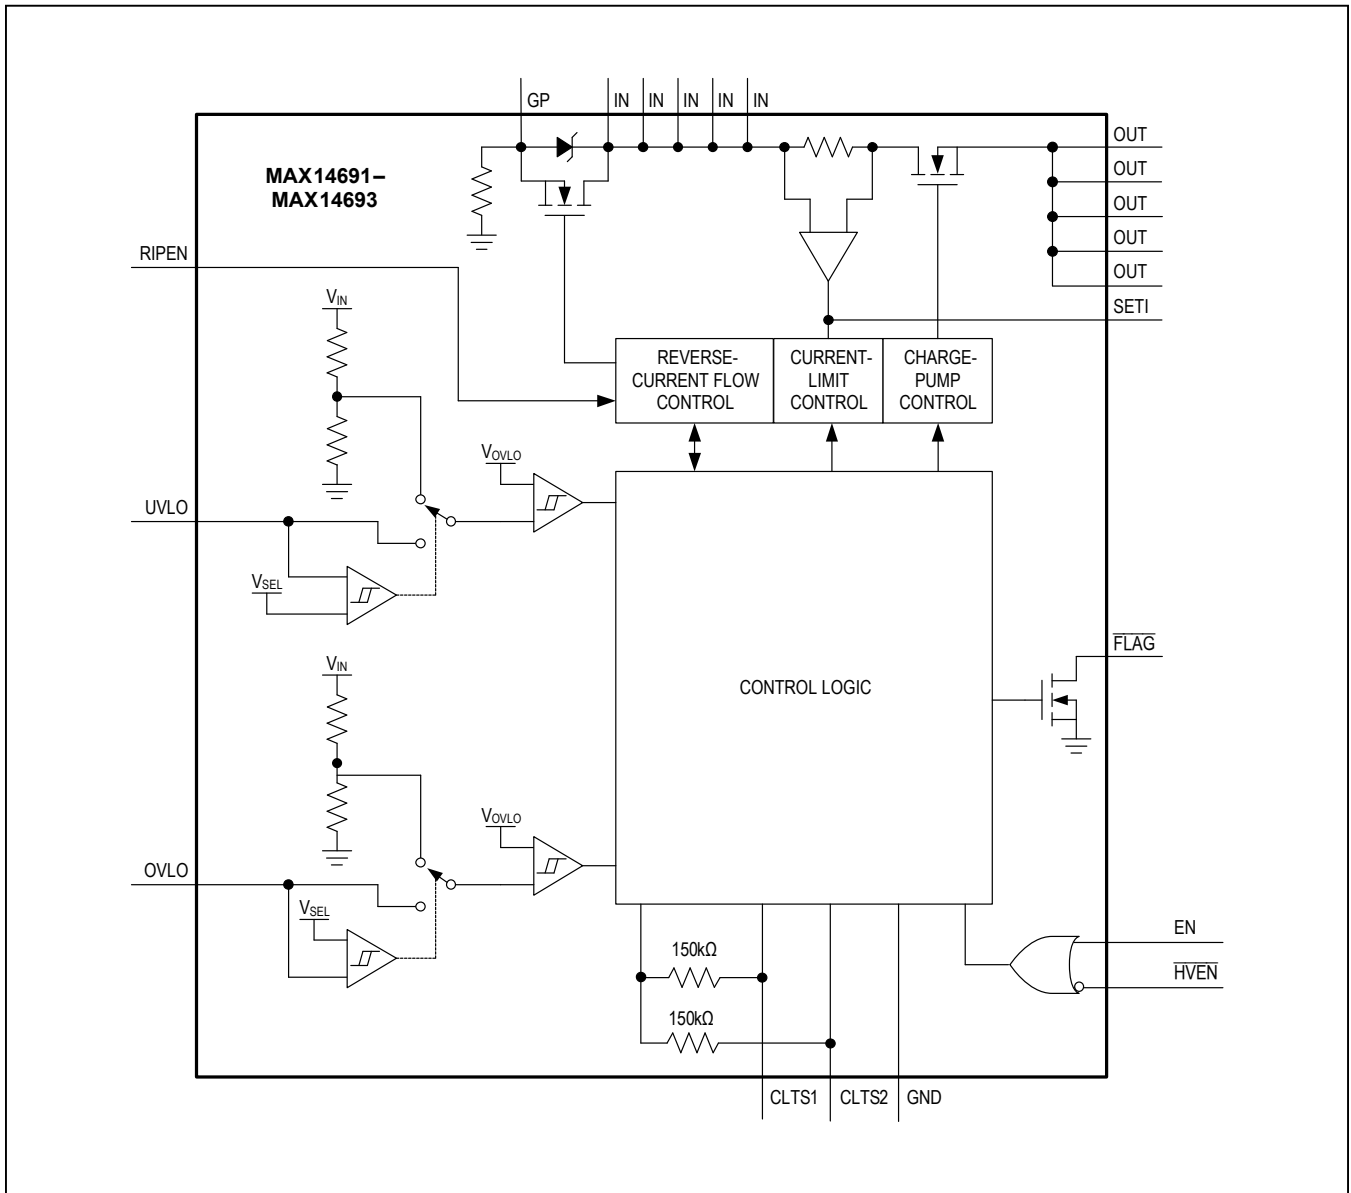

Detailed Description

The MAX14691–MAX14693 adjustable overvoltage, undervoltage, and overcurrent protection devices guard systems against overcurrent faults in addition to positive overvoltage and reverse-voltage faults. When used with an optional external p-channel MOSFET, the devices also protect downstream circuitry from voltage faults up to $\pm 60\text{V}$. The devices feature a low, $31\text{m}\Omega$, on-resistance integrated FET. During startup, the devices are designed to charge large capacitances on the output in a continuous mode for applications where large reservoir capacitors are used on the inputs to downstream devices. Additionally, the MAX14691, MAX14692, and MAX14693 feature a dual-stage current-limit mode in which the current is continuously limited to 1x, 1.5x, and 2x the programmed limit, respectively, for a short time after startup. This enables faster charging of large loads during startup.

The devices feature the option to set the overvoltage-lockout (OVLO) and undervoltage-lockout (UVLO) thresholds manually using external voltage-dividers or to use the factory-preset internal thresholds by connecting the OVLO and/or UVLO pin(s) to GND. The adjustable overvoltage range of the devices is 6V to 40V, while the adjustable undervoltage range is 5.5V to 24V. The factory-preset internal threshold for the devices is 36V (typ), with the preset internal UVLO threshold being 12V (typ).

The devices' programmable current-limit threshold can be set for currents up to 6A in autoretry, latching, or continuous-fault-response mode. When the device is set to autoretry mode and the current exceeds the threshold for more than 24ms (typ), the internal FET is turned off for 720ms (typ), then turned back on. If the fault is still present, the cycle repeats. In latching mode, if a fault is present for more than 24ms (typ), the internal FET is turned off until enable is toggled or the power is cycled. In continuous mode, the current is limited continuously to the programmed current-limit value. In all modes, $\overline{\text{FLAG}}$ asserts if $V_{\text{IN}} - V_{\text{OUT}}$ is greater than the $\overline{\text{FLAG}}$ assertion drop voltage threshold (V_{FA}).

Startup Control

The devices feature a dual-stage startup sequence that continuously limits the current to 1x/1.5x/2x the set current limit during the startup initial time (t_{STI}), allowing large capacitors present on the output of the switch to be rapidly charged. The MAX14691 limits the current to 1x the set limit during this period while the MAX14692 and MAX14693 limit the current to 1.5x and 2x the set limit, respectively. If the temperature of any device rises to the thermal-foldback threshold ($T_{\text{J_FB}}$), the device enters

power-limiting mode (Figure 1). In this mode, the device thermally regulates the current through the switch to protect itself while still delivering as much current as possible to the output regardless of the current-limit type selected. If the output is not charged within the startup timeout period (t_{STO}), the switch turns off and $\overline{\text{IN}}$, $\overline{\text{EN}}$, or $\overline{\text{HVEN}}$ must be toggled to resume normal operation.

Overvoltage Lockout (OVLO)

The devices feature two methods for determining the OVLO threshold. By connecting the OVLO pin to GND, the preset internal OVLO threshold of 36V (typ) is selected. If the voltage at OVLO rises above the OVLO select threshold ($V_{\text{OVLO_SEL}}$), the device enters adjustable OVLO mode. Connect an external voltage-divider to the OVLO pin, as shown in the [Typical Application Circuit](#) to adjust the OVLO threshold. $R_3 = 2.2\text{M}\Omega$ is a good starting value for minimum current consumption. Since V_{SET} is known, R_3 has been chosen, and V_{OVLO} is the target OVLO value, R_4 can then be calculated by the following equation:

$$R_4 = \frac{R_3 \times V_{\text{SET}}}{V_{\text{OVLO}} - V_{\text{SET}}}$$

Undervoltage Lockout (UVLO)

The devices feature two methods for determining the UVLO threshold. By connecting the UVLO pin to GND, the preset, internal UVLO threshold of 12V (typ) is selected. If the voltage at UVLO rises above the UVLO select threshold ($V_{\text{UVLO_SEL}}$), the device enters adjustable UVLO mode. Connect an external voltage-divider to the UVLO pin, as shown in the [Typical Application Circuit](#) to adjust the UVLO threshold. $R_1 = 2.2\text{M}\Omega$ is a good starting value for minimum current consumption. Since V_{SET} is known, R_1 has been chosen, and V_{UVLO} is the target value, R_2 can then be calculated by the following equation:

$$R_2 = \frac{R_1 \times V_{\text{SET}}}{V_{\text{UVLO}} - V_{\text{SET}}}$$

Switch Control

There are two independent enable inputs on the devices: $\overline{\text{HVEN}}$ and $\overline{\text{EN}}$. $\overline{\text{HVEN}}$ is a high-voltage-capable input, accepting signals up to 58V. $\overline{\text{EN}}$ is a low-voltage input, accepting a maximum voltage of 5V. In case of a fault condition, toggling $\overline{\text{HVEN}}$ or $\overline{\text{EN}}$ resets the fault. The enable inputs control the state of the switch based on the truth table (Table 1).

Table 1. Enable Inputs

| HVEN | EN | SWITCH STATUS |
|------|----|---------------|
| 0 | 0 | ON |
| 0 | 1 | ON |
| 1 | 0 | OFF |
| 1 | 1 | ON |

Input Debounce

The devices feature a built-in input debounce time (t_{DEB}). The debounce time is a delay between a POR event and the switch being turned on. If the input voltage rises above the UVLO threshold voltage or if, with a voltage greater than V_{UVLO} present on IN, the enable pins toggle to the on state, the switch turns on after t_{DEB} . In cases where the voltage at IN falls below V_{UVLO} before t_{DEB} has passed, the switch remains off (Figure 2). If the voltage at OUT is already above V_{UVLO_OUT} when the device is turned on through either enable pin or coming out of OVLO, there is no debounce interval. This is due to the device already being out of the POR condition with OUT above V_{UVLO_OUT} .

Reverse-Current Blocking

The devices feature current-blocking functionality. To enable the reverse-current blocking feature, pull RIPEN high. With RIPEN high, if a reverse-current condition is detected, the internal nFET and the external pFET are turned off for 2.4ms. After this time, the switches are briefly switched back on to determine whether the reverse current is still present. Once the reverse-current condition has been removed, the nFET and pFET are turned back on and the dual-stage startup control mechanism, defined in the [Startup Control](#) section above, is applied.

Current-Limit Type Select

The MAX14691–MAX14693 feature three selectable current-limiting modes. During power-up, all devices default to continuous mode and follow the procedure defined in the [Startup Control](#) section. Once the part has been successfully powered on and t_{STO} has expired, the device

Table 2. Current-Limit Type Select

| CLTS2 | CLTS1 | CURRENT-LIMIT TYPE |
|-------|-------|--------------------|
| 0 | 0 | LATCHOFF MODE |
| 0 | 1 | AUTORETRY MODE |
| 1 | 0 | CONTINUOUS MODE |
| 1 | 1 | CONTINUOUS USED |

senses the condition of CLTS1 and CLTS2. The condition of CLTS1 and CLTS2 sets the current-limit mode type according to [Table 2](#).

Autoretry Mode (Figure 3)

In autoretry current-limit mode, when current through the device reaches the threshold, the t_{BLANK} timer begins counting. The \overline{FLAG} output asserts low when the voltage drop across the switch rises above V_{FA} . If the overcurrent condition is present for t_{BLANK} , the switch is turned off. The timer resets if the overcurrent condition disappears before t_{BLANK} has elapsed. A retry time delay (t_{RETRY}) starts immediately once t_{BLANK} has elapsed. During the retry time, the switch remains off and, once t_{RETRY} has elapsed, the switch is turned back on. If the fault still exists, the cycle is repeated and \overline{FLAG} remains low. If the fault has been removed, the switch stays on.

The autoretry feature reduces system power in case of overcurrent or short-circuit conditions. When the switch is on during t_{BLANK} time, the supply current is held at the current limit. When the switch is off during t_{RETRY} time, there is no current through the switch. Thus, the output current is much less than the programmed current limit. Calculate the average output current using the following equation:

$$I_{LOAD} = I_{LIM} \left[\frac{t_{BLANK} + t_{STI} \times K}{t_{BLANK} + t_{RETRY} + t_{STI}} \right]$$

where K is the multiplication factor of the initial current limit (1x, 1.5x or 2x). With a 24ms (typ) t_{BLANK} , 24ms t_{STI} , $K = 1$ and 720ms (typ) t_{RETRY} , the duty cycle is 3.1%, resulting in 97% power saving when compared to the switch being on the entire time.

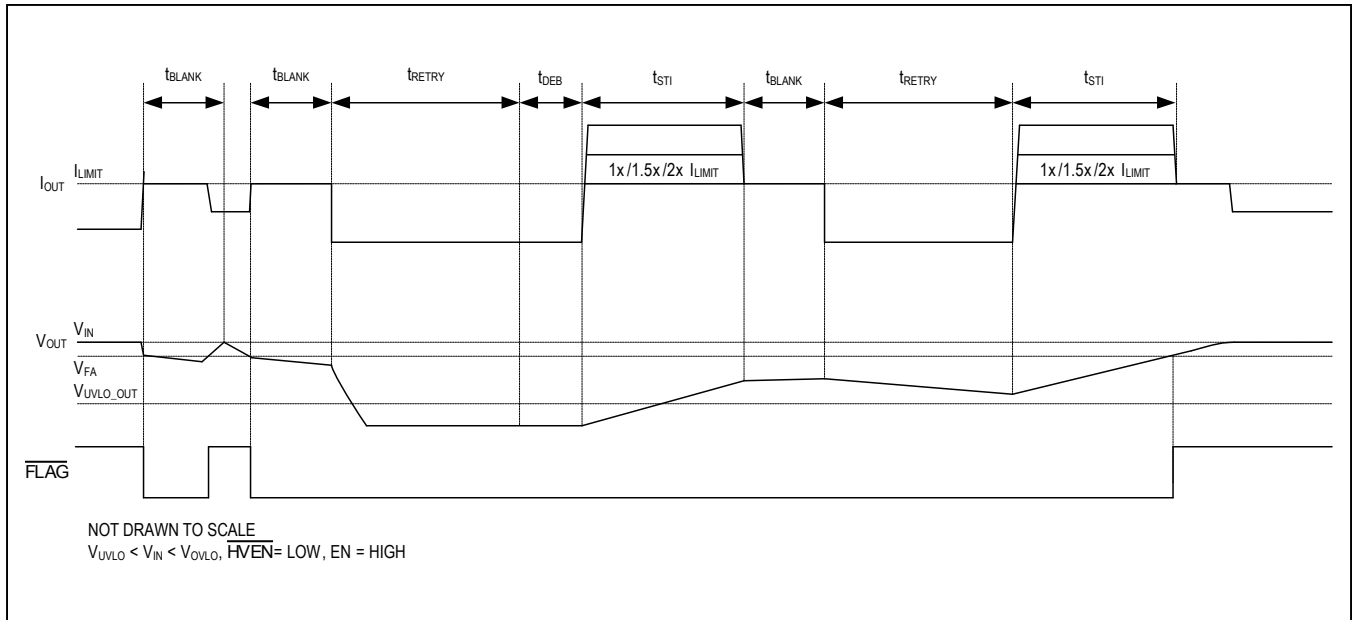


Figure 3. Autoretry Fault Diagram

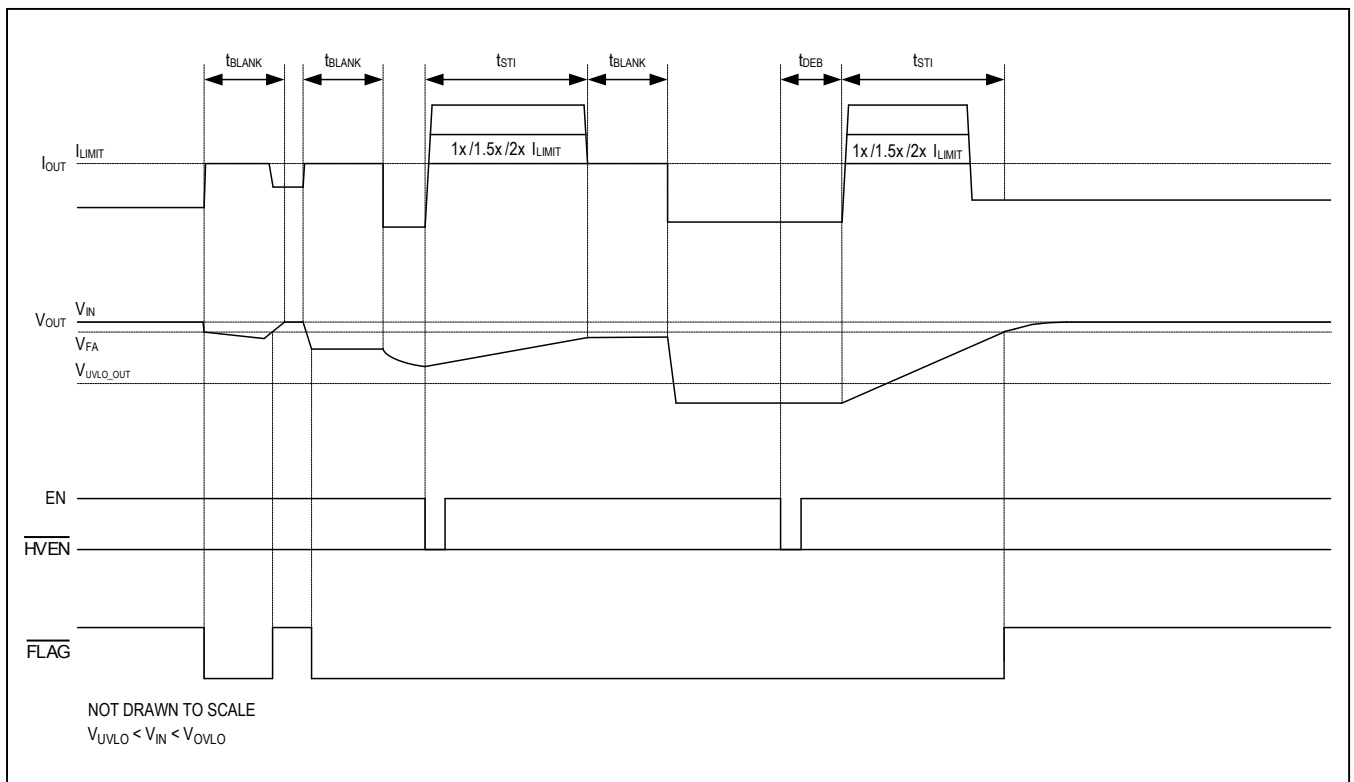


Figure 4. Latchoff Fault Diagram

Latchoff Mode (Figure 4)

In latchoff current-limit mode, when current through the device reaches the threshold, the t_{BLANK} timer begins counting. \overline{FLAG} asserts when the voltage drop across the switch rises above V_{FA} . The timer resets if the overcurrent condition disappears before t_{BLANK} has elapsed. The switch turns off if the overcurrent condition remains for the blanking time. The switch remains off until the control logic (EN or HVEN) is toggled or the input voltage is cycled.

Continuous Mode (Figure 5)

In continuous current-limit mode, when current through the device reaches the threshold, the device limits the current to the programmed limit. \overline{FLAG} asserts when

the voltage drop across the switch rises above V_{FA} , and deasserts when it falls below V_{FA} .

Fault Indicator (\overline{FLAG}) Output

\overline{FLAG} is an open-drain fault-indicator output. It requires an external pullup resistor to a DC supply. \overline{FLAG} asserts when any of the following conditions occur:

- $V_{IN} - V_{OUT} > V_{FA}$
- Reverse-current protection is tripped
- Die temperature exceeds +165°C
- SETI is connected to ground
- UVLO threshold has not been reached
- OVLO threshold is reached

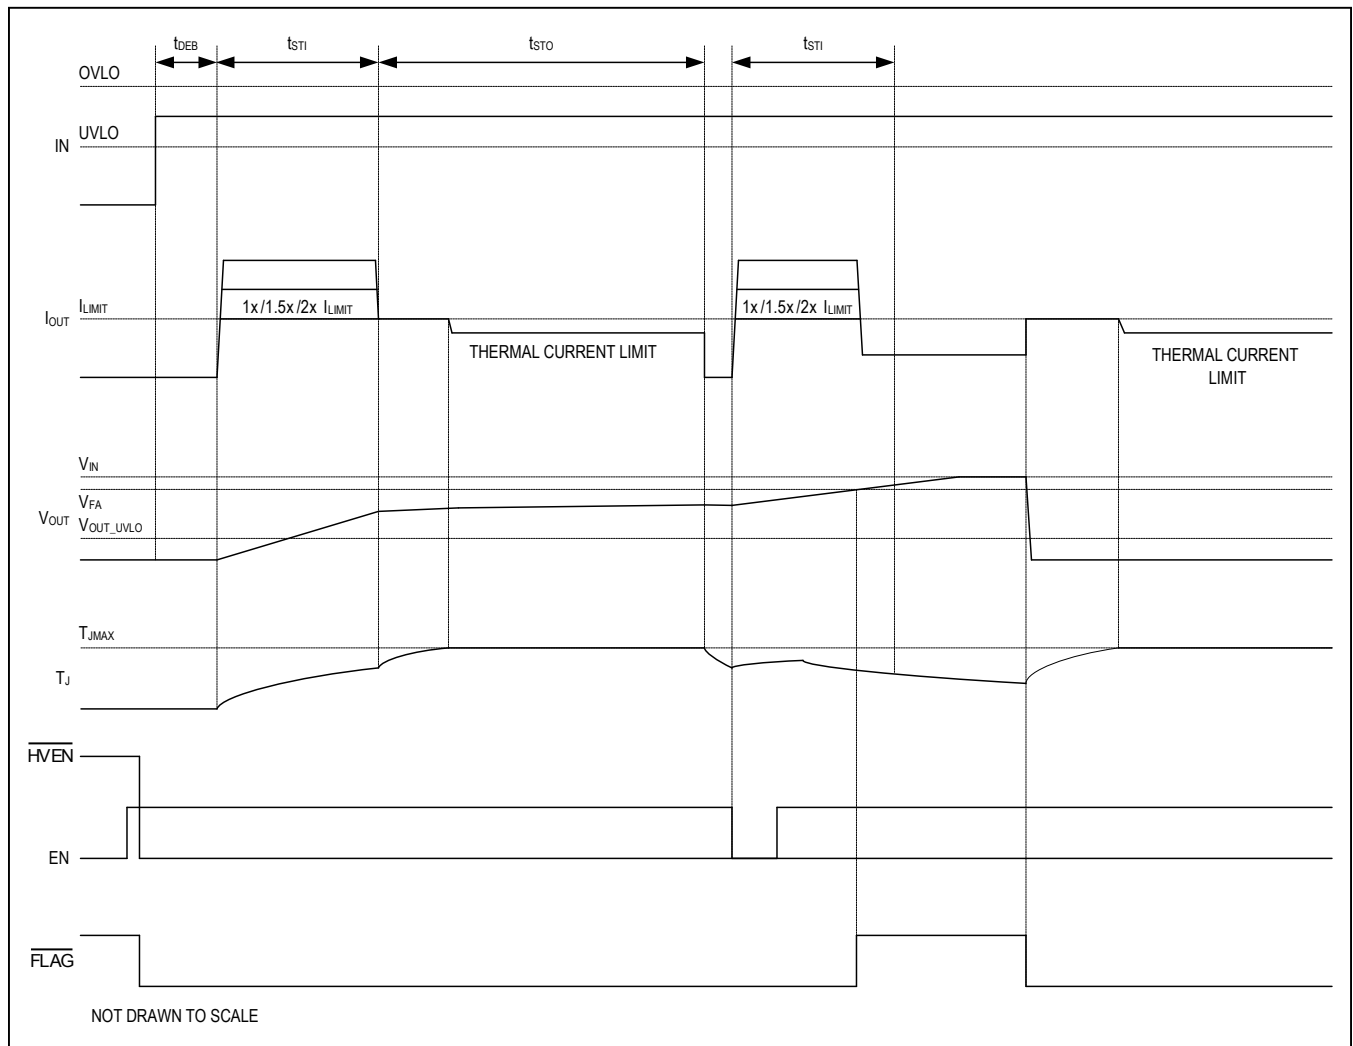


Figure 5. Continuous Fault Diagram

Thermal Shutdown Protection

Thermal-shutdown circuitry protects the devices from overheating. The switch turns off and $\overline{\text{FLAG}}$ asserts when the junction temperature exceeds +165°C (typ). The devices exit thermal shutdown and resume normal operation once the junction temperature cools by 10°C (typ) when the device is in autoretry or continuous current-limiting mode. When in lathoff mode, the device remains latched off until the input voltage is cycled or one of the enable pins is toggled.

The thermal shutdown technology built into the devices behave in accordance with the selected current-limit mode. While the devices are in autoretry mode, the thermal limit uses the autoretry timing when coming out of a fault condition. When the devices detect an overtemperature fault, the switch turns off. Once the temperature of the junction falls below the falling thermal threshold, the device turns on after the time interval t_{RETRY} . In lathoff mode, the device latches off until the input is cycled or one of the enable pins is toggled. In continuous current-limiting mode, the device turns off while the temperature is over the limit, then turns back on after t_{DEB} when the temperature reaches the falling threshold. There is no retry time for thermal protection.

Applications Information

Setting the Current-Limit Threshold

Connect a resistor between SET1 and ground to program the current-limit threshold for the devices. Leaving SET1 unconnected sets the current-limit threshold to 0A and, since connecting SET1 to ground is a fault condition, this causes the switch to remain off and $\overline{\text{FLAG}}$ to assert. Use the following formula to calculate the current-limit threshold:

$$R_{\text{SET1}}(\text{k}\Omega) = \frac{V_{\text{RI}}(\Omega \times \text{A})}{I_{\text{LIM}}(\text{mA})} \times C_{\text{IRATIO}}$$

Do not use a R_{SET1} smaller than 6k Ω . Table 3 shows current-limit thresholds for different resistor values at SET1.

A current mirror with a ratio of C_{IRATIO} is implemented with a current-sense auto-zero operational amplifier. The mirrored current of the IN-OUT FET is provided on the SET1 pin. Therefore, the voltage (V_{SET1}) read on the SET1 pin should be interpreted as the current through the IN-OUT FET, as shown below:

$$I_{\text{IN-OUT}} = I_{\text{SET1}} \times C_{\text{IRATIO}} = \frac{V_{\text{SET1}}(\text{V})}{R_{\text{SET1}}(\text{k}\Omega)} \times C_{\text{IRATIO}} = \frac{V_{\text{SET1}}(\text{V})}{V_{\text{RI}}(\text{V})} \times I_{\text{LIM}}$$

IN Bypass Capacitor

Connect a minimum of 1 μF capacitor from IN to GND to limit the input voltage drop during momentary output short-circuit conditions. Larger capacitor values further reduce the voltage droop at the input caused by load transients.

Hot Plug-In

In many power applications, an input filtering capacitor is required to lower the radiated emission and enhance the ESD capability, etc. In hot-plug applications, parasitic cable inductance, along with the input capacitor, causes overshoot and ringing when a powered cable is suddenly connected to the input terminal. This effect causes the protection device to see almost twice the applied voltage. An input voltage of 24V can easily exceed 40V due to ringing. The devices contain internal protection against hot-plug input transient. However, in the case where the harsh industrial EMC test is required, use a transient voltage suppressor (TVS) placed close to the input terminal that is capable of limiting the input surge to 60V.

OUT Capacitance

For stable operation over the full temperature range and over the entire programmable current-limit range, connect a 4.7 μF ceramic capacitor from OUT to ground. Other circuits connected to the output of the device may introduce additional capacitance, but it should be noted that excessive output capacitance on the devices can cause faults. If the capacitance is too high, the devices may not be able to charge the capacitor before the startup timeout.

Table 3. Current-Limit Threshold vs. Resistor Values

| R_{SET1} (k Ω) | CURRENT LIMIT (A) |
|---------------------------------|-------------------|
| 62.5 | 0.6 |
| 37.5 | 1.0 |
| 25.0 | 1.5 |
| 18.75 | 2.0 |
| 15.0 | 2.5 |
| 12.5 | 3.0 |
| 10.7 | 3.5 |
| 9.375 | 4.0 |
| 8.3 | 4.5 |
| 7.5 | 5.0 |
| 6.82 | 5.5 |
| 6.25 | 6.0 |

Calculate the maximum capacitive load (C_{MAX}) value that can be connected to OUT using the following formula:

$$C_{MAX}(mF) = I_{LIM}(A) \left[\frac{M \times t_{STI}(ms) + t_{STO}(ms)}{V_{IN_MAX}(V)} \right]$$

where M is the multiplier (1x/1.5x/2x) applied to the current limit during startup. For example, when using MAX14691, if $V_{IN_MAX} = 30V$, $t_{STO}(\min) = 1090ms$, $t_{STI}(\min) = 22ms$, and $I_{LIM} = 3A$, C_{MAX} results in the theoretical maximum of 111mF. In this case, any capacitance larger than 111mF will cause a fault condition because the capacitor cannot be charged to a sufficient voltage before t_{STO} has expired. In practical applications, the output capacitor size is limited by the thermal performance of the PCB. Poor thermal design can cause the thermal-foldback current-limiting function of the device to kick in too early, which may further limit the maximum capacitance that can be charged. Therefore, good thermal PCB design is imperative to charge large capacitor banks.

OUT Freewheeling Diode for Inductive Hard Short to Ground

In applications with a highly inductive load, a freewheeling diode is required between the OUT terminal and GND. This protects the device from inductive kickback that occurs during short-to-ground events.

PCB Layout Recommendations

To optimize the switch response to output short-circuit conditions, it is important to reduce the effect of undesirable parasitic inductance by keeping all traces as short as possible. Place input and output capacitors as close as possible to the device (no more than 5mm). IN and OUT must be connected with wide short traces to the power bus. During steady-state operation, the power dissipation is typically low and the package temperature change is usually minimal.

PCB layout designs need to meet two challenges: high-current input and output paths and important heat dissipation.

Heat Dissipation

Maxim recommends the use of 2oz copper on FR4 isolator in a four-layer configuration.

The layer stack needs to be Top (routing), GND (plane), Power (plane, connected to V_{OUT}) and Bottom (routing), in this order, from top to bottom.

Install the IC on an exposed pad landing of minimum 100 x 100 mils, with at least five through vias to the GND

plane. The vias should be 32mils in diameter, with a 16mils plated hole. The hole plating needs to be at least 0.5oz copper.

Provide a minimum of 1in x 1in area of copper plane on all four layers. It is important to remember that the inner planes do not contribute much to heat dissipation, due to FR4 isolation, but are important from an electrical point of view.

If possible, keep the top and bottom copper areas clear of solder mask, as this will greatly improve heat dissipation.

Use a similarly large copper area connected directly to the OUT pins. A dimension of 1in x 1in is also recommended. This might look oversized for current path requirements, but is essential for heat dissipation. Keep in mind that heat is generated at the drain junction of the internal nMOS pass FET, which is then eliminated through the five OUT pins and needs to be dissipated on this same copper area.

Current Path Requirements

Connect all five IN pins to a copper area that is at least 150mils wide. Using 2oz copper may reduce this requirement to 100mils. Remember to provide the same copper trace width on the source connection, when using the external pMOS pass FET (with the drain connected to the IN pins).

Use extreme caution when placing the decoupling capacitors to the IN and OUT pins. The tendency to go as close as possible to the IC pins might interfere with the minimum requirement of the trace width above.

It is important to note that the return load current does not flow through the IC; therefore, it is important to provide an external ground trace of at least the same width as the input/output one.

Maxim recommends the use of a GND plane. Connect the input and output grounds to this plane using at least four plated vias each. The vias should be 84mils in diameter (or 60mils x 60mils, if square), with a 35mils plated hole.

Additional Information

For more information on heat dissipation, see the *IC Application Section* on <http://www.maximintegrated.com>.

ESD Test Conditions

The devices are specified for ±15kV (HBM) ESD on IN when IN is bypassed to ground with a 1µF, low ESR ceramic capacitor. No capacitor is required for ±2kV (HBM) (typ) ESD on IN. All pins have ±2kV (HBM) ESD protection.

HBM ESD Protection

Figure 6 shows the Human Body Model and Figure 7 shows the current waveform it generates when discharged into low impedance. This model consists of a 100pF capacitor charged to the ESD voltage of interest, which is then discharged into the device through a 1.5kΩ resistor.

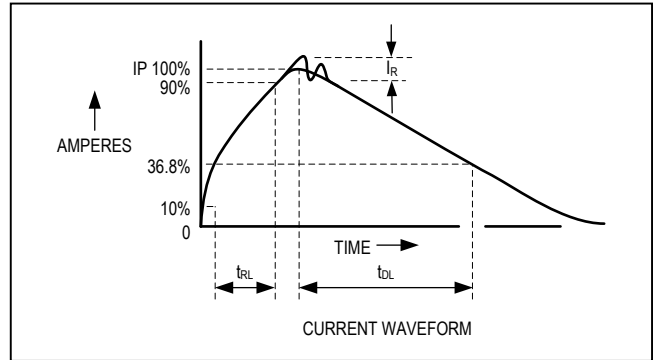


Figure 7. Human Body Current Waveform


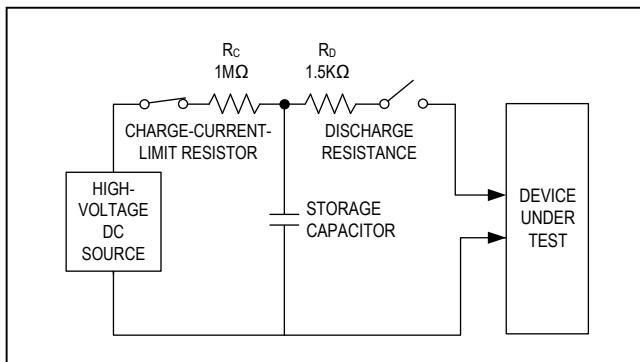


Figure 6. Human Body ESD Test Model

Typical Application Circuit

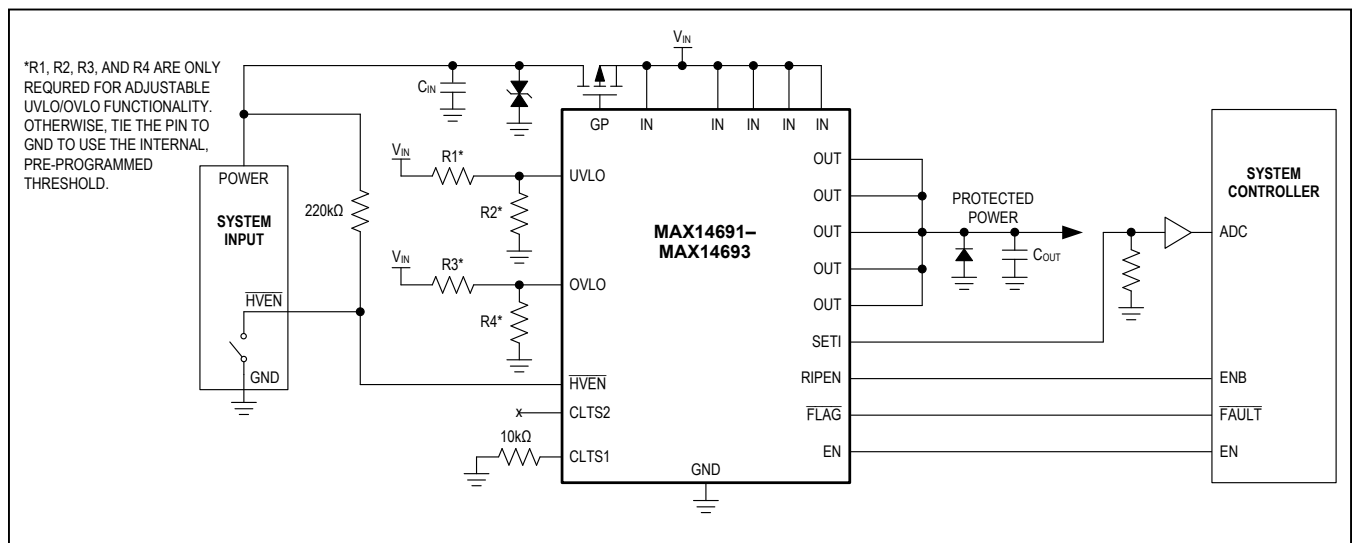

Ordering Information

| PART | INITIAL CURRENT LIMIT | TEMP RANGE | PIN-PACKAGE |
|---------------|-----------------------|-----------------|-------------|
| MAX14691ATP+T | 1.0x | -40°C to +125°C | 20 TQFN-EP* |
| MAX14692ATP+T | 1.5x | -40°C to +125°C | 20 TQFN-EP* |
| MAX14693ATP+T | 2.0x | -40°C to +125°C | 20 TQFN-EP* |

+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.

*EP = Exposed pad.

Chip Information

PROCESS: BiCMOS

Package Information

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO. | LAND PATTERN NO. |
|--------------|--------------|-------------------------|-------------------------|
| 20 TQFN-EP | T2055+5C | 21-0140 | 90-0010 |

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|---|---------------|
| 0 | 5/14 | Initial release | — |
| 1 | 8/14 | Removed future product references for MAX14692 and MAX14693, updated front page, and replaced <i>Layout and Thermal Dissipation</i> section | 1, 16, 18 |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com