
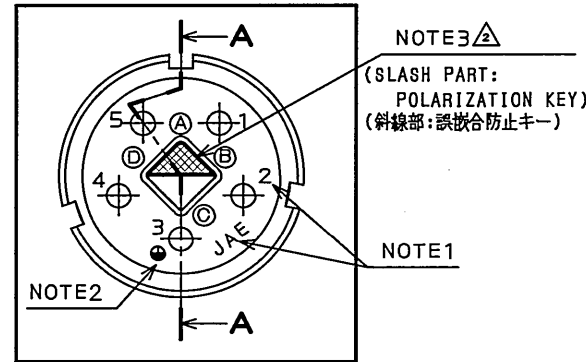
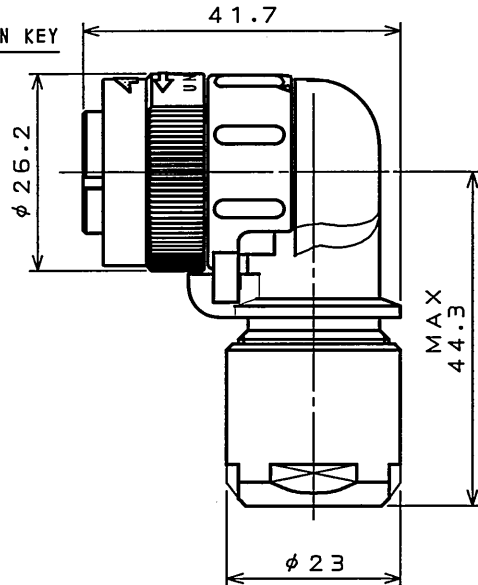
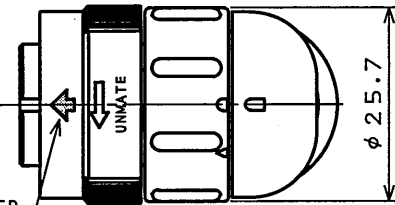


DOF-0-212F(05.08)


7Z6Z01PS

(ON 0NIMVHD)台裏図

WHITE MARKING AS INDICATED
白マーキング表示

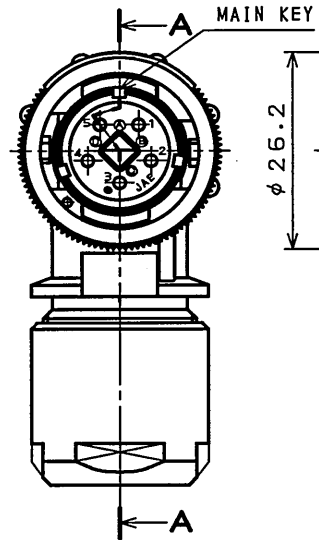

INSERT ARRANGEMENT (SCALE 2:1)
インサート配列図(尺度 2:1)

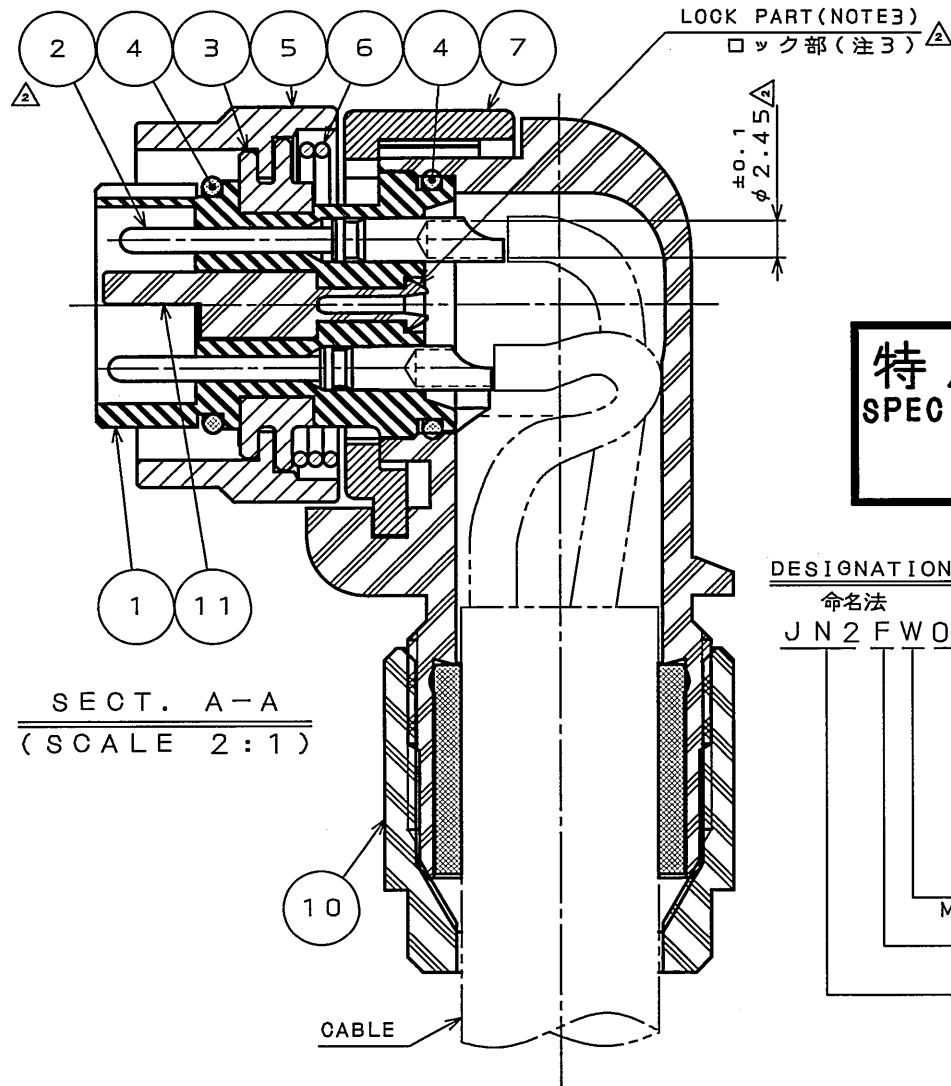

SECT. A-A
(SCALE 2:1)

特別管理品目
SPECIAL CONTROL ITEM
T U V

DESIGNATION

命名法
J N 2 F W 0 5 M H ※

MODIFICATION NUMBER (NOTE4)
モディファイ番号(注4)
CONTACT SIZE (H: #16)
コンタクトサイズ(H: #16)
TERMINATION (M: PIN SOLDER TYPE)
結線方法(M: ピン半田結線)
NO. OF CONTACTS (5 CONTACTS)
芯数(5芯)
SHELL SIZE
シェルサイズ
MOUNTING CONFIGURATION (F: ANGLE PLUG)
接線形状(F: アングルプラグ)
SERIES
シリーズ

SPECIFICATION			
NUMBER OF CONTACT	: 5X#16	POLLUTION DEGREE/2,	
RATED VOLTAGE	: 400VAC	OVER VOLTAGE CATEGORY/II	
RATED CURRENT	: 13A MAX. per CONTACT		
DIELECTRIC WITHSTANDING VOLTAGE	: 2000VAC		
INSULATION RESISTANCE	: 1000MΩ MIN. (AT 500VDC)		
APPLICABLE CABLE	: AWG#14 MAX (SEE NOTE4)		
SUBMERSIBLE PROPERTY	: IP67 (MATED)		


仕様			
コンタクト	: #16コンタクト 5本		
定格電圧	: 400VAC (汚染度: 2 / 過電圧耐量: II)		
定格電流	: 13A以下/1芯		
耐電圧	: 2000VAC		
絶縁抵抗	: 1000MΩ以上(500VDCにて)		
適用ケーブル	: AWG#14以下(注4)		
防汚性能	: IP67(嵌合時)		

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
2	3.Dec.2007	064487	REVISED NOTE OTHERS		T.SUZUKI	T.OKAMURA	E.MATSUMOTO
3	31.Jul.2008	065833	ADDED ITEM		T.SUZUKI	T.OKAMURA	E.MATSUMOTO

- NOTE1. CONTACT POSITION NUMBER & COMPANY LOGO "JAE" ARE MARKED AS INDICATED.
2. EARTH MARK (⊕) IS MARKED AS INDICATED.
- △3. POLARIZATION KEY IS BUILT INTO THE POSITION ⊙ FOR ANOTHER POSITION (⊙~⊙), THE LOCK PART IS PICKED UP AND DETACHED WITH TWEEZERS. POLARIZATION KEY IS BUILT AGAIN.
4. THE PART NUMBER SHALL BUSHING AND THE APPLICABLE CABLE SIZE. SEE TABLE-1 FOR RESPECTIVE PART NUMBERS, THEIR APPLICABLE CABLES, THEIR BUSHING COLORS, AND IDENTIFICATION.

- 注1. 図示の位置に端子番号及び社名を表示する。
2. 図示の位置にアースマーク(⊕)を表示する。
- △3. 誤嵌合防止キーは⊙のポジションに組み込まれている。別のポジション(⊙~⊙)にする場合は、誤嵌合防止キーのロック部をピンセットで摘み取り外し、再装着すること。
4. 本製品は品名によりブッシング部品 ⊙ 及び、適用ケーブルが異なる。品名、適用ケーブル、色相及び、識別表示は表-1による。

TABLE-1【APPLICABLE WIRE DIM.】			
PART NUMBER 品名	APPLICABLE WIRE DIM. 適用ケーブル径	BUSHING COLOR ブッシングの色相	IDENTIFICATION 識別表示
JN2FW05MH1	φ8~10	BLACK	φ10
JN2FW05MH2	φ10~12	BLACK	NONE

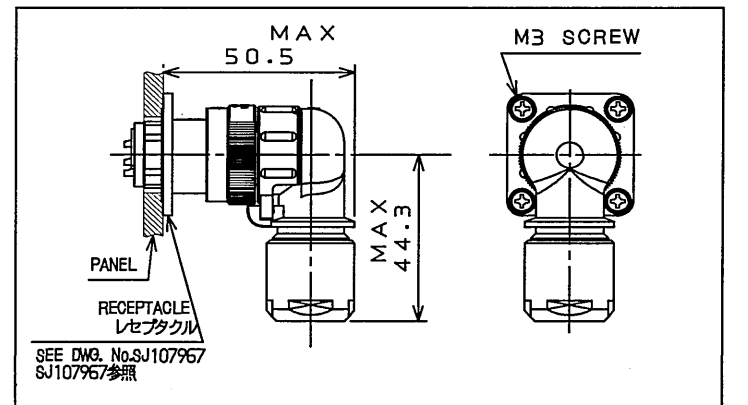

MATED CONDITION (SCALE 1:2)
嵌合状態図(尺度 1:2)

1	1	POLARIZATION KEY	1	SYNTHETIC RESIN		COLOR: WHITE, NOTE3
1	0	GLAND NUT	1	SYNTHETIC RESIN		COLOR: BLACK
9		BUSHING	1	SYNTHETIC RUBBER		NOTE4
8		ANGLE ENDBELL	1	SYNTHETIC RESIN		COLOR: BLACK
7		ASSEMBLY NUT	1	ZINC ALLOY	ZINC PLATING	COLOR: BLACK SYSTEM INTERFERENCE COLOR
6		SPRING	1	STAINLESS STEEL		
5		COUPLING NUT	1	ZINC ALLOY	ZINC PLATING	COLOR: BLACK SYSTEM INTERFERENCE COLOR
4		"O" RING	2	SYNTHETIC RUBBER		
3		FLANGE	1	ZINC ALLOY	ZINC PLATING	COLOR: BLACK SYSTEM INTERFERENCE COLOR
2		PIN CONTACT	5	COPPER ALLOY	SILVER PLATING	
1		INSULATOR	1	SYNTHETIC RESIN		COLOR: BLACK

符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
1	POLARIZATION KEY	1	SYNTHETIC RESIN		COLOR: WHITE, NOTE3
1	GLAND NUT	1	SYNTHETIC RESIN		COLOR: BLACK
9	BUSHING	1	SYNTHETIC RUBBER		NOTE4
8	ANGLE ENDBELL	1	SYNTHETIC RESIN		COLOR: BLACK
7	ASSEMBLY NUT	1	ZINC ALLOY	ZINC PLATING	COLOR: BLACK SYSTEM INTERFERENCE COLOR
6	SPRING	1	STAINLESS STEEL		
5	COUPLING NUT	1	ZINC ALLOY	ZINC PLATING	COLOR: BLACK SYSTEM INTERFERENCE COLOR
4	"O" RING	2	SYNTHETIC RUBBER		
3	FLANGE	1	ZINC ALLOY	ZINC PLATING	COLOR: BLACK SYSTEM INTERFERENCE COLOR
2	PIN CONTACT	5	COPPER ALLOY	SILVER PLATING	
1	INSULATOR	1	SYNTHETIC RESIN		COLOR: BLACK

仕様書 (SPECIFICATION)	第1版 (ORIGINAL DATE)	尺度 (SCALE)	シリーズ (SERIES)
JAC8-5119-4 (Product specifications)	12.Oct.2007	1: 1	JN2
JABL-5119 (A product instruction manual)			
公差 (GENERAL TOLERANCE)			
寸法 (DIMENSION)	角度 (ANGLES)		
. ±0.8	° ±		
.X ±0.4	°X ±		
.XX ±0.1			
.XXX ±			

製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
	T.SUZUKI	T.OKAMURA	E.MATSUMOTO

名称 (TITLE)	質量 (MASS)
JN2FW05MH※ (ANGLE PLUG) (アングルプラグ)	

図面番号 (DRAWING NO.)	版数 (REV.)
SJ107972	3

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com