
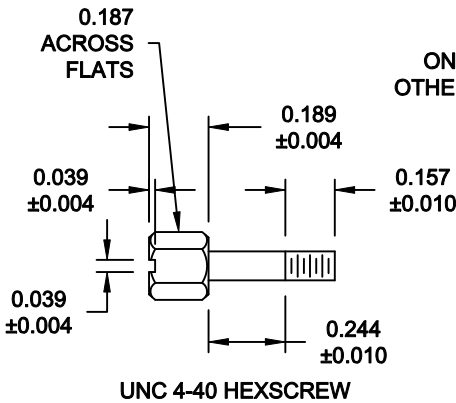
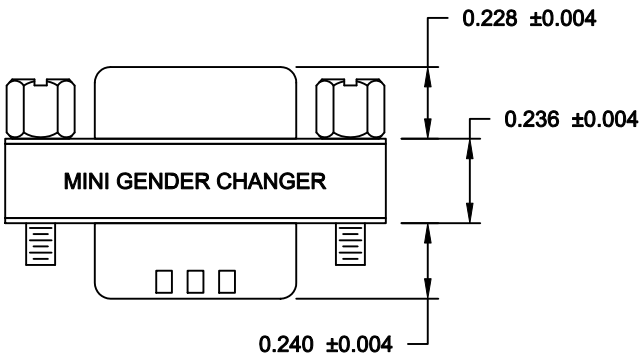


SPECIFICATION:


INSULATOR: PBT GLASS FIBER REINFORCED
UL 94VO
CONTACT: BRASS
CONTACT PLATING: GOLD PLATED OVER NICKEL
SHELL: TIN PLATED SHELL
CURRENT RATING: 3 AMP
DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
INSULATION RESISTANCE: 1,000 MegOHMS MIN @500 VDC
TEMPERATURE: -55° C - +105° C

NOTE:

LABEL: YELLOW COLOR WITH
BLACK CHARACTORS
ONE SIDE: MINI GENDER CHANGER
OTHER SIDE: U.S.A. PATENT 5199906

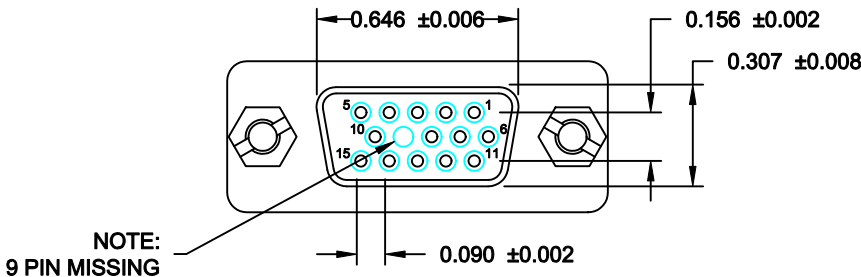

15-PIN MALE		15-PIN FEMALE
1	---	1
2	---	2
3	---	3
	~	
9	NO CONNECTION	9
	~	
14	---	14
15	---	15
SHELL	---	SHELL
PIN OUT		

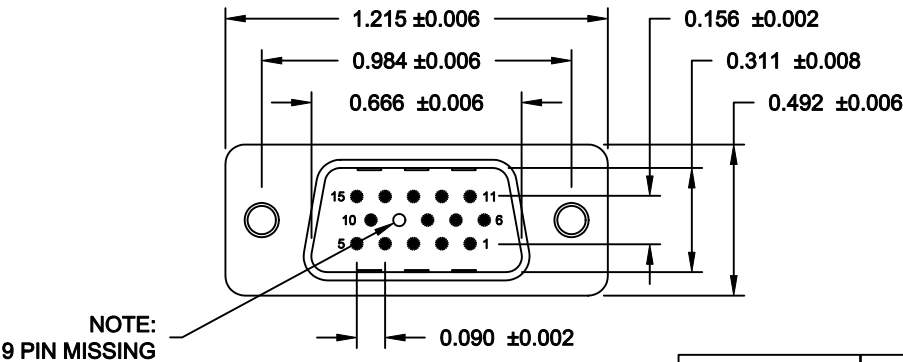

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN: C. SMITH		DATE: 10-12-07	
CHECKED:		DATE:	
SCALE: 1.5 : 1	SHEET 1	OF 1	REV 3
DWG NO. GCHDLP15M15F			

RoHS COMPLIANT

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com