
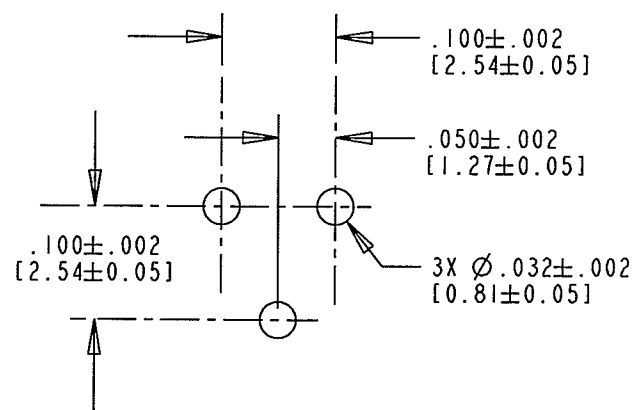
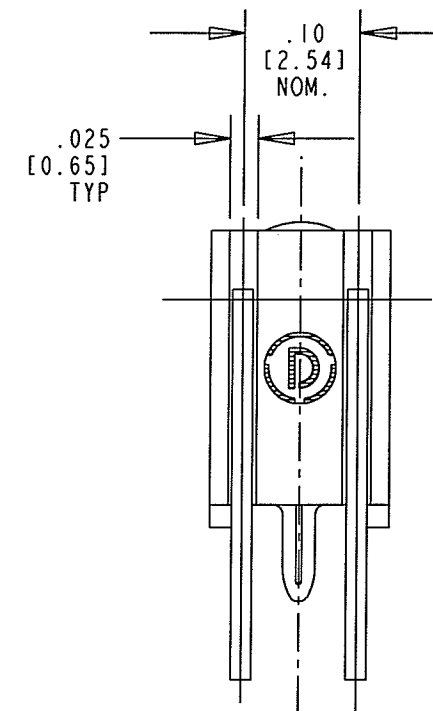
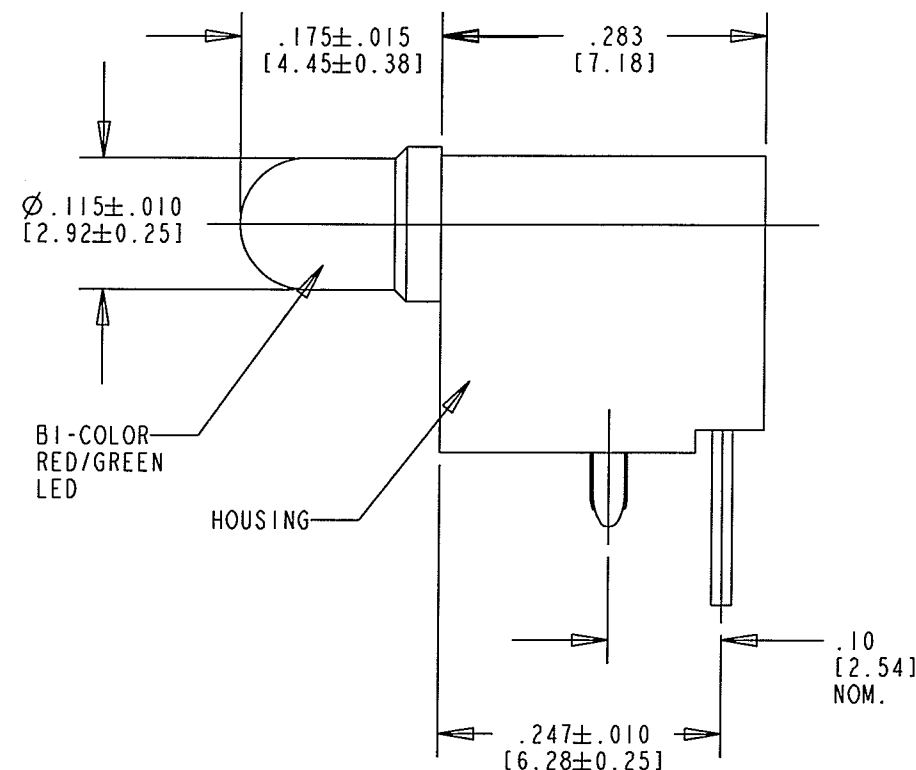


REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A		NEW RELEASE	SM	N.O.	MES	4-17-07
B		".134±.010" WAS ".134".	KLJ			3-18-08

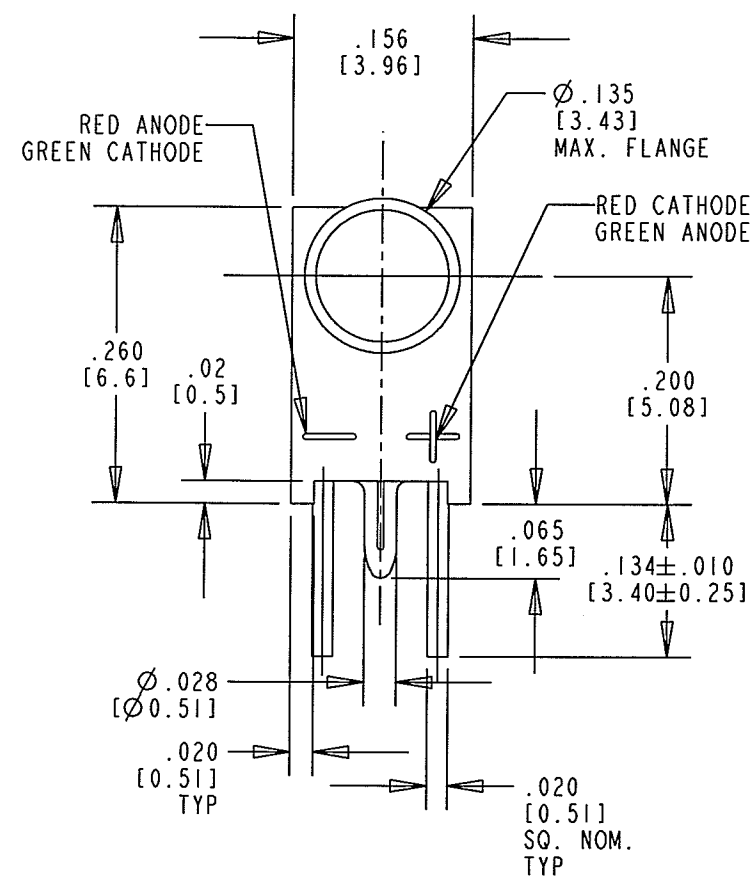

RECOMMENDED
HOLE PATTERN

ABSOLUTE MAXIMUM RATINGS AT 25°C AMBIENT							
POWER DISSIPATION				100 mW			
DERATE LINEARLY FROM 50°C				.40 mA/°C			
CONTINUOUS FORWARD CURRENT				30 mA			
PEAK FORWARD CURRENT (10 ms PULSE WIDTH, 1/10 DUTY)				120 mA			
PEAK REVERSE VOLTAGE				5 V			
LEAD SOLDERING TEMPERATURE, 6 SEC., 1/16" FROM BASE				260° C			
OPERATING TEMPERATURE				-55° C TO +100° C			
STORAGE TEMPERATURE				-55° C TO +100° C			

NOTES:

1. LEADS TO FIT INTO HOLES SPACED AS PER HOLE PATTERN.
2. LED LEAD SPACING DIMENSION IS MEASURED AT HOUSING EXIT.
3. DIALIGHT PART NUMBER: 551-3011F.
4. THIS ASSEMBLY CONTAINS ELECTROSTATIC DISCHARGE SENSITIVE DEVICES (ESDS). MAINTAIN ALL PRECAUTIONARY MEASURES DURING ASSEMBLY, HANDLING AND STORAGE IN ACCORDANCE WITH IPC-A-610.

RoHS Compliant 551-3011F Thru hole CBI with Pin

Part Numbers with the "F" suffix ending are RoHS Compliant.
The bag packaging is marked with "RoHS Compliant" label or equivalent markings.
Parts can be wave soldered, dip soldered or hand soldered using typical lead-free soldering process with max 260°C temp. for 5 sec.

PART NUMBER	COLOR	PEAK WAVELENGTH (nm)	VIEWING ANGLE (°) 2 & 1/2	LUMINOUS INTENSITY (mcd) @ I _f = 10mA; 25°C		FORWARD VOLTAGE (V) @ I _f = 20mA; 25°C		REVERSE CURRENT (μA); 25°C
				MIN	TYP	TYP	MAX	
551-3011F	RED	100	60	2.5	4.7	2.0	2.8	100
	GREEN			3.7	10.0	2.1		



ATTENTION:
OBSERVE PRECAUTIONS FOR
HANDLING ELECTROSTATIC
SENSITIVE DEVICES

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE: DRAWING SCALE	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)	C-17487	B
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE 3 mm CBI, .200 C, R/G, BI-COLOR, RoHS COMPLIANT	
FRACTIONS: ±1/64 DECIMALS (.XX): ±.01 DECIMALS (.XXX): ±.005 DECIMALS (.XXXX): ±.0005 ANGLES: ±1°	MATERIAL	
FINISH:	Dialight	1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727
FSCM 83330	SHEET 1 OF 1 FAMILY TABLE:	

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com