



a;0;RL

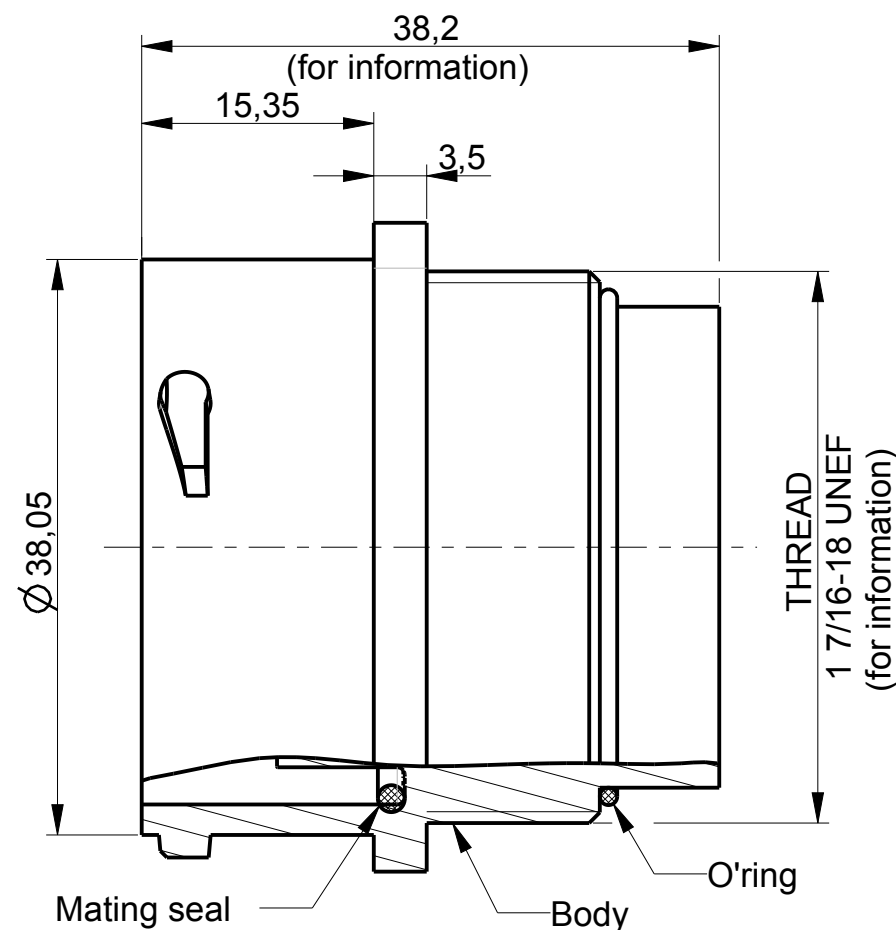

COUPE C-C

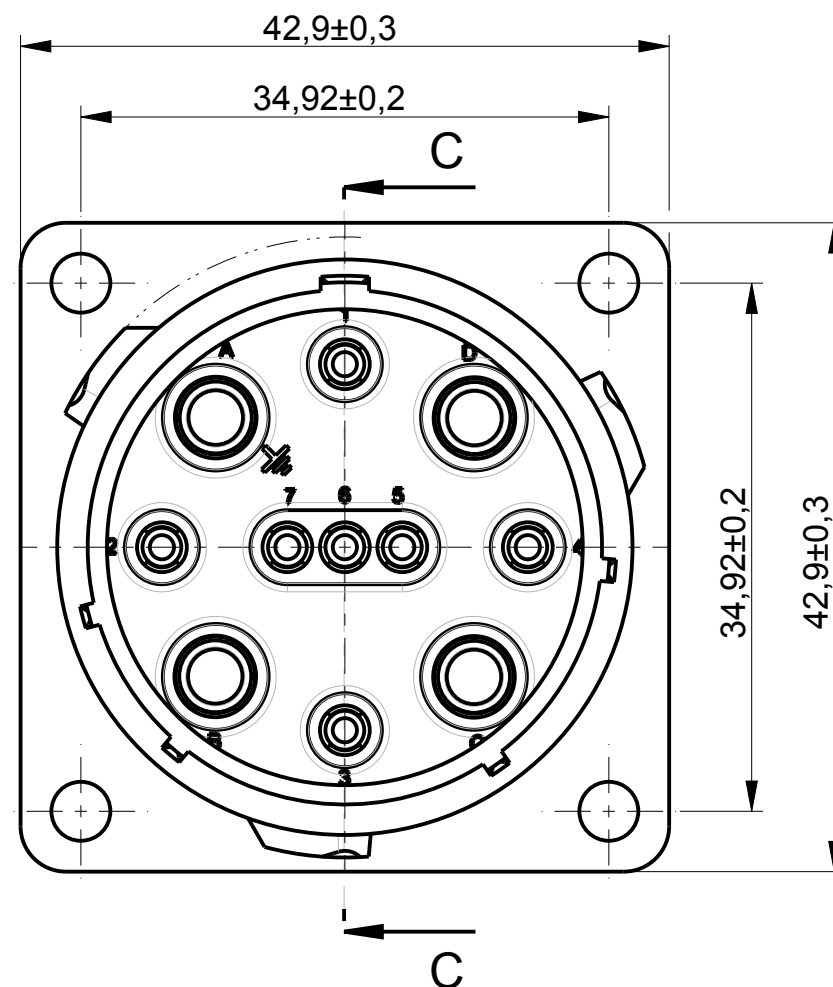

MATERIAL:



- Body :Thermoplastic black PBT GF30
- Mating seal :silicon
- O'ring: NBR

PERFORMANCE CHARACTERISTICS:

- Operating temperature : -30° up to +85°
- Test potential: 800 V
- Insulation resistance : 5 Gohms under 500V
- Operating voltage : 28V (for #8) and 24V (for #16)
- Rated current : 26A (for #8) et 13A (for #16)
- Contact resistance : <5 mohms by contact (for #8) and <6 mohms (for #16)
- Durability:100 matings and unmatings
- Level sealing : IP69K (mated connector only)
- Salt spray : 500H


NOTES :

- Contact are delivered separately

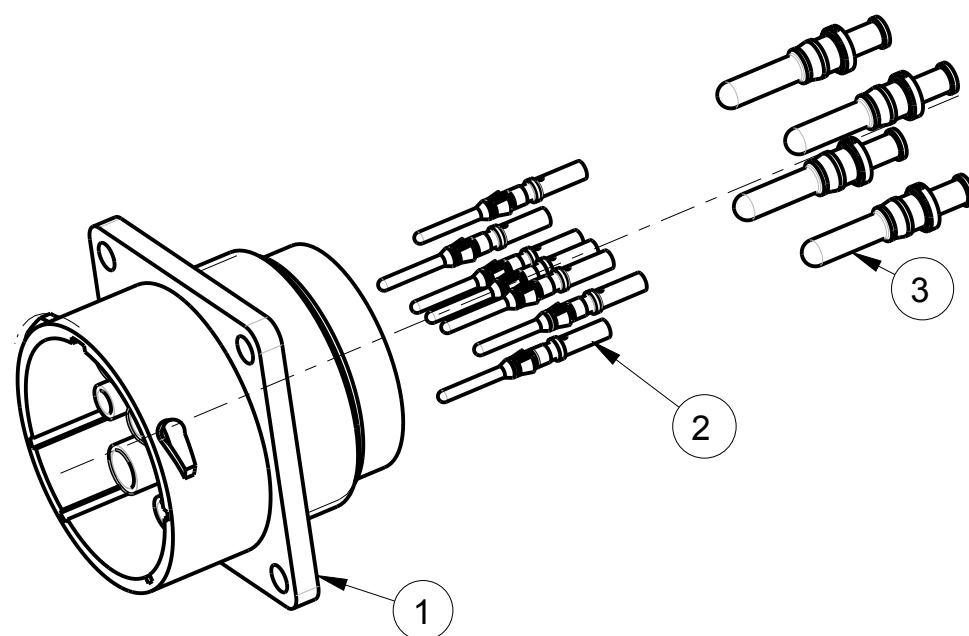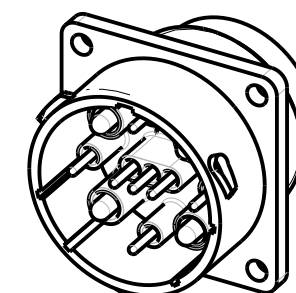

P/N : WME10003A

REP	P/N	DESCRIPTION	COMMENTS	QTY
1	WME10003A	Male receptacle size 24	Contact delivered separately	1
2	RM16M23K	PIN #16	Delivered separately	7
3	82913603A	PIN #8	Delivered separately	4

a	09/07/14	New drawing		23017SPR
ISS	DATE	Latest modification - by: --		MOD N°
Designed by:		J.FEURPRIER Date:09/07/14	CUSTOMER DRAWING	
TITLE		MALE RECEPTACLE SIZE 24-11 WME CONNECTOR		
Scale		General linear Tolerances: ± 0.2	NPRDS / PROJECT IC131707A	
1/1				
SOURIAU		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT	SOURIAU DRG N° WME1-0003A-C01			SHEET 1 / 1
A3				

NOT EXPORT CONTROLLED

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com