
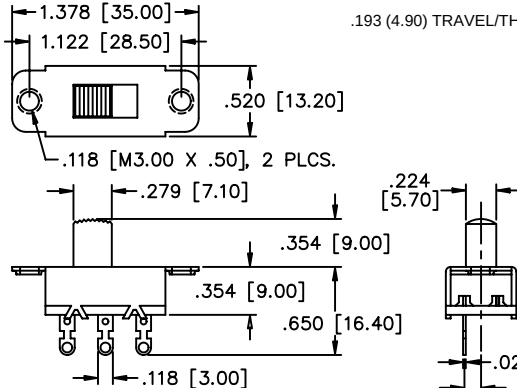


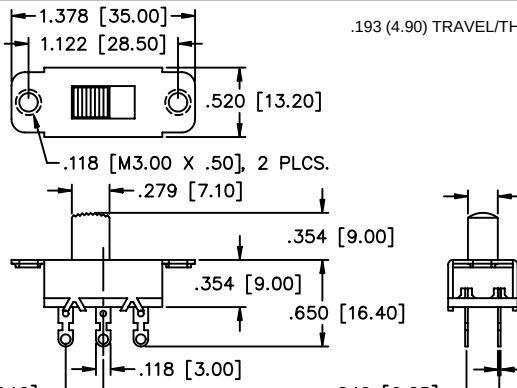


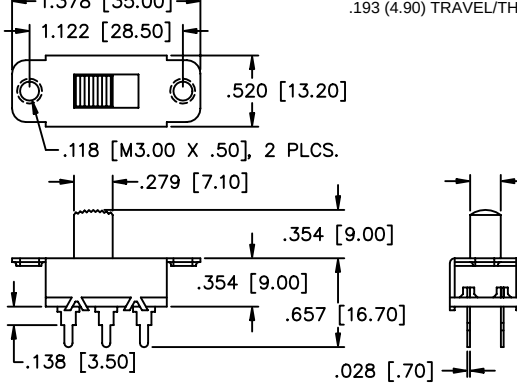



# PM Series

## Standard Size Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

| SPECIFICATIONS                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | FEATURES                                                                                                                                                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Contact rating:</b> 6 Amps at 125 VAC, 3 Amps at 250 VAC<br><b>Initial contact resistance:</b> 30 milliohms max.<br><b>Insulation resistance:</b> 100 megohms min. at 500 VDC<br><b>Dielectric strength:</b> 1000 VAC for 1 minute (min.)<br><b>Electrical life:</b> 10,000 cycles min.<br><b>Operating temperature range:</b> -20°C to +60°C<br><b>Actuation force:</b> 500g ± 200g<br><b>Solder heat resistance:</b> 260°C max. for 3 seconds<br><b>Solvent washing permissible</b> | <ul style="list-style-type: none"> <li>Wash-through open frame construction.</li> <li>UL &amp; CSA recognized.</li> <li>Threaded mounting holes standard - M3X0.5.</li> <li>Panel mounting.</li> </ul> |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | MATERIALS                                                                                                                                                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Contacts:</b> Silver plated phosphor bronze<br><b>Terminals:</b> Tin plated brass<br><b>Base:</b> Phenolic laminated sheet<br><b>Actuator:</b> Nylon, type 6/6<br><b>Frame:</b> Zinc plated steel   |

|                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MODEL NO.</b><br><b>PM13B012</b>  | <p><b>1P2T</b></p>  <p>  <br/>       ● = COMMON     </p> <p>  <br/>       SCHEMATIC      MECHANICAL OUTLINE     </p> <p>  <br/>       PANEL CUTOUT     </p>           |
| <b>MODEL NO.</b><br><b>PM13B022</b>  | <p><b>2P2T</b></p>  <p>  <br/>       ● = COMMON     </p> <p>  <br/>       SCHEMATIC      MECHANICAL OUTLINE     </p> <p>  <br/>       P. C. BOARD LAYOUT     </p> |
| <b>MODEL NO.</b><br><b>PM13B022P</b> | <p><b>2P2T</b></p>  <p>  <br/>       ● = COMMON     </p> <p>  <br/>       SCHEMATIC      MECHANICAL OUTLINE     </p> <p>  <br/>       PANEL CUTOUT     </p>       |

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct    +86 (21) 6401-6692  
Email     amall@ameya360.com  
QQ        800077892  
Skype     ameyasales1 ameyasales2

➤ Customer Service :

Email     service@ameya360.com

➤ Partnership :

Tel        +86 (21) 64016692-8333  
Email     mkt@ameya360.com