

■ FEATURES

HFI chip inductors are Jaro's line of high frequency ceramic chip inductors. We have developed highly reliable and versatile chip inductors that will meet your high frequency design requirements.

• High Frequency Range

HFI chip inductors have a ceramic material construction that extends the effective frequency range to 10GHz.

• Multiple Size Availability

HFI chip inductors are available in three compact sizes: 060303, 100505, 160808 and 201209.

• High Q characteristics

H-series HFI chip inductors exhibit higher Q at high frequency.

■ APPLICATIONS

HFI chip inductors can be used in a variety of electronics including:

- Cellular Phones
- Pager
- High-Speed Communication Devices
- WALN and RF module

■ PRODUCT IDENTIFICATION

1 2 3 4 5 6
HFI - 160808 - 1N2 S □ □ -P

Product Code

Dimensions (in mm)

Inductance Code


Tolerance Code

Pattern Code

RoHS Code

Code	Tolerance
G	$\pm 2\%$
J	$\pm 5\%$
K	$\pm 10\%$
C	$\pm 0.2\text{nH}$
S	$\pm 0.3\text{nH}$

■ PRODUCT DIMENSIONS

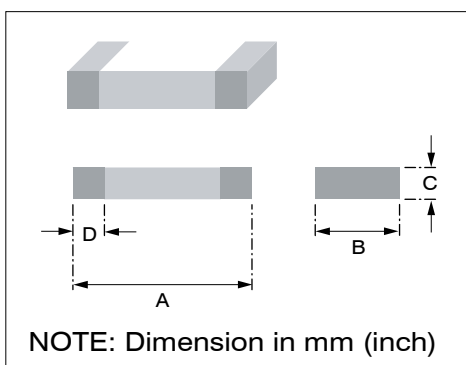

PRODUCT NO.	A	B	C	D
HFI-201209 (0805)	2.0 ± 0.20 (0.079 ± 0.008)	1.2 ± 0.20 (0.047 ± 0.008)	0.9 ± 0.20 (0.035 ± 0.008)	0.5 ± 0.30 (0.020 ± 0.012)
HFI-160808 (0603)	1.6 ± 0.15 (0.063 ± 0.006)	0.8 ± 0.15 (0.031 ± 0.006)	0.8 ± 0.15 (0.031 ± 0.006)	0.3 ± 0.20 (0.012 ± 0.008)
HFI-100505 (0402)	1.0 ± 0.10 (0.039 ± 0.004)	0.5 ± 0.10 (0.020 ± 0.004)	0.5 ± 0.10 (0.020 ± 0.004)	0.25 ± 0.10 (0.010 ± 0.004)
HFI-060303 (0201)	0.6 ± 0.03 (0.024 ± 0.001)	0.33max. (0.012max.)	0.33max. (0.012max.)	0.15 ± 0.05 (0.006 ± 0.002)


■ PRODUCT SPECIFICATIONS

PART NUMBER	Inductance (nH) at 100 MHz	Tolerance	Q Min.	Q Typical			S.R.F.(MHz) Min.	R _{DC} (Ω) Max.	Rated Current (mA) Max.
			100 MHz	100 MHz	500 MHz	800 MHz			
HFI-060303-0N3□	0.3	C	4	5	13	18	10000	0.07	250
HFI-060303-0N4□	0.4	C	4	5	13	18	10000	0.07	250
HFI-060303-0N5□	0.5	C	4	5	13	18	10000	0.08	250
HFI-060303-0N6□	0.6	C	4	5	13	18	10000	0.08	250
HFI-060303-0N7□	0.7	C	4	5	13	18	10000	0.09	250
HFI-060303-0N8□	0.8	C	4	5	13	18	10000	0.10	250
HFI-060303-0N9□	0.9	C	4	5	13	18	10000	0.10	250
HFI-060303-1N0□	1.0	C,S	4	5	15	19	10000	0.14	250
HFI-060303-1N1□	1.1	C,S	4	6	15	20	10000	0.14	250
HFI-060303-1N2□	1.2	C,S	4	6	15	20	10000	0.14	250
HFI-060303-1N3□	1.3	C,S	4	6	15	20	10000	0.14	250
HFI-060303-1N5□	1.5	C,S	4	6	15	20	10000	0.18	230
HFI-060303-1N6□	1.6	C,S	4	6	15	20	10000	0.18	230
HFI-060303-1N8□	1.8	C,S	4	6	15	20	10000	0.19	200
HFI-060303-2N0□	2.0	C,S	4	6	15	20	8800	0.20	200
HFI-060303-2N2□	2.2	C,S	4	6	15	20	8800	0.22	200
HFI-060303-2N4□	2.4	C,S	4	6	15	20	8300	0.24	200
HFI-060303-2N7□	2.7	C,S	5	6	16	20	7700	0.25	200
HFI-060303-3N0□	3.0	C,S	5	6	16	20	7200	0.28	180
HFI-060303-3N3□	3.3	C,S,K	5	6	16	20	6700	0.30	180
HFI-060303-3N6□	3.6	C,S,K	5	6	16	20	6400	0.30	170
HFI-060303-3N9□	3.9	C,S,K	5	7	16	20	6000	0.30	170
HFI-060303-4N3□	4.3	C,S,K	5	7	16	20	5700	0.40	150
HFI-060303-4N7□	4.7	C,S,K	5	7	16	20	5300	0.40	150
HFI-060303-5N1□	5.1	C,S,K	5	7	16	20	5000	0.40	150
HFI-060303-5N6□	5.6	C,S,K	5	7	16	20	4200	0.40	150
HFI-060303-6N2□	6.2	G,J,K	5	7	16	20	3800	0.44	150
HFI-060303-6N8□	6.8	G,J,K	5	7	16	20	3500	0.50	150
HFI-060303-7N5□	7.5	G,J,K	5	7	15	20	3300	0.53	150
HFI-060303-8N2□	8.2	G,J,K	5	7	15	20	3200	0.55	150
HFI-060303-9N1□	9.1	G,J,K	5	6	15	20	3000	0.62	150
HFI-060303-10N□	10	G,J,K	5	7	15	19	2800	0.65	150
HFI-060303-12N□	12	G,J,K	5	7	14	18	2400	0.70	100
HFI-060303-15N□	15	G,J,K	5	7	14	18	2200	0.80	100
HFI-060303-18N□	18	G,J,K	5	7	14	18	2100	0.90	100

PRODUCT SPECIFICATIONS

PART NUMBER	Inductance (nH) at 100 MHz	Tolerance	Q Min.	Q Typical			S.R.F.(MHz) Min.	R _{DC} (Ω) Max.	Rated Current (mA) Max.
			100 MHz	100 MHz	500 MHz	800 MHz			
HFI-060303-22N□	2.2	G,J,K	5	7	14	18	1800	1.20	100
HFI-060303-27N□	27	G,J,K	4	6	14	16	1800	1.80	50
HFI-060303-33N□	33	G,J,K	4	6	12	14	1700	2.10	50
HFI-060303-39N□	39	G,J,K	4	6	12	14	1500	2.40	50
HFI-060303-47N□	47	G,J,K	4	6	11	13	1300	2.80	50

TYPICAL ELECTRICAL CHARACTERISTIC CURVES

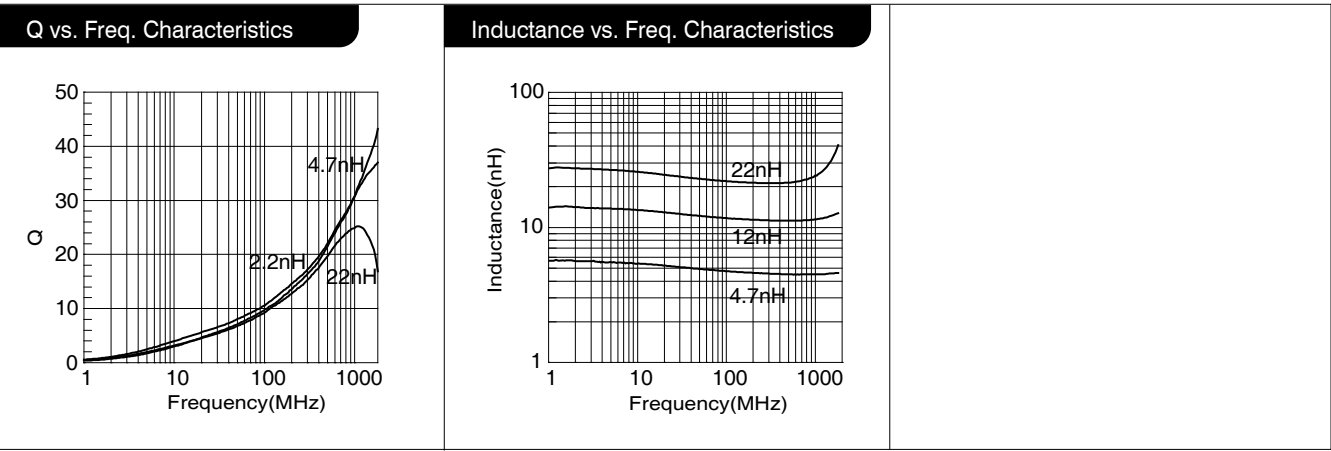


■ PRODUCT SPECIFICATIONS

PART NUMBER	INDUCTANCE (nH) AT 100 MHz	Q Min.	Q Typical	S.R.F.(MHz) Min.	R _{DC} (Ω) Max.	I _{DC} (mA) Max.		
		100MHz	800 MHz					
HFI-100505-1N0□	1.0	8	43	10000	0.12	300		
HFI-100505-1N1□	1.1				0.13			
HFI-100505-1N2□	1.2							
HFI-100505-1N3□	1.3				41		6000	0.14
HFI-100505-1N5□	1.5		0.16					
HFI-100505-1N6□	1.6							
HFI-100505-1N8□	1.8		0.17					
HFI-100505-2N0□	2.0				36			
HFI-100505-2N2□	2.2		5000	0.19				
HFI-100505-2N4□	2.4			0.22				
HFI-100505-2N7□	2.7							
HFI-100505-3N0□	3.0		37	4000	0.24			
HFI-100505-3N3□	3.3							
HFI-100505-3N6□	3.6			35	0.27			
HFI-100505-3N9□	3.9							
HFI-100505-4N3□	4.3		32	3900	0.32			
HFI-100505-4N7□	4.7							
HFI-100505-5N1□	5.1			34	0.35			
HFI-100505-5N6□	5.6							
HFI-100505-6N2□	6.2		31		0.37			
HFI-100505-6N8□	6.8							
HFI-100505-7N5□	7.5		30	0.40				
HFI-100505-8N2□	8.2							
HFI-100505-9N1□	9.1			28			0.42	
HFI-100505-10N□	10.0							
HFI-100505-12N□	12.0		26	0.50				
HFI-100505-15N□	15.0							
HFI-100505-18N□	18.0			24			0.55	
HFI-100505-22N□	22.0							
HFI-100505-27N□	27.0		23	0.65				
HFI-100505-33N□	33.0							
HFI-100505-39N□	39.0			0.80				
HFI-100505-47N□	47.0							
					0.90	200		
					1.00			
					1.20			
					1.30			

PRODUCT SPECIFICATIONS

PART NUMBER	Inductance (nH) at 100 MHz	Q Min.	Q Typical	S.R.F.(MHz) Min.	R _{DC} (Ω) Max.	Rated Current (mA) Max.
		100 MHz	800 MHz			
HFI-100505-56N□	56.0	8	21	750	1.40	200
HFI-100505-68N□	68.0		19			180
HFI-100505-82N□	82.0		16	600	1.60	150
HFI-100505-R10□	100.0		-			100
HFI-100505-R12□	120.0		-			

TYPICAL ELECTRICAL CHARACTERISTIC CURVES

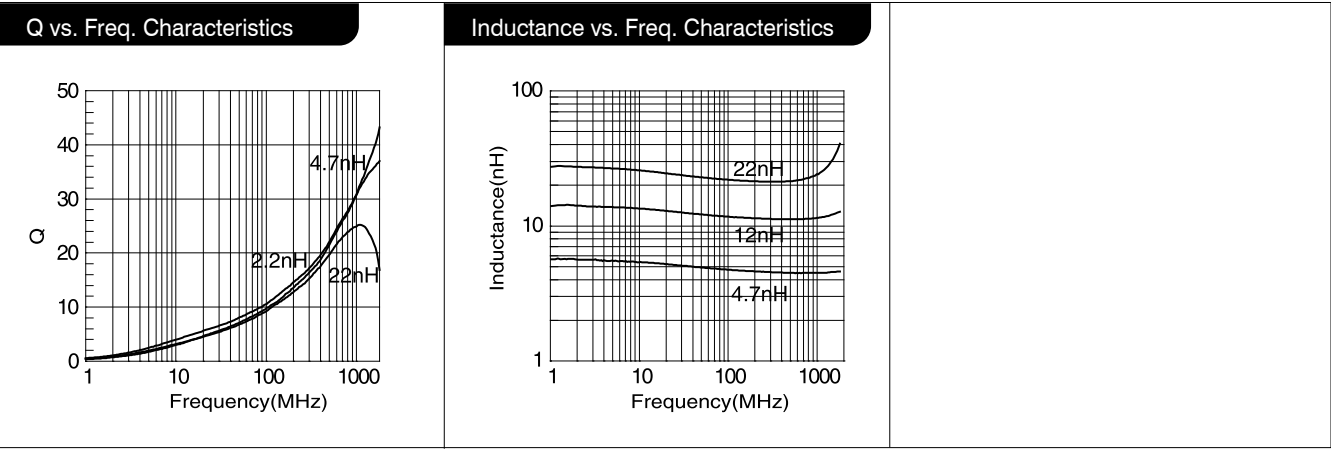


■ PRODUCT SPECIFICATIONS


PART NUMBER	INDUCTANCE (nH) AT 100 MHz	Q Min.	Q Typical	S.R.F.(MHz) Min.	R _{DC} (Ω) Max.	I _{DC} (mA) Max.		
		100MHz	800 MHz					
HFI-160808-1N0□	1.0	8	47	6000	0.10	1000		
HFI-160808-1N2□	1.2							
HFI-160808-1N5□	1.5							
HFI-160808-1N8□	1.8							
HFI-160808-2N2□	2.2	10	49		4000		0.13	600
HFI-160808-2N7□	2.7		48					
HFI-160808-3N3□	3.3		51					
HFI-160808-3N9□	3.9		48					
HFI-160808-4N7□	4.7		12	46	3500	0.20	500	
HFI-160808-5N6□	5.6			48				
HFI-160808-6N8□	6.8			50				
HFI-160808-8N2□	8.2			47				
HFI-160808-10N□	10.0	49		2600	0.25	400		
HFI-160808-12N□	12.0	47						
HFI-160808-15N□	15.0	46						
HFI-160808-18N□	18.0	39						
HFI-160808-22N□	22.0	*8	37	900	0.70		300	
HFI-160808-27N□	27.0		36					
HFI-160808-33N□	33.0		29					
HFI-160808-39N□	39.0		16					
HFI-160808-47N□	47.0		500	17	1.20	300		
HFI-160808-56N□	56.0			-				
HFI-160808-68N□	68.0			-				
HFI-160808-82N□	82.0			-				
HFI-160808-R10□	100.0	*8	400	1.0	1.50			
HFI-160808-R12□	120.0 at 50MHz							
HFI-160808-R15□	150.0 at 50MHz							
HFI-160808-R18□	180.0 at 50MHz							
HFI-160808-R22□	220.0 at 50MHz							
HFI-160808-R27□	270.0 at 50MHz							

■ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


Inductance vs. Freq. Characteristics

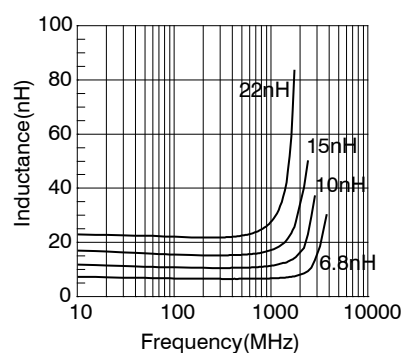

Q vs. Freq. Characteristics

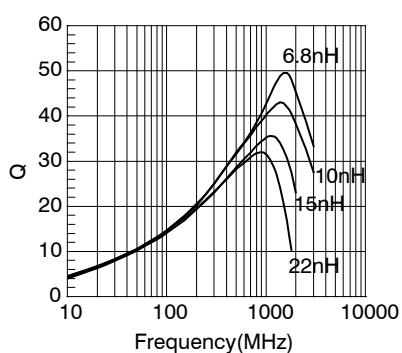

Impedance vs. Freq. Characteristics

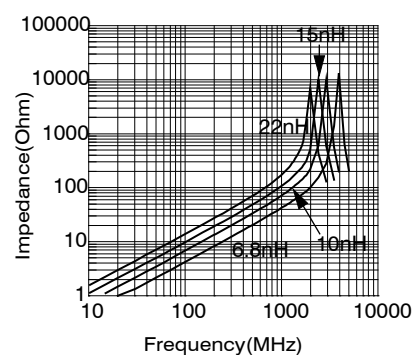


■ PRODUCT SPECIFICATIONS


PART NUMBER	INDUCTANCE (nH) AT 100 MHz	Q Min.	Q Typical	S.R.F.(MHz) Min.	R _{DC} (Ω) Max.	I _{DC} (mA) Max.	
		100MHz *50MHz	800 MHz				
HFI-201209-1N5□	1.5	10	61	4000	0.10	300	
HFI-201209-1N8□	1.8		55				
HFI-201209-2N2□	2.2		53				
HFI-201209-2N7□	2.7	12	56		3500		0.13
HFI-201209-3N3□	3.3		47				
HFI-201209-3N9□	3.9		54				0.15
HFI-201209-4N7□	4.7	15	55	3200	0.20		
HFI-201209-5N6□	5.6		60	2800	0.23		
HFI-201209-6N8□	6.8		63	2400	0.25		
HFI-201209-8N2□	8.2			2100	0.28		
HFI-201209-10N□	10.0			1900	0.30		
HFI-201209-12N□	12.0		60	1600	0.35		
HFI-201209-15N□	15.0			1500	0.40		
HFI-201209-18N□	18.0	1400		0.45			
HFI-201209-22N□	22.0	18	58	1300	0.50		
HFI-201209-27N□	27.0		55	1200	0.55		
HFI-201209-33N□	33.0		47	1000	0.60		
HFI-201209-39N□	39.0		43	900	0.65		
HFI-201209-47N□	47.0		39	800	0.70		
HFI-201209-56N□	56.0		30	700	0.75		
HFI-201209-68N□	68.0		-	600	0.80		
HFI-201209-82N□	82.0		-		0.90		
HFI-201209-R10□	100.0		*13	-	500		0.95
HFI-201209-R12□	120.0 at 50 MHz	-		1.00			
HFI-201209-R15□	150.0 at 50 MHz	-		1.10			
HFI-201209-R18□	180.0at 50 MHz	*12	-	400	1.20		
HFI-201209-R22□	220.0 at 50 MHz		-	350	1.30		
HFI-201209-R27□	270.0 at 50 MHz		-	300	1.40		
HFI-201209-R33□	330.0 at 50 MHz	*10	-	250	1.30		
HFI-201209-R39□	390.0 at 50 MHz		-		1.50		
HFI-201209-R47□	470.0 at 50 MHz		-	200			

■ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


Inductance vs. Freq. Characteristics

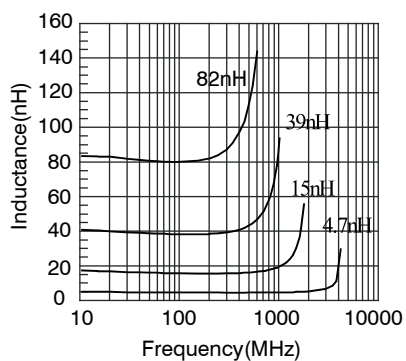

Q vs. Freq. Characteristics

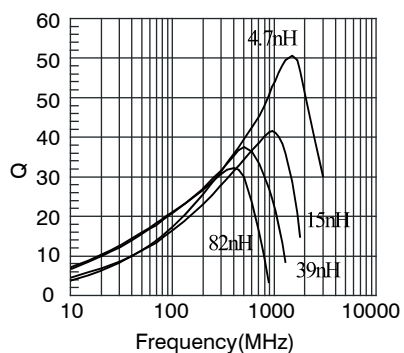

Impedance vs. Freq. Characteristics

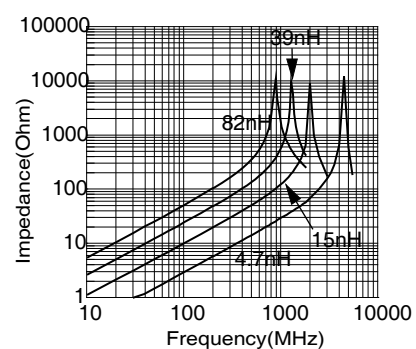

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com