

SPECIFICATIONS

Material: Boot: APM-RUBRGLAS (transparent silicone rubber) conforms to A-A-59588, Class III Grade 50.

Temperature Range: HEXSEALS: -94°F to +400°F

Pressure Range: Dust tight and splashproof.

Resistant to: Salt spray, weather, sunlight, ozone, corona and most acids.


Shelf Life: Excess of 25 years.

Operational Life: 10,000 actuations, minimum.


Notes:

1. Mounting screws are supplied in lengths shown unless otherwise specified.
2. New sizes and types of RUBRGLAS-SEELS[®] are being added regularly. Please request other types and styles as required.

Agency Recognition: Front Panel mounted Circuit Breaker Boots are UL-listed to UL Std. 50, types 1, 2, 3, 12, 12K, and 13. Back-of-Panel mounted Circuit Breaker boots are UL-listed to UL Std. 50, type 1. Also meet CSA standards.

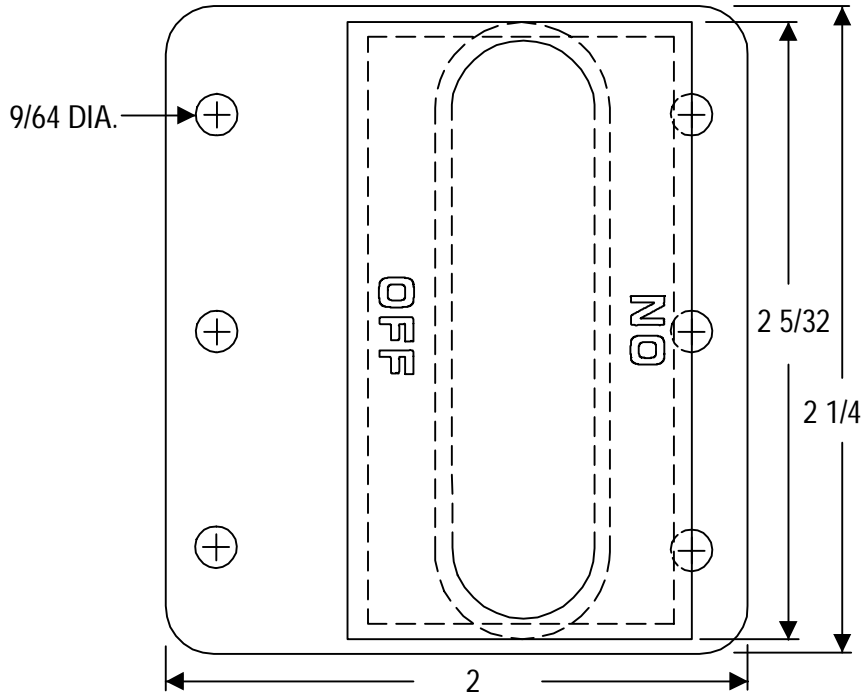

NOTE: ORDER SEPARATELY
6 # 6-32 x 3/8 APM SEELSCREWS[®]

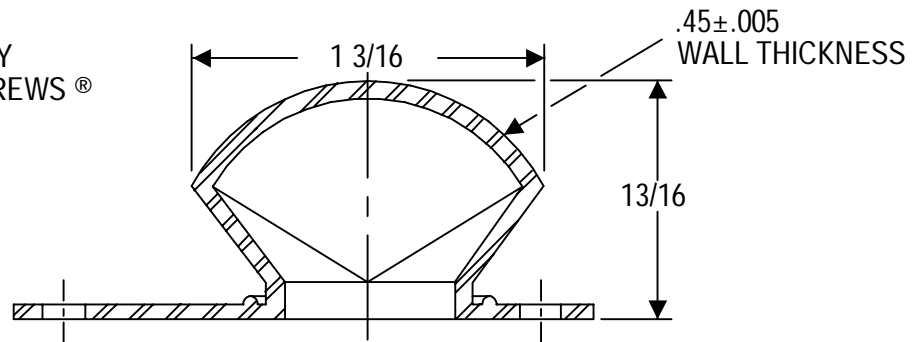

B	MAT'L CHANGED and WALL THICKNESS TOL. CHANGED FROM 0.010" to 0.005"			1-3-03	
A	CAD COMPUTER GENERATED			1-3-03	
REV.	DESCRIPTION			DATE	
MAXIMUM AND MINIMUM MEASURE- MENTS ARE STATED DIRECTLY ON EACH DIMENSION. MAT'L: APM RUBRGLASS ® CONFORMS TO A-A-59588, CL III FINISH: GRADE 50 CLEAR	TITLE:	CIRCUIT BREAKER BOOT - BACK-OF-PANEL MOUNTED	ENG.		
			DWN.	CARBONE	6-13-69
			CHKD.		
		APM-HEXSEAL CORPORATION	SCALE 3 : 2	DWG. NO. 1113/43	

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com