

MAX15118 Evaluation Kit

Evaluates: MAX15118

General Description

The MAX15118 evaluation kit (EV kit) provides a proven design to evaluate the MAX15118 high-efficiency, 18A, step-down regulator with integrated switches in a 28-bump wafer-level package (WLP). The EV kit is preset for 1.5V output at load currents up to 18A from a 2.7V to 5.5V input supply. The device features a 1MHz fixed switching frequency, which allows the EV kit to achieve an all-ceramic capacitor design and fast transient responses.

[Ordering Information](#) appears at end of data sheet.

Features

- ◆ Operates from a 2.7V to 5.5V Input Supply
- ◆ All-Ceramic Capacitor Design
- ◆ 1MHz Switching Frequency
- ◆ Output Voltage Range:
 - 0.6V Up to (0.94 x V_{IN}) Forced PWM
 - 0.6V Up to (0.85 x V_{IN}) Skip Mode
- ◆ Enable Input/Power-Good Output
- ◆ Selectable Skip-Mode Functionality
- ◆ Proven PCB Layout
- ◆ Fully Assembled and Tested

Component List

DESIGNATION	QTY	DESCRIPTION
C1–C4	4	22µF ±20%, 6.3V X5R ceramic capacitors (1206) Murata GRM31CR60J226M TDK C3216X5R0J226M
C5, C6, C25, C28	0	Not installed, ceramic capacitors (1206)
C7–C10	4	150µF ±20%, 6.3V X5R ceramic capacitors (1210) Murata GRM32RC60G157M
C11, C12	0	Not installed, ceramic capacitors (1210)
C13	1	0.47µF ±10%, 16V X7R ceramic capacitor (0603) Murata GRM188R71C474K TDK C1608X7R1A474K
C14	1	22pF ±5%, 50V C0G ceramic capacitor (0603) Murata GRM1885C1H220J TDK C1608C0G1H220J
C15	1	3300pF ±10%, 50V X7R ceramic capacitor (0603) Murata GRM188R71H332K TDK C1608C0G1H332K
C16	1	0.1µF ±10%, 50V X7R ceramic capacitor (0603) TDK C1608X7R1H104K Murata GRM188R71H104K

DESIGNATION	QTY	DESCRIPTION
C17, C23, C24, C29	0	Not installed, ceramic capacitors (0603)
C18	1	4700pF ±10%, 50V X7R ceramic capacitor (0603) Murata GRM188R71H472K TDK C1608X7R1H472K
C19, C20, C30	3	10µF ±10%, 6.3V X5R ceramic capacitors (0603) Murata GRM188R60J106K TDK C1608X5R0J106K
C21	1	2.2µF ±10%, 16V X7R ceramic capacitor (0603) Murata GRM188R61C225K TDK C1608X5R1C225K
C22, C27	2	1000µF ±20%, 10V aluminum electrolytic capacitors (10.3mm x 10.3mm) Panasonic EEEFP1A102AP
IN, OUT, PGND (x2)	4	Binding posts
JU1	1	2-pin header
JU2	1	3-pin header
L1	1	0.15µH, 24A, 3.2mΩ inductor Pulse PA0512.151NLT
OUT	4	14in ±1/2in red wire, 18G stranded (16/30)
PGND	4	14in ±1/2in black wire, 18G stranded (16/30)

MAX15118 Evaluation Kit

Evaluates: MAX15118

Component List (continued)

DESIGNATION	QTY	DESCRIPTION
Q1	0	Not installed, transistor (SOT23)
R1	1	8.06k Ω \pm 1% resistor (0603)
R2	1	5.36k Ω \pm 1% resistor (0603)
R3	1	3.83k Ω \pm 1% resistor (0603)
R4, R5	2	100k Ω \pm 5% resistors (0603)
R6	1	100 Ω \pm 5% resistor (0603)
R7	1	4.7 Ω \pm 5% resistor (0603)
R8	1	1 Ω \pm 5% resistor (0805)
R9, R11, R13	3	0 Ω resistors (0603)
R10	0	Not installed, resistor—short (PC trace) (0603)

DESIGNATION	QTY	DESCRIPTION
R12	1	10 Ω \pm 5%, resistor (0603)
R14	1	470 Ω \pm 5% resistor (0402)
U1	1	High-efficiency, 18A, synchronous buck regulator (28 WLP) Maxim MAX15118EWI+
—	2	Shunts
—	1	PCB: MAX15118 EVALUATION KIT

Component Suppliers

SUPPLIER	PHONE	WEBSITE
Murata Electronics North America, Inc.	770-436-1300	www.murata-northamerica.com
Pulse Engineering	858-674-8100	www.pulseeng.com
TDK Corp.	847-803-6100	www.component.tdk.com

Note: Indicate that you are using the MAX15118 when contacting these component suppliers.

Quick Start

Recommended Equipment

- MAX15118 EV kit
- 5V, 10A DC power supply
- Load capable of sinking 18A
- Digital voltmeter

Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify the board operation. **Caution: Do not turn on power supply until all connections are completed.**

- 1) Connect the positive terminal of the 5V supply to the IN PCB pad and the negative terminal to the nearest PGND PCB pad.
- 2) Connect the positive terminal of the 18A load to the OUT PCB pad and the negative terminal to the nearest PGND PCB pad.
- 3) Connect the digital voltmeter across the OUT PCB pad and the nearest PGND PCB pad.

- 4) Verify that a shunt is installed on jumper JU1.
- 5) Verify that a shunt is installed on pins 2-3 on jumper JU2.
- 6) Turn on the DC power supply.
- 7) Enable the load.
- 8) Verify that the voltmeter displays 1.5V.

Detailed Description of Hardware

The MAX15118 EV kit provides a proven design to evaluate the MAX15118 high-efficiency, 18A, step-down regulator with integrated switches. The applications include distributed power systems, portable devices, and preregulators. The EV kit is preset for 1.5V output at load currents up to 18A from a 2.7V to 5.5V input supply. The device features a 1MHz fixed switching frequency, which allows the EV kit to achieve an all-ceramic capacitor design and fast transient responses. Input aluminum electrolytic capacitors (C22, C27) are provided to damp the input if long wires are used; they are not required in a tight system design.

MAX15118 Evaluation Kit

Evaluates: MAX15118

Soft-Start and Reference Input (SS/REFIN)

The device utilizes an adjustable soft-start function to limit inrush current during startup. The soft-start time is adjusted by the value of C16, the external capacitor from SS/REFIN to GND. By default, C16 is currently 0.1μF, which gives a soft-start time of approximately 6ms. To adjust the soft-start time, determine C16 using the following formula:

$$C16 = (10\mu A \times t_{SS}) / 0.6V$$

where t_{SS} is the required soft-start time in seconds and C16 is in farads. C16 should be a minimum of 1nF capacitor between SS/REFIN and GND. The resistor, in series with the soft-start capacitor (R14), improves load regulation.

When no external reference is applied at SS/REFIN, the device uses the internal 0.6V reference. An external tracking reference with steady-state value between 0 and $V_{IN} - 2.5V$ can be applied to SS/REFIN. Refer to the *Setting the Soft-Start Time* section in the MAX15118 IC data sheet for a more detailed description. During 1ms hiccup timeout, the SS/REFIN pin is pulled to GND internally to discharge the soft-start capacitor. R6 limits the currents from an externally supplied reference during the 1ms hiccup timeout event.

Setting the Output Voltage

The EV kit can be adjusted from 0.6V up to $0.94 \times V_{IN}$ by changing the values of resistors R1 and R2. To determine the value of the resistor-divider, first select R2 between 1kΩ and 20kΩ. Then use the following equation to calculate R1:

$$R1 = R2 \left[\left(\frac{V_{OUT}}{V_{FB}} \right) - 1 \right]$$

where V_{FB} is equal to the reference voltage at SS/REFIN and V_{OUT} is the output. If no external reference is applied at SS/REFIN, the internal reference is automatically selected and V_{FB} becomes 0.6V. When regulating $V_{OUT} = 0.6V$ in skip mode, set R1 to 0Ω and keep R2 connected from FB to GND.

When R1 is changed, compensation components C14, R3, and C15 must be changed to ensure loop stability (refer to the *Compensation Design Guidelines* section in the MAX15118 IC data sheet).

Regulator Enable (EN)

The device features a regulator enable input. For normal operation, a shunt should be installed on jumper JU1. To disable the output, remove the shunt on JU1 and the EN pin is pulled to PGND through resistor R4. See Table 1 for JU1 settings.

Skip-Mode Input (SKIP)

The device offers selectable skip-mode functionality to reduce current consumption and achieve a higher efficiency at light loads. To operate in skip mode, install a shunt on pins 1-2 on jumper JU2. See Table 2 for JU2 settings. **Caution: Do not change the setting of the skip jumper while the device is operating.**

Quick-Test Edge Connector (EC1)

The EV kit includes a 305-020-520-202-compatible edge connector to facilitate testing of the board. Use of the connector simplifies electrical connections in thermal chambers, EMI chambers, and other setups that use remote wiring. The connector places the high-power connections on the top of the board, and the control and measurement connections on the bottom of the board. When interfacing to the connector, connect the negative lead of all instruments to pin 5 of EC1 to make proper Kelvin measurements. Q1 is optional for board-temperature measurement using a MAX1617, MAX6654, or a similar remote temperature sensor.

Table 1. Regulator Enable (EN) Jumper JU1 Description

SHUNT POSITION	EN PIN	DEVICE OUTPUT
Installed*	Connected to IN	Enabled
Not installed	Pulled to PGND through R4	Disabled

*Default position.

Table 2. Skip-Mode Input (SKIP) Jumper JU2 Description

SHUNT POSITION	SKIP PIN	MODE
1-2	Connected to EN	Skip-mode operation
2-3*	Connected to PGND	Forced-PWM operation

*Default position.

MAX15118 Evaluation Kit

Evaluates: MAX15118

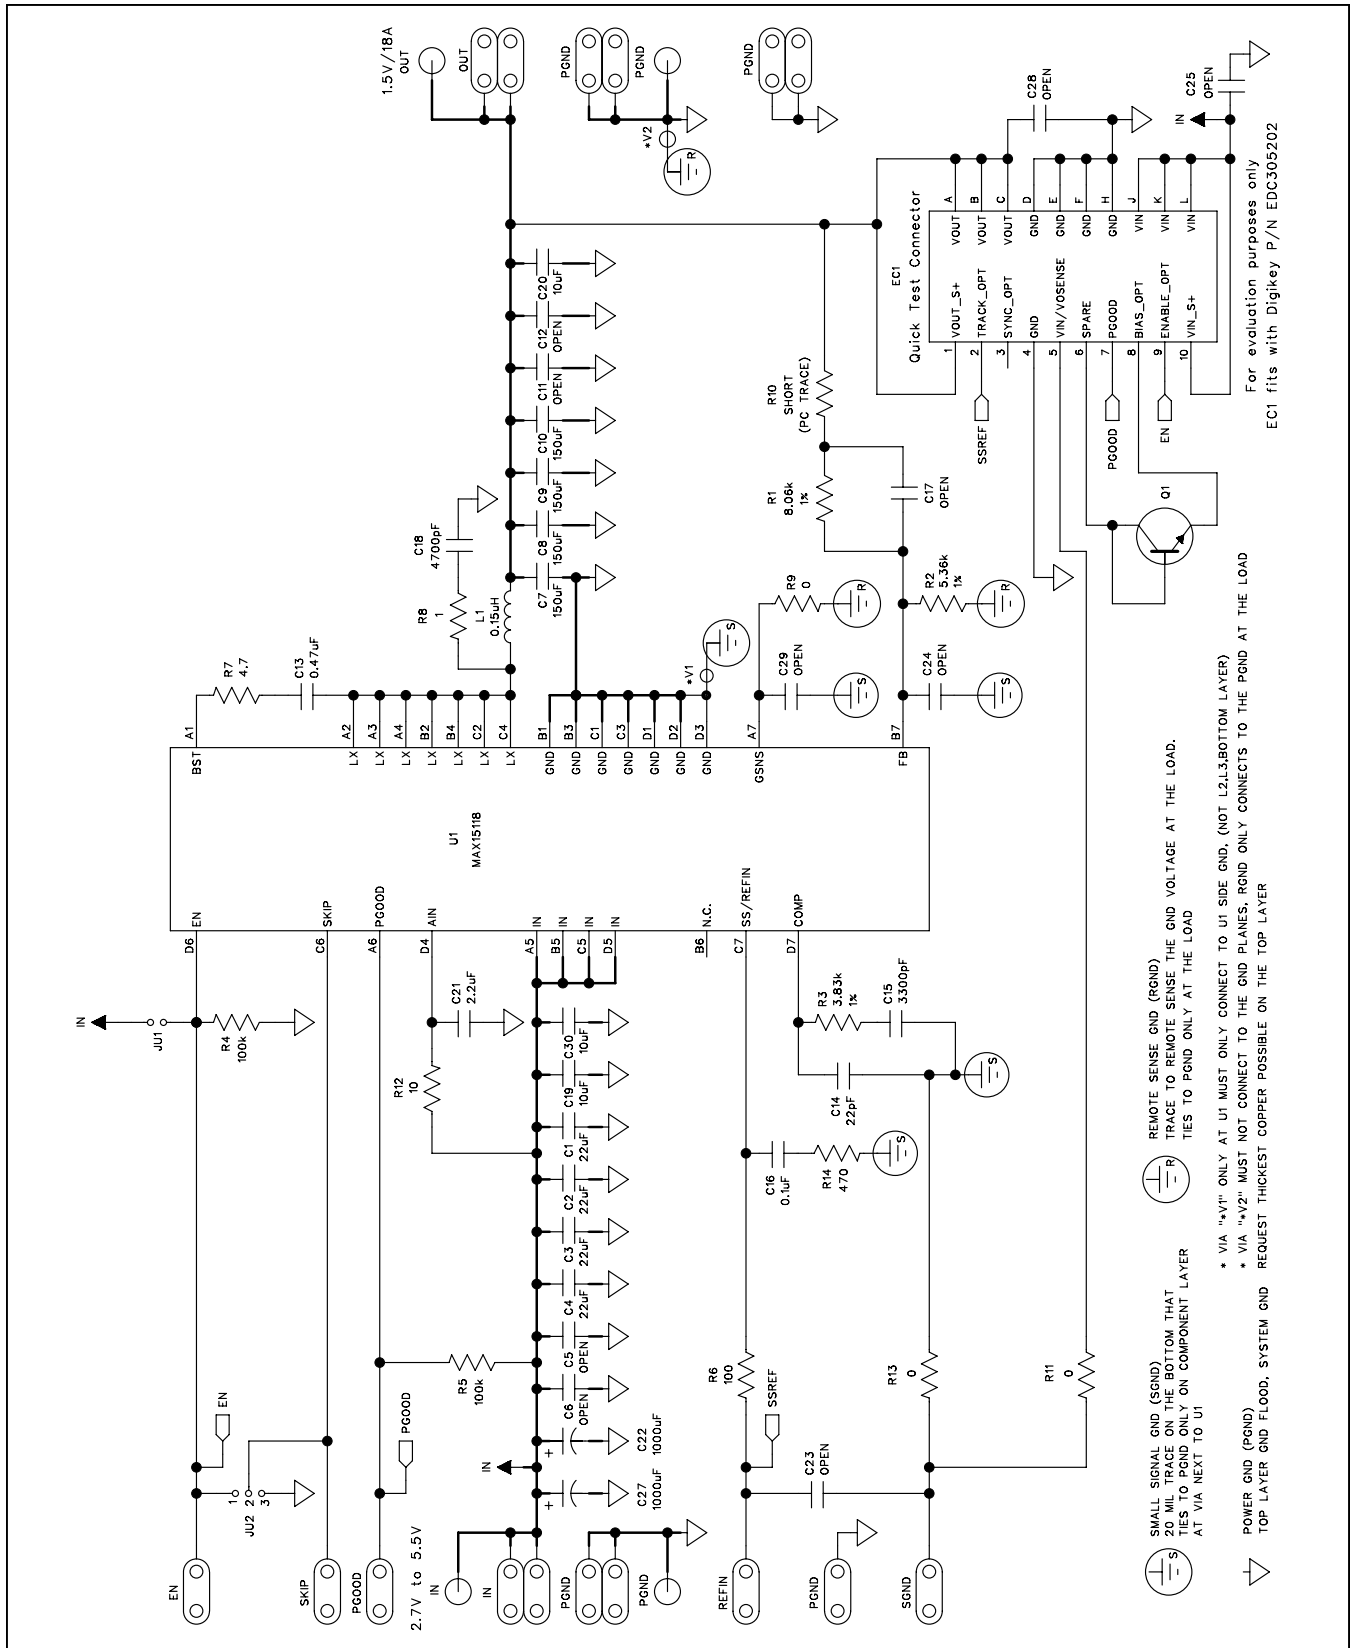


Figure 1. MAX15118 EV Kit Schematic

MAX15118 Evaluation Kit

Evaluates: MAX15118

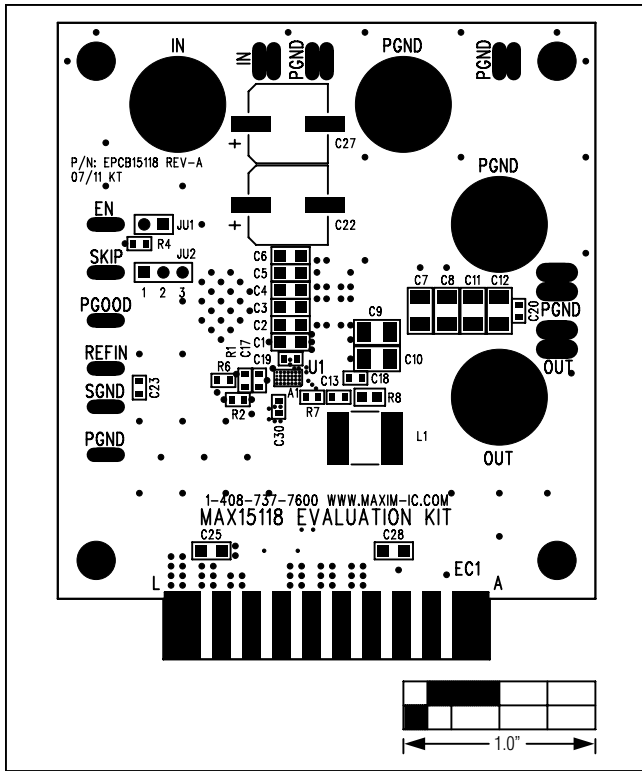


Figure 2. MAX15118 EV Kit Component Placement Guide—Component Side

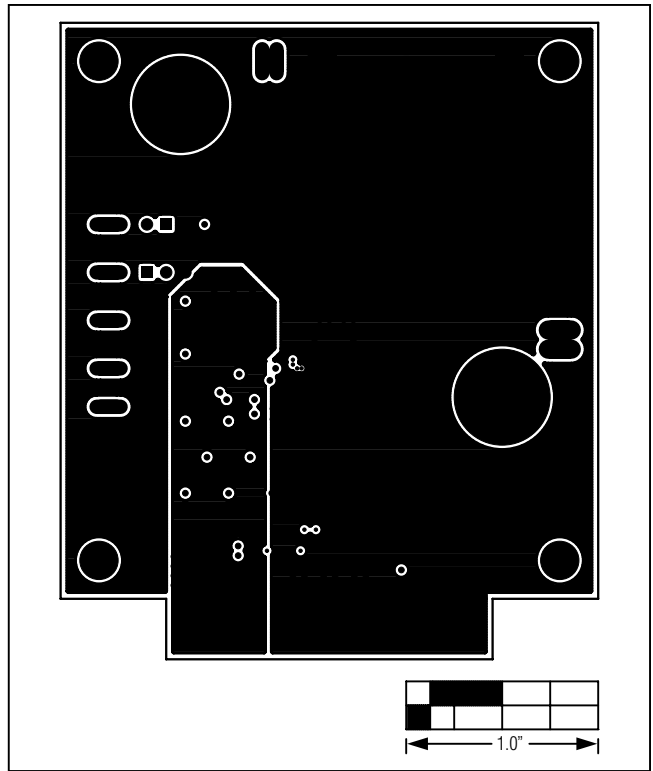


Figure 4. MAX15118 EV Kit PCB Layout—Inner Layer 2

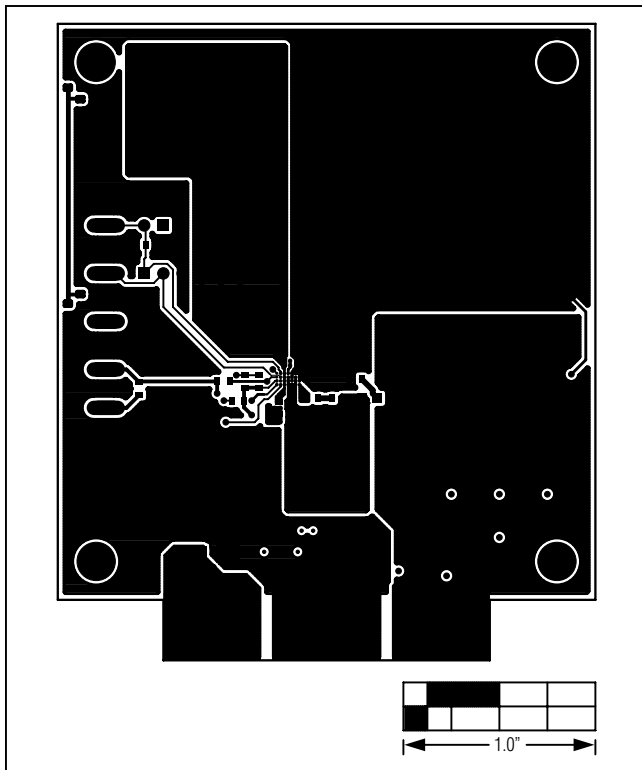


Figure 3. MAX15118 EV Kit PCB Layout—Component Side

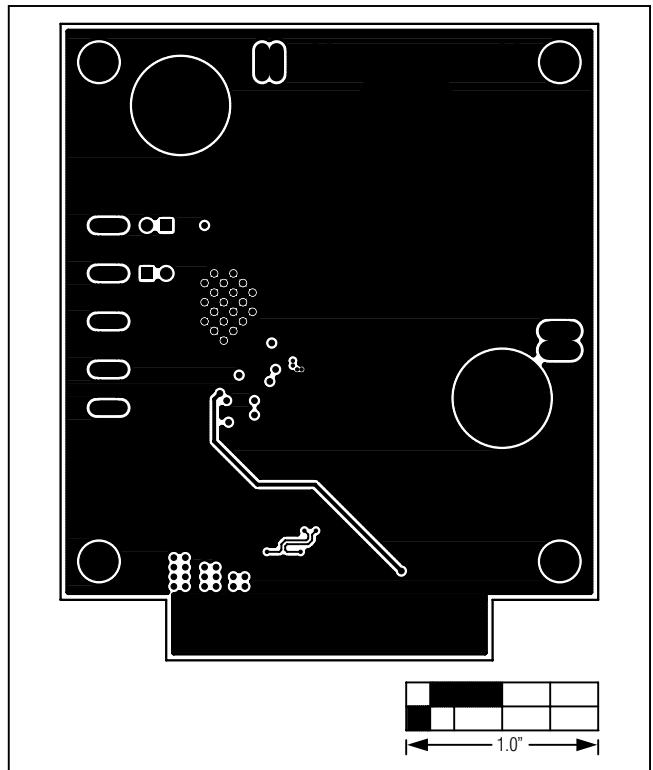


Figure 5. MAX15118 EV Kit PCB Layout—Inner Layer 3

MAX15118 Evaluation Kit

Evaluates: MAX15118

Ordering Information

PART	TYPE
MAX15118EVKIT#	EV Kit

#Denotes RoHS compliant.

MAX15118 Evaluation Kit

Evaluates: MAX15118

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	7/11	Initial release	—
1	9/12	Updated <i>Component List</i> and Figure 1	1, 4



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000

8

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com