


Model 4288 Adapter, SMA Male To BNC Male

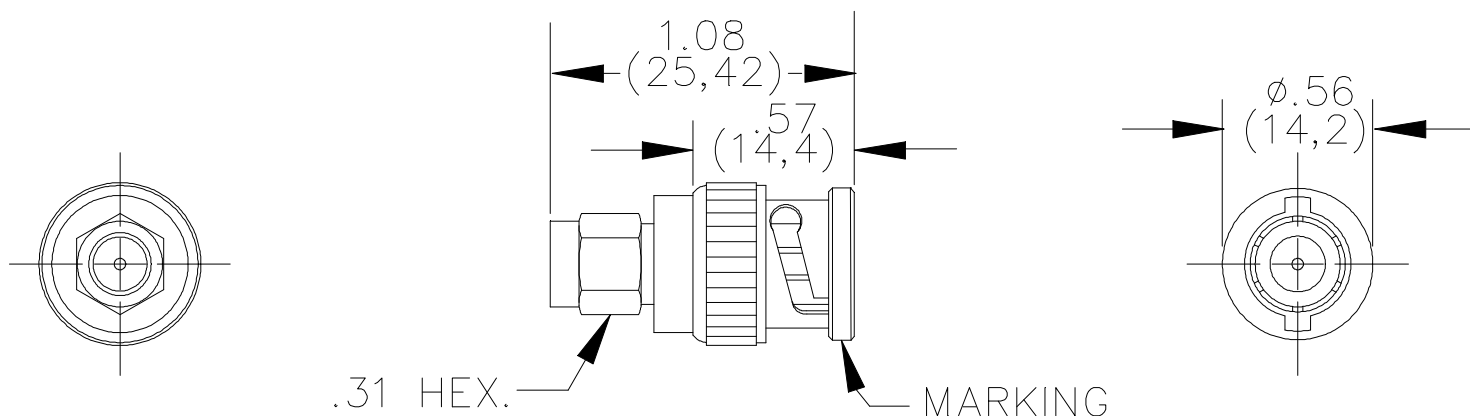

MATERIALS:

Body – Gold Plated Beryllium Copper, Male Contact - Gold Plated Brass,
 Dielectric: Teflon per L-P-403
 Finish: Body and Contacts – Gold plated per MIL-G-45204, Type II, Class 2
 Marking: “Pomona 4288”

RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.
 Inner Conductor/Shield: 335VRMS Max.
 Operating Temperature: -65°C (-85°F) to +165°C (+329°F)
 Nominal Impedance: 50 Ohms
 Frequency Range: 0-12.4 GHz.

ORDERING INFORMATION: Model 4288

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com