

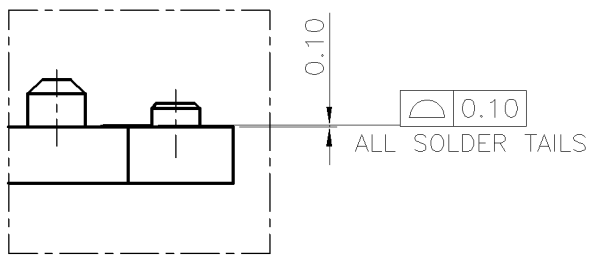
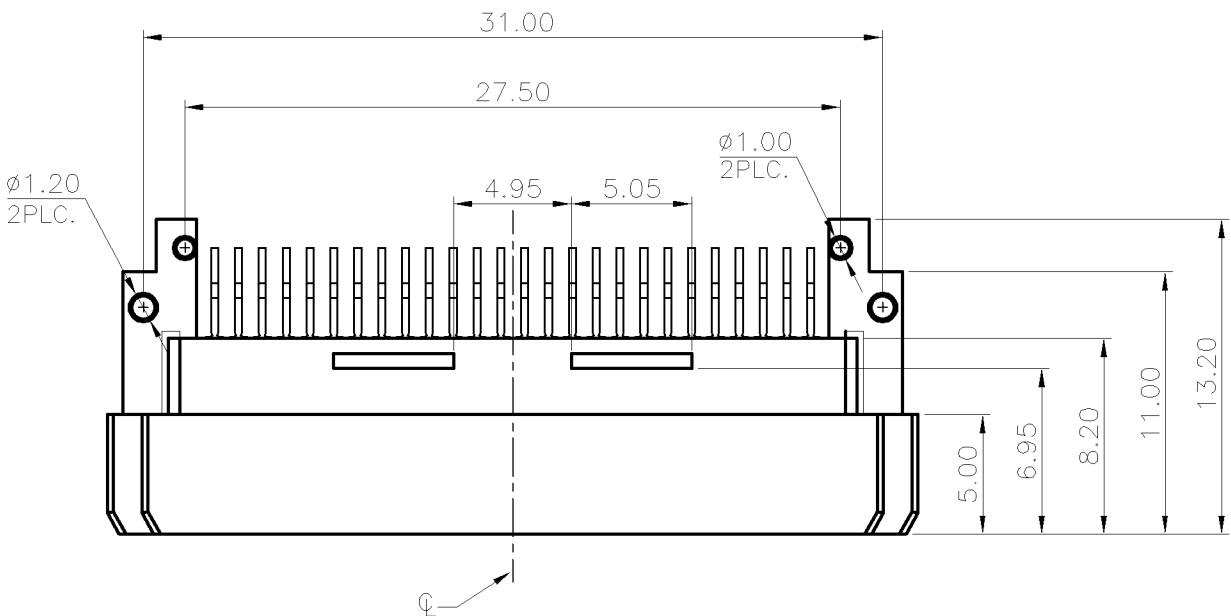
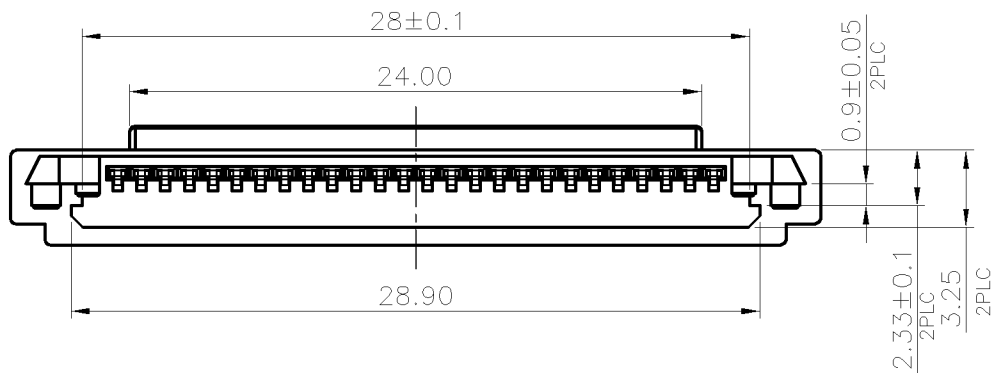


2		1				
LOC	DIST	REVISIONS				
DW	—	P	LTR	DESCRIPTION	DATE	APVD
			B2	REVISED (ECR-10-011754)	03JUN10	SC WK


- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC(LCP), UL94V-0; COLOR:BLACK.
 - CONTACTS: BRASS
 - FINISH:
 - CONTACT:
0.254μm[10μ"]MIN. GOLD PLATING ON CONTACT AREA,
2.54μm[100μ"]MIN. MATTE TIN PLATING ON SOLDER TAIL AREA,
1.27μm[50μ"]MIN. NICKEL UNDERPLATING OVERALL.
 - RECOMMENDED PCB THICKNESS: 0.5mm
 - REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC. 109-201, CONDITION B.
 - SPECIFICATION:
 - CURRENT RATING: 0.75A MAX.
 - VOLTAGE: 100VAC
 - TEMPERATURE RANGE: -55°C~85°C
 - CONTACT RESISTANCE: 40 MILLIOHM MAX. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500VAC r.m.s
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.

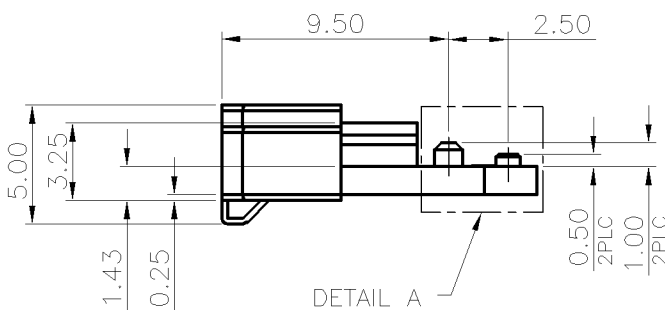


DETAIL A
SCALE 2:1

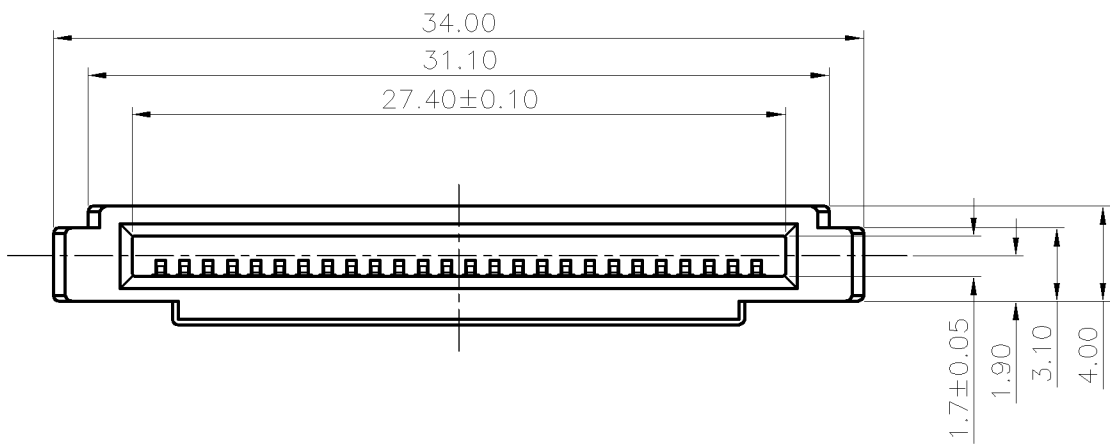


DETAIL A

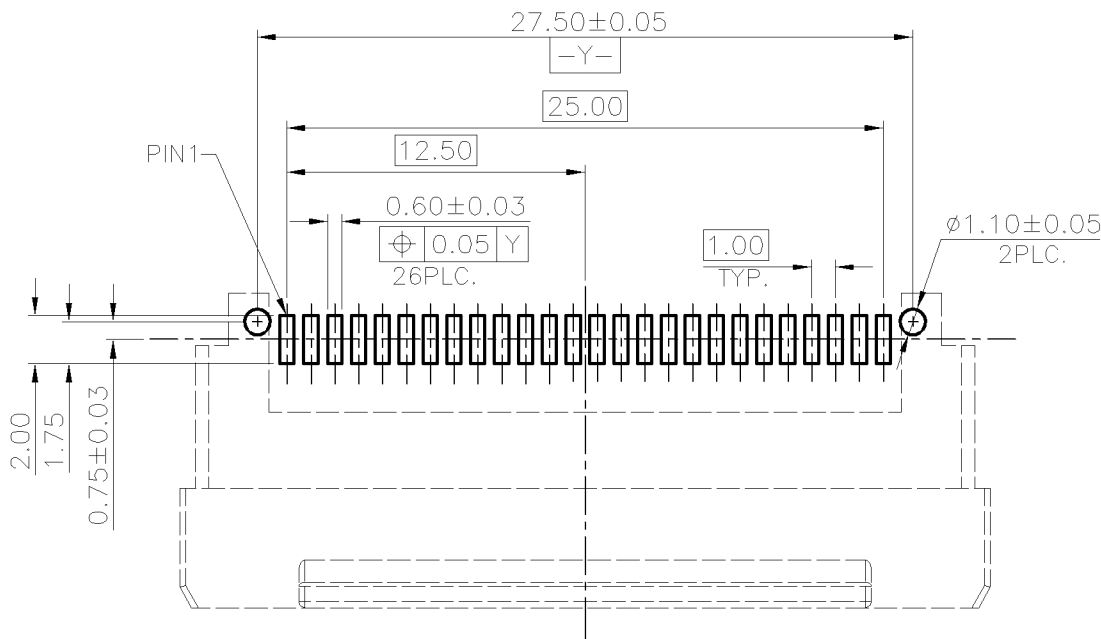

RECOMMENDED PCB LAYOUT CONNECTOR SIDE
GENERAL TOLERANCE ±0.05

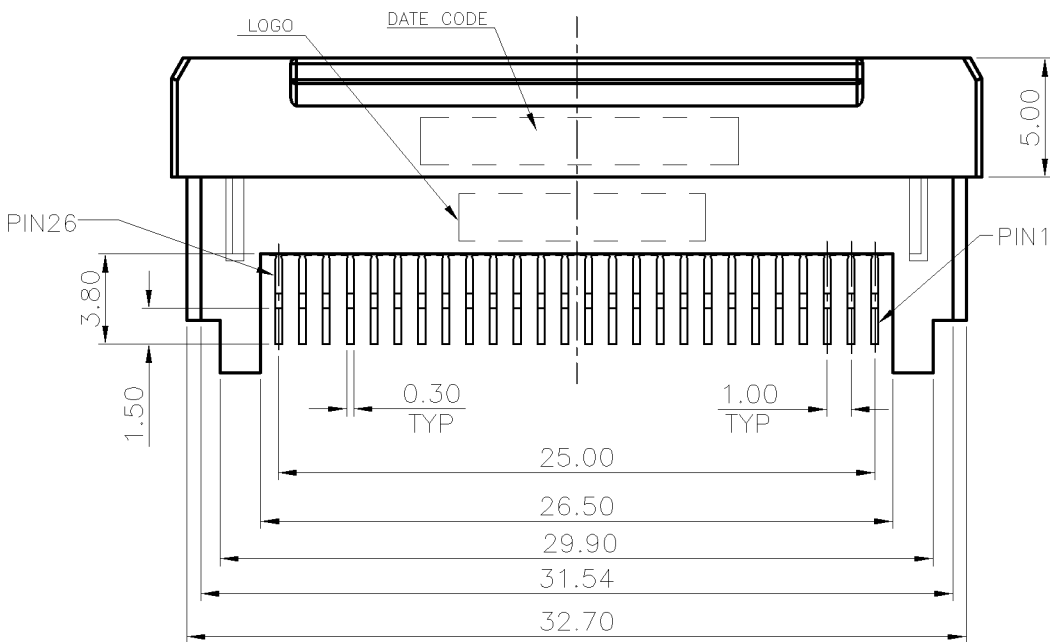

1470828-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOU 09APR2008		 Tyco Electronics Corporation Taipei, Taiwan			
DIMENSIONS: MM		CHK W. KODAMA 09APR2008					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.10 4 PLC ± - ANGLES ± 1.5°		APVD W. KODAMA 09APR2008		NAME EXPRESS CARD 26PIN HEADER CONNECTOR SMT TYPE		
			PRODUCT SPEC 108-57399				
			QUALIFICATION TEST REPORT 501-57431				
			WEIGHT 1.5 GRAM				
			CUSTOMER DRAWING				
MATERIAL SEE NOTE		FINISH SEE NOTE		SIZE A3	CAGE CODE 00779	DRAWING NO C=1470828	RESTRICTED TO REV B2
				SCALE —	SHEET 1 of 2		

4

3





2

1




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT — BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

- NOTES:
- MATERIAL :
 - EMBOSSED CARRIER: HIPS
 - COVER TAPE: PET
 - SHIPPING BOX: CORRUGATED FIBER
 - DIMENSION :
 - REEL: W=56.4, $\phi A=330$
 - SHIPPING BOX: L=335, W=335, H=305
 - QUANTITY :
 - PRIMDARY PACKING: 600PCS/REEL
 - SECONDARY PACKING: 4 REELS/BOX(2,400PCS)
 - WEIGHT :
 - NET WEIGHT: 0.90Kg/REEL, 3.60Kg/BOX.
 - GROSS WEIGHT: 1.5Kg/REEL, 6.0Kg/BOX.
 - PEELING RESISTANCE: 0.1~0.7N(10.2gf~71.4gf).
 - PEELING SPEED: 300mm/minutes.

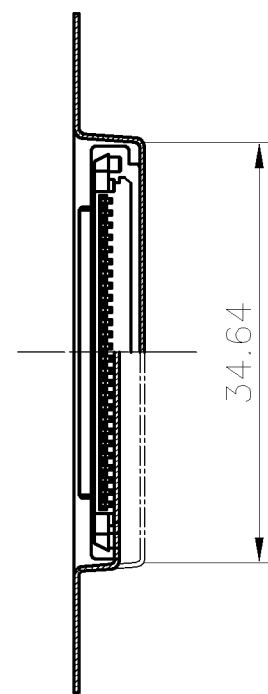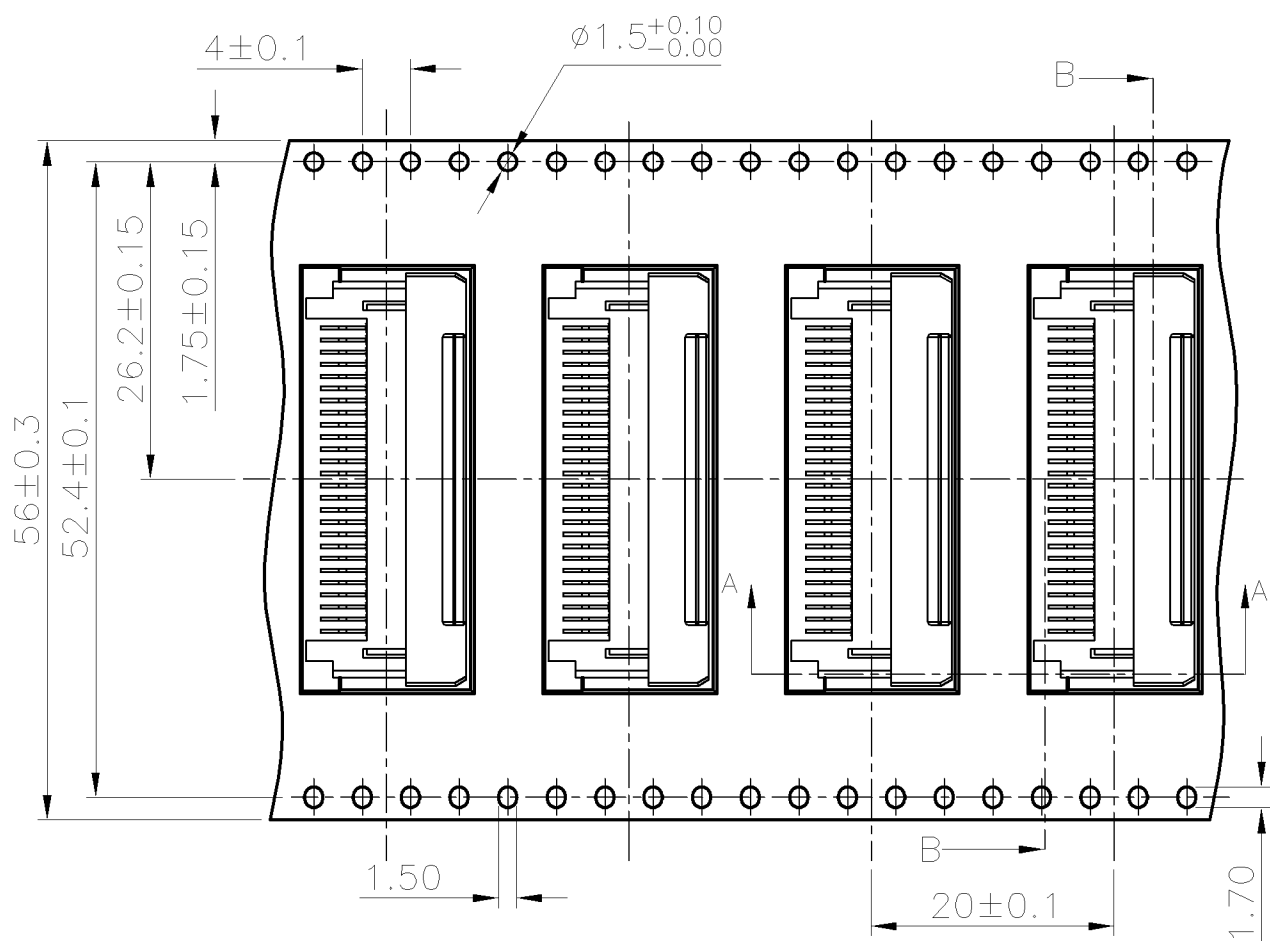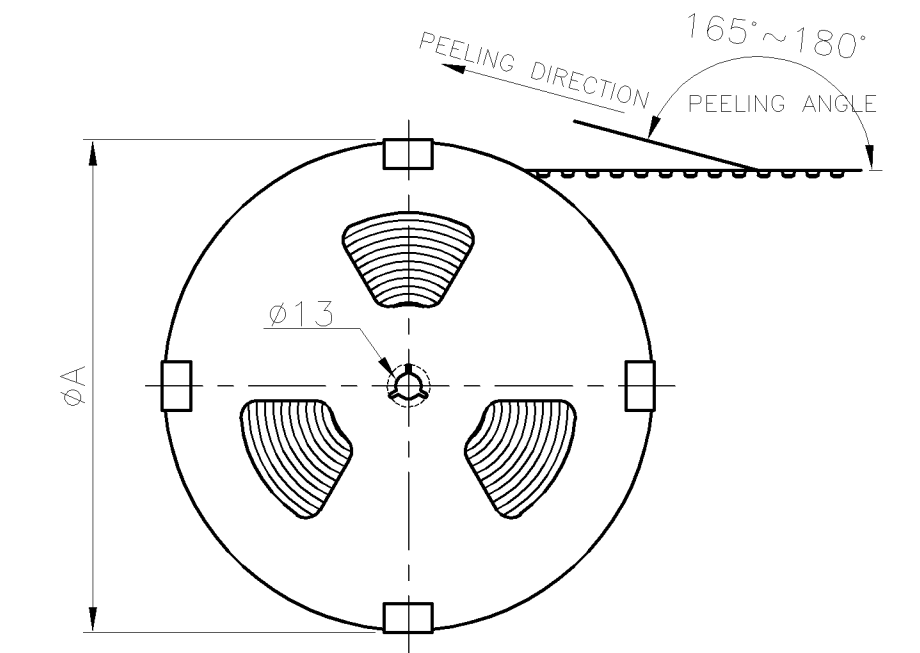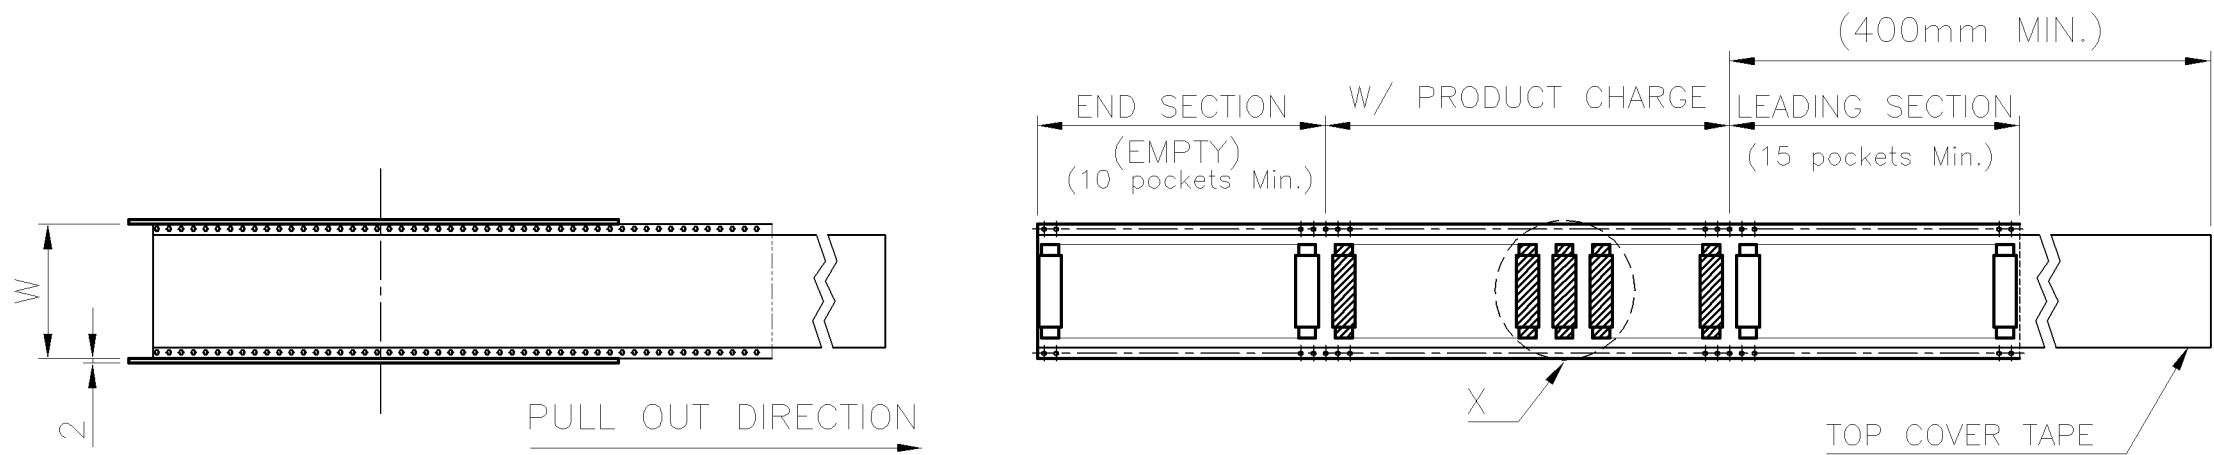

SECTION B-B

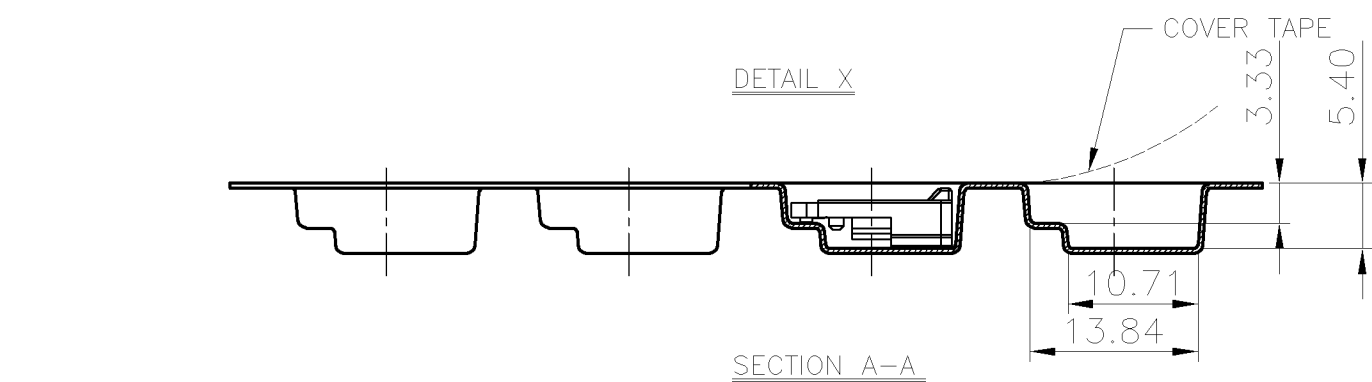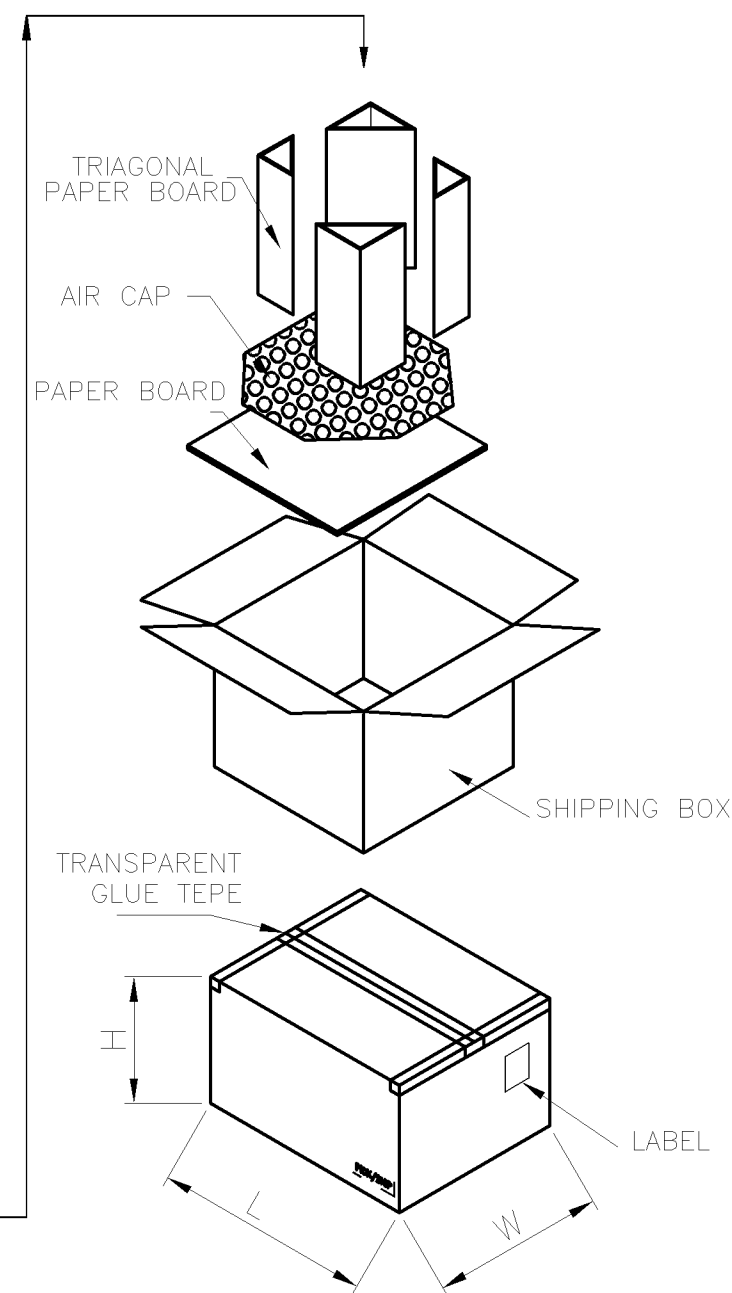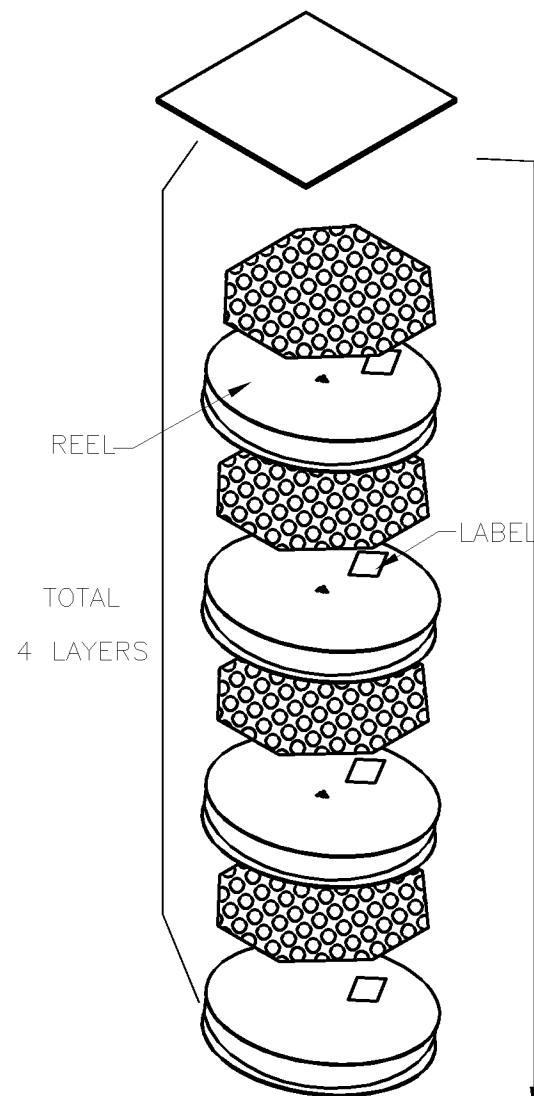

DETAIL X

SECTION A-A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOU	09APR2008	Tyco Electronics Corporation Taipei, Taiwan		
		CHK W. KODAMA	09APR2008	NAME		
		APVD W. KODAMA	09APR2008	EXPRESS CARD 26PIN HEADER CONNECTOR SMT TYPE		
		PRODUCT SPEC	—	RESTRICTED TO		
		QUALIFICATION TEST REPORT	—	SIZE	CAGE CODE	DRAWING NO
		WEIGHT	—	A3	00779	C=1470828
CUSTOMER DRAWING		SCALE	—	SHEET	2 OF 2	REV B2

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :
401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :
Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :
Email service@ameya360.com

➤ Partnership :
Tel +86 (21) 64016692-8333
Email mkt@ameya360.com