

**HONEYWELL
PART NUMBER**

2PB1000

REV	DOCUMENT	CHANGED BY	CHECK
C	0066505	SSK 18JUN10	CMH

CHARACTERISTICS:

OPERATING FORCE: 1 1/2 LB APPROX

ELECTRICAL DATA:

CONTACT ARRANGEMENT: S P D T (2)

30 VOLTS DC RATING




INDUCTIVE --- SEA LEVEL --- 0.5 AMP

50,000 FT - - - - 0.5 AMP

RESISTIVE --- SEA LEVEL --- 1.0 AMP

50,000 FT - - - - 1.0 AMP

MAXIMUM INRUSH ----- 2.0 AMP

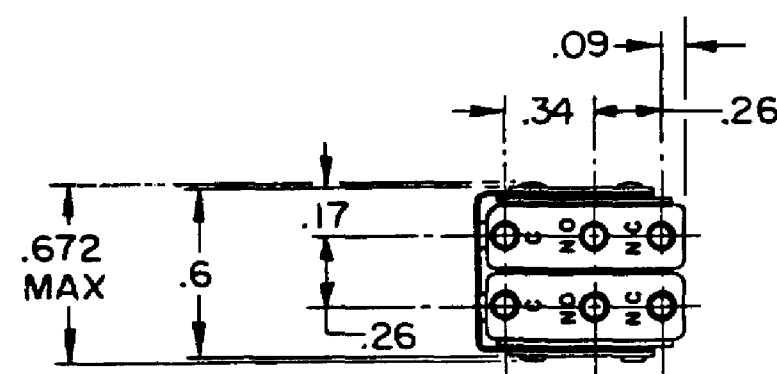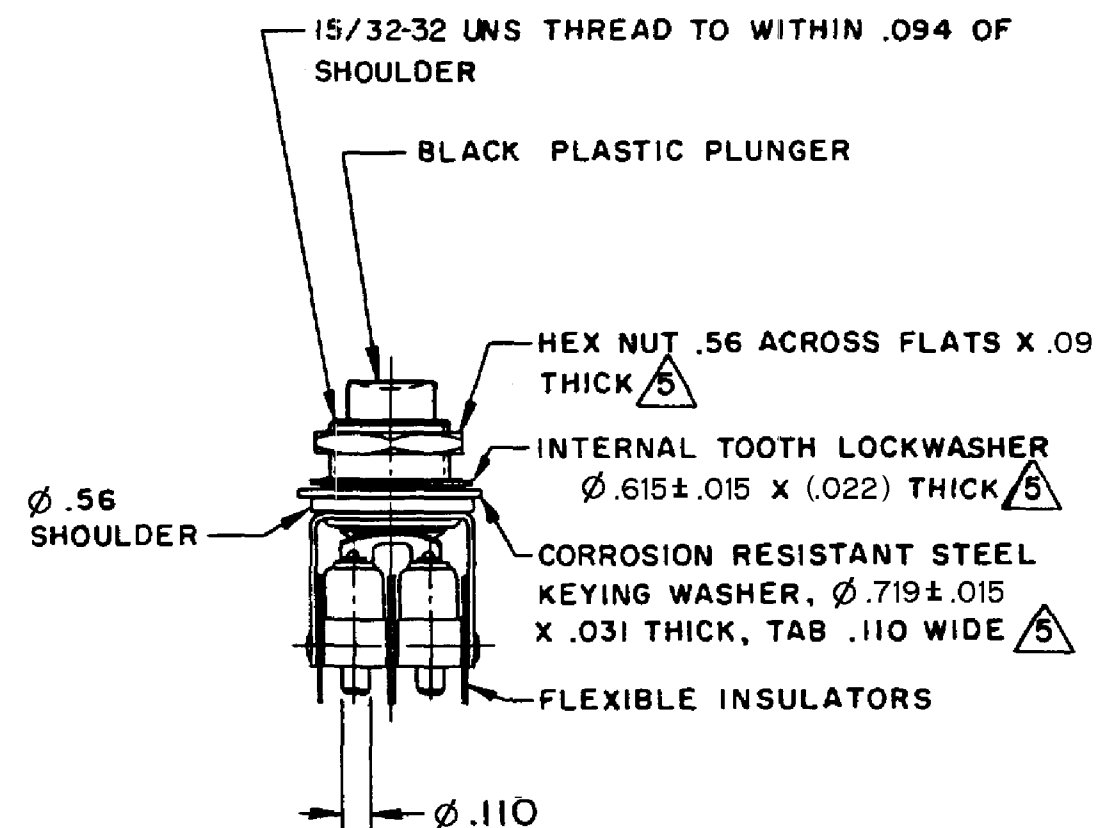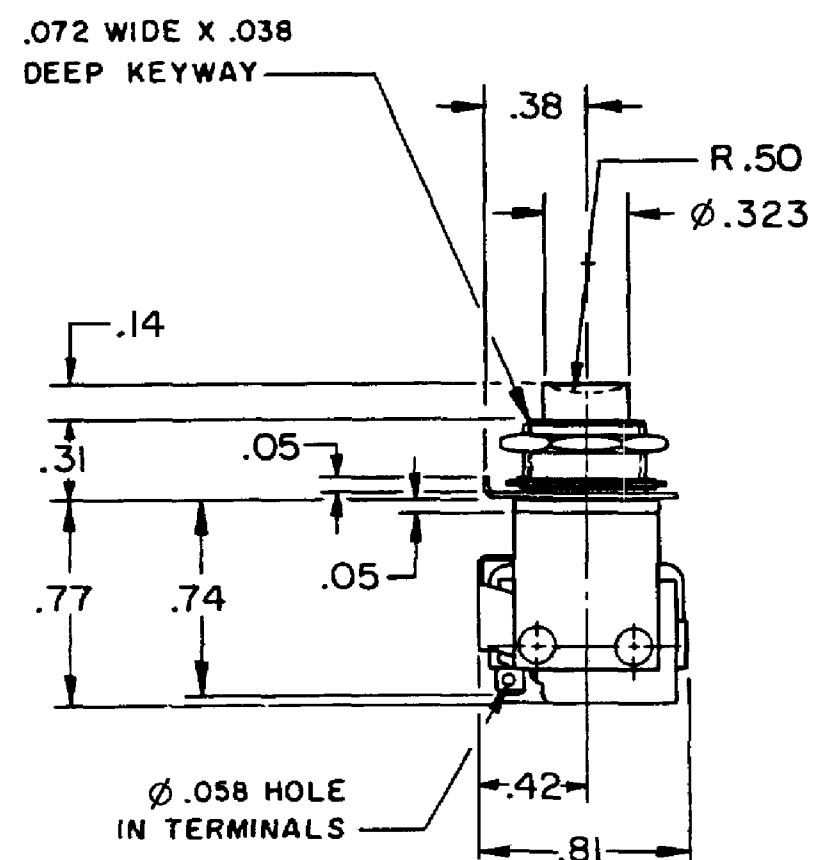


NOTES

- 1 - UNIT INCLUDES CAT. LIST. "12SM" TYPE BASIC SWITCH (2)
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - BASIC SWITCHES OPERATE WITHIN .008 OF EACH OTHER
(PUSHBUTTON PLUNGER TRAVEL)
- 4 - UNIT WILL PERFORM SATISFACTORILY IN TEMPERATURES TO MINUS 65°F
- 5 - MOUNTING HARDWARE FURNISHED UNASSEMBLED

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-

THIRD ANGLE PROJECTION



RAW MATERIAL : COMMERCIAL STANDARD

DRAWN	SPK	20APR05
CHECK	AK	20APR05
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

Honeywell

D	TITLE
	ASSEMBLY, PUSH BUTTON SWITCH

SIZE	TYPE	CAGE_CODE	DRAWING NAME	REV
B	I	91929	2PB1000	C
SCALE	NONE		SHEET	OF

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com