



# IR Emitter and Detector Product Data Sheet

## LTE-2871C

Spec No.: DS-50-92-0006

Effective Date: 05/10/2000

Revision: B

**LITE-ON DCC**

**RELEASE**

BNS-OD-FC001/A4

**LITE-ON Technology Corp. / Optoelectronics**


No.90,Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C.

Tel: 886-2-2222-6181 Fax: 886-2-2221-1948 / 886-2-2221-0660

<http://www.liteon.com/opto>

**FEATURES**

- \* SPECIAL FOR HIGH INTENSITY
- \* LOW COST
- \* NARROW BEAM
- \* T-1 3/4 MODIFIED PACKAGE
- \* SMOKING TRANSPARENT COLOR PACKAGE

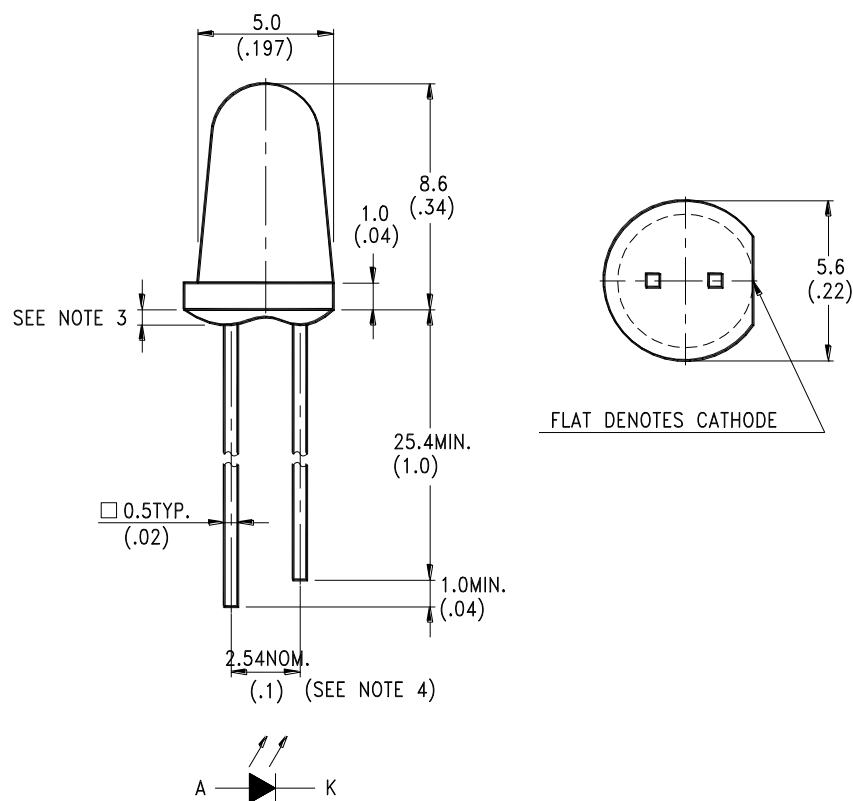**PACKAGE DIMENSIONS****NOTES:**

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}(.010")$  unless otherwise noted.
3. Protruded resin under flange is  $1.0\text{mm}(.039")$  max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.

**ABSOLUTE MAXIMUM RATINGS AT TA=25°C**

| PARAMETER                                              | MAXIMUM RATING      | UNIT |
|--------------------------------------------------------|---------------------|------|
| Power Dissipation                                      | 90                  | mW   |
| Peak Forward Current (300pps, 10 $\mu$ s pulse)        | 1                   | A    |
| Continuous Forward Current                             | 60                  | mA   |
| Reverse Voltage                                        | 5                   | V    |
| Operating Temperature Range                            | -40°C to + 85°C     |      |
| Storage Temperature Range                              | -55°C to + 100°C    |      |
| Lead Soldering Temperature<br>[1.6mm(.063") From Body] | 260°C for 5 Seconds |      |

**ELECTRICAL OPTICAL CHARACTERISTICS AT TA=25°C**

| PARAMETER                  | SYMBOL           | MIN. | TYP. | MAX.  | UNIT               | TEST CONDITION        | BIN NO. |
|----------------------------|------------------|------|------|-------|--------------------|-----------------------|---------|
| Aperture Radiant Incidence | Ee               | 0.44 |      | 0.96  | mW/cm <sup>2</sup> | I <sub>F</sub> = 20mA | BIN A   |
|                            |                  | 0.64 |      | 1.20  |                    |                       | BIN B   |
|                            |                  | 0.80 |      | 1.68  |                    |                       | BIN C   |
|                            |                  | 1.12 |      |       |                    |                       | BIN D   |
| Radiant Intensity          | I <sub>E</sub>   | 3.31 |      | 7.22  | mW/sr              | I <sub>F</sub> = 20mA | BIN A   |
|                            |                  | 4.81 |      | 9.02  |                    |                       | BIN B   |
|                            |                  | 6.02 |      | 12.63 |                    |                       | BIN C   |
|                            |                  | 8.42 |      |       |                    |                       | BIN D   |
| Peak Emission Wavelength   | $\lambda_{Peak}$ |      | 940  |       | nm                 | I <sub>F</sub> = 20mA |         |
| Spectral Line Half-Width   | $\Delta \lambda$ |      | 50   |       | nm                 | I <sub>F</sub> = 20mA |         |
| Forward Voltage            | V <sub>F</sub>   |      | 1.2  | 1.6   | V                  | I <sub>F</sub> = 20mA |         |
| Reverse Current            | I <sub>R</sub>   |      |      | 100   | $\mu$ A            | V <sub>R</sub> = 5V   |         |
| Viewing Angle (See FIG.6)  | 2 $\theta_{1/2}$ |      | 16   |       | deg.               |                       |         |

## TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

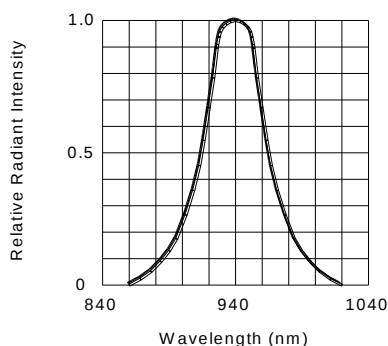


FIG.1 SPECTRAL DISTRIBUTION

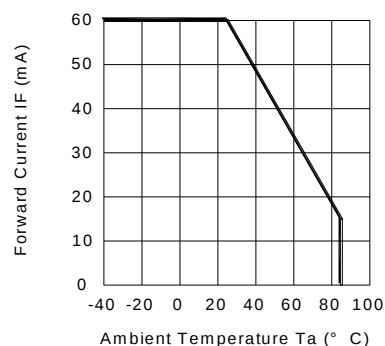


FIG.2 FORWARD CURRENT VS. AMBIENT TEMPERATURE

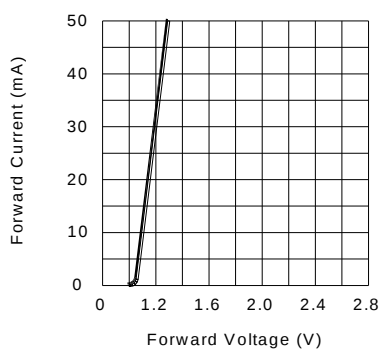


FIG.3 FORWARD CURRENT VS. FORWARD VOLTAGE

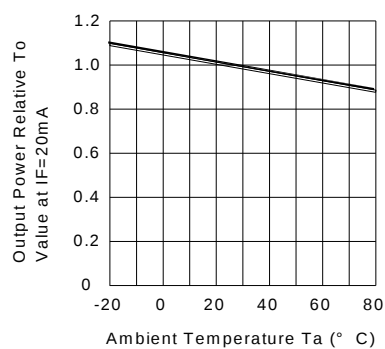


FIG.4 RELATIVE RADIANT INTENSITY VS. AMBIENT TEMPERATURE

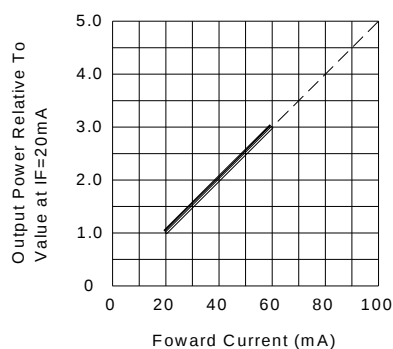


FIG.5 RELATIVE RADIANT INTENSITY VS. FORWARD CURRENT

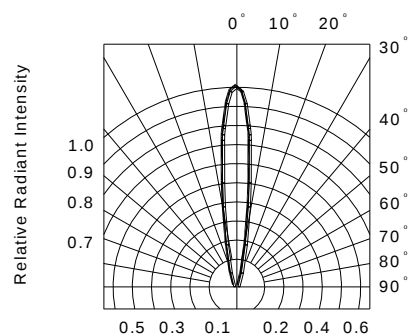


FIG.6 RADIATION DIAGRAM

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)