

# Surface Mount Optically Coupled Isolator


4N22U, 4N23U, 4N24U (COTS, TX, TXV)

4N47U, 4N48U, 4N49U (COTS, TX, TXV)



## Features:

- Surface Mount (SM), Leadless Chip Carrier (LCC)
- 1 kV electrical isolation
- Base contact provided for conventional transistor biasing
- TX and TXV devices processed to MIL-PRF-19500

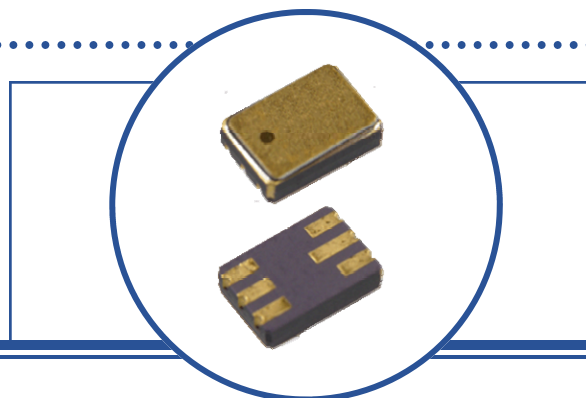

## Description:

Each isolator in this series has a 890 nm (for the 4N2\_U series) and 935nm (for the 4N4\_ series) wavelength infrared emitting diode and a NPN silicon phototransistor, which are mounted in a hermetically sealed Surface Mount, 6 Pin package. Devices are designed for military and/or harsh environments. Burn-in condition is  $V_{CE} = 10V$ ,  $I_F = 40mA$ ,  $P_D = 275 mW$ ,  $T_A = 25^\circ C$ .

The 4N22U, 4N23U and 4N24U (TX, TXV) devices are processed to MIL-PRF-19500/486. The 4N47U, 4N48U and 4N48U (TX, TXV) devices are processed to MIL-PRF-19500/548.

Please contact your local representative or OPTEK for more information.

## Applications:

- Military equipment
- High-Reliability environments
- High voltage isolation between input and output
- Electrical isolation in dirty environments
- Industrial equipment
- Medical equipment
- Office equipment

### Ordering Information

Part Number	LED Peak Wavelength	Sensor	Isolation Voltage (kV)	CTR % Minimum	$I_F$ (mA) Typ / Max	$V_{CE}$ (Volts) Max	Processing MIL-PRF-195000		
4N22U	890 nm	Transistor	1	25	10 / 40	35	COTS		
4N22UTX							486		
4N22UTXV							486		
4N23U				60			COTS		
4N23UTX				486					
4N23UTXV				486					
4N24U				100			COTS		
4N24UTX				486					
4N24UTXV				486					
4N47U	935 nm			Transistor	1	50	10 / 40	45	COTS
4N47UTX									548
4N47UTXV									548
4N48U						100			COTS
4N48UTX						548			
4N48UTXV						548			
4N49U						200			COTS
4N49UTX						548			
4N49UTXV						548			



RoHS

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.



# Surface Mount Optically Coupled Isolator

4N22U, 4N23U, 4N24U (COTS, TX, TXV)  
4N47U, 4N48U, 4N49U (COTS, TX, TXV)



## Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Storage Temperature	-65° C to +150° C
Operating Temperature	-55° C to +125° C
Input-to-Output Isolation Voltage <sup>(1)(2)</sup>	± 1 kVDC
Lead Soldering Temperature (1/16" (1.6 mm) from case for 5 seconds with soldering iron) <sup>(3)</sup>	260° C
<b>Input Diode</b>	
Forward DC Current <sup>(4)</sup>	50 mA
Reverse DC Voltage	2 V
Power Dissipation <sup>(5)</sup>	300 mW
<b>Output Photosensor</b>	
Collector-Emitter Voltage	35 V
Emitter-Collector Voltage	7.0 V
Power Dissipation <sup>(6)</sup>	100 mW

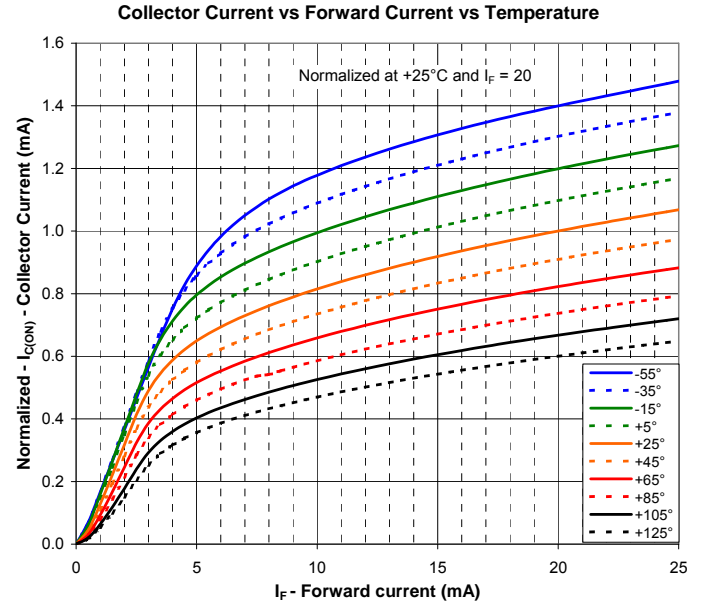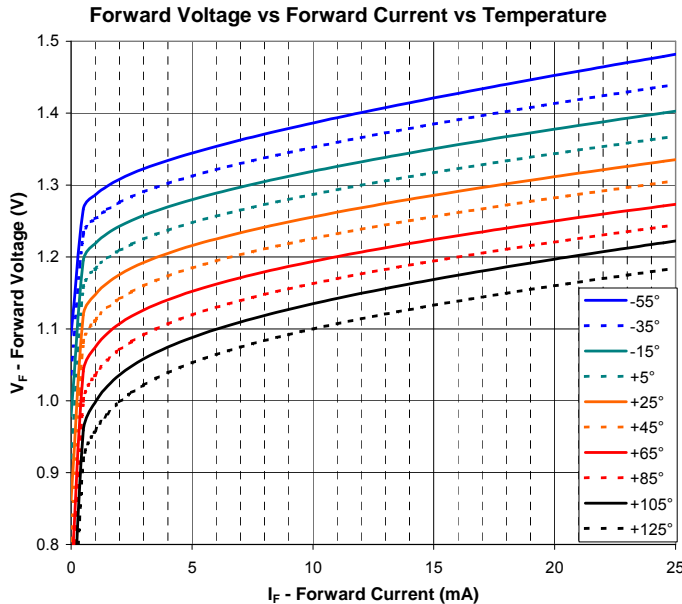

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

# Surface Mount Optically Coupled Isolator

## 4N22U, 4N23U, 4N24U (COTS, TX, TXV)

## 4N47U, 4N48U, 4N49U (COTS, TX, TXV)



### Electrical Characteristics (T<sub>A</sub> = 25° C unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

#### Input Diode (See OP165 or OP265 for additional information - for reference only)



V <sub>F</sub>	Forward Voltage					
	4N22, 4N23, 4N24 [A] (COTS, TX, TXV)	0.80	-	1.30		I <sub>F</sub> = 10.0 mA
	4N22, 4N23, 4N24 [A] (COTS, TX, TXV)	1.00	-	1.50		I <sub>F</sub> = 10.0 mA, T <sub>A</sub> = -55° C <sup>(1)</sup>
	4N22, 4N23, 4N24 [A] (COTS, TX, TXV)	0.70	-	1.20	V	I <sub>F</sub> = 10.0 mA, T <sub>A</sub> = -100° C <sup>(1)</sup>
	4N47, 4N48, 4N49 [A] (COTS, TX, TXV)	0.80	-	1.50		I <sub>F</sub> = 10.0 mA
	4N47, 4N48, 4N49 [A] (COTS, TX, TXV)	1.00	-	1.70		I <sub>F</sub> = 10.0 mA, T <sub>A</sub> = -55° C <sup>(1)</sup>
I <sub>R</sub>	Reverse Current	-	-	100	μA	V <sub>R</sub> = 2.0 V
	4N47, 4N48, 4N49 [A] (COTS, TX, TXV)	0.70	-	1.30		I <sub>F</sub> = 10.0 mA, T <sub>A</sub> = -100° C <sup>(1)</sup>

#### Output Photosensor (See OP505 for additional information - for reference only)

V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage 4N22U Series 4N47U Series	35 40	80 90	- -	V	I <sub>C</sub> = 100 μA, I <sub>F</sub> = 0
V <sub>(BR)ECO</sub>	Emitter-Collector Breakdown Voltage 4N22U Series 4N47U Series	4 7	6 10	- -	V	I <sub>E</sub> = 100 μA, I <sub>F</sub> = 0
I <sub>CEO</sub>	Collector-Emitter Dark Current	- -	20 -	100 100	nA μA	V <sub>CE</sub> = 20 V, I <sub>F</sub> = 0 I <sub>B</sub> = 0 T <sub>A</sub> = 25° C V <sub>CE</sub> = 20 V, I <sub>F</sub> = 0 I <sub>B</sub> = 0 T <sub>A</sub> = 100° C
V <sub>CE(SAT)</sub>	Collector Saturation Voltage	-	0.2	0.3	V	I <sub>F</sub> = 20 mA, I <sub>C</sub> = 2 mA

#### Notes:

- (1) Measured with input and output leads shorted. Typical input/output capacitance is 0.06 pF.
- (2) UL recognition is for 3500 VAC for one minute.
- (3) RMA flux is recommended. The duration can be extended to 10 seconds maximum when flow soldering.
- (4) Derate linearly 0.67 mA/°C above 25° C.
- (5) Derate linearly 0.83 mA/°C above 25° C.
- (6) Derate linearly 1.67 mA/°C above 25° C.

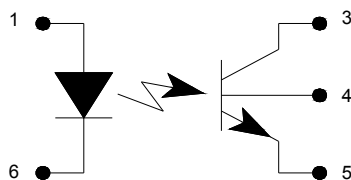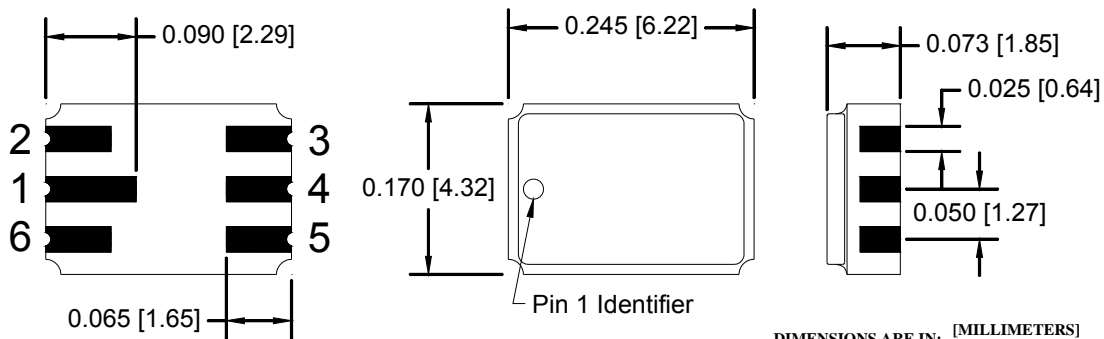

Pin #	LED	Pin #	Transistor
2	N/A	3	Collector
1	Anode	4	Base
6	Cathode	5	Emitter

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

**Surface Mount Optically Coupled Isolator**  
**4N22U, 4N23U, 4N24U (COTS, TX, TXV)**  
**4N47U, 4N48U, 4N49U (COTS, TX, TXV)**



**Coupled**

$I_C/I_F$	DC Current Transfer Ratio	4N22U	25	-	-	%	$I_F = 10 \text{ mA}, V_{CE} = 5 \text{ V}$
		4N23U	60	-	-		
		4N24U	100	-	-		
		4N47U	50	-	-	%	$I_F = 2 \text{ mA}, V_{CE} = 5 \text{ V}$
		4N48U	100	-	-		
		4N49U	200	-	-		
$I_{C(ON)}$	On-State Collector Current	4N22U	0.15	-	-	mA	$V_{CE} = 10 \text{ V}, I_B = 0, I_F = 2.0 \text{ mA } T_A = 25^\circ\text{C}$ $V_{CE} = 10 \text{ V}, I_B = 0, I_F = 10.0 \text{ mA } T_A = 25^\circ\text{C}$ $V_{CE} = 10 \text{ V}, I_B = 0, I_F = 10.0 \text{ mA } T_A = -55^\circ\text{C}$ $V_{CE} = 10 \text{ V}, I_B = 0, I_F = 10.0 \text{ mA } T_A = 100^\circ\text{C}$
			2.50	-	-		
			1.00	-	-		
			1.00	-	-		
		4N23U	0.2	-	-	mA	$V_{CE} = 10 \text{ V}, I_B = 0, I_F = 2.0 \text{ mA } T_A = 25^\circ\text{C}$ $V_{CE} = 10 \text{ V}, I_B = 0, I_F = 10.0 \text{ mA } T_A = 25^\circ\text{C}$ $V_{CE} = 10 \text{ V}, I_B = 0, I_F = 10.0 \text{ mA } T_A = -55^\circ\text{C}$ $V_{CE} = 10 \text{ V}, I_B = 0, I_F = 10.0 \text{ mA } T_A = 100^\circ\text{C}$
			6.0	-	-		
			2.5	-	-		
4N24U	0.4	-	-	mA	$V_{CE} = 10 \text{ V}, I_B = 0, I_F = 2.0 \text{ mA } T_A = 25^\circ\text{C}$ $V_{CE} = 10 \text{ V}, I_B = 0, I_F = 10.0 \text{ mA } T_A = 25^\circ\text{C}$ $V_{CE} = 10 \text{ V}, I_B = 0, I_F = 10.0 \text{ mA } T_A = -55^\circ\text{C}$ $V_{CE} = 10 \text{ V}, I_B = 0, I_F = 10.0 \text{ mA } T_A = 100^\circ\text{C}$		
	10.0	-	-				
	4.0	-	-				
4N47U	0.5	-	-	mA	$V_{CE} = 5 \text{ V}, I_B = 0, I_F = 1.0 \text{ mA } T_A = 25^\circ\text{C}$ $V_{CE} = 5 \text{ V}, I_B = 0, I_F = 2.0 \text{ mA } T_A = -55^\circ\text{C}$ $V_{CE} = 5 \text{ V}, I_B = 0, I_F = 2.0 \text{ mA } T_A = 100^\circ\text{C}$		
	0.7	-	-				
	0.5	-	-				
4N48U	1.0	-	5.0	mA	$V_{CE} = 5 \text{ V}, I_B = 0, I_F = 1.0 \text{ mA } T_A = 25^\circ\text{C}$ $V_{CE} = 5 \text{ V}, I_B = 0, I_F = 2.0 \text{ mA } T_A = -55^\circ\text{C}$ $V_{CE} = 5 \text{ V}, I_B = 0, I_F = 2.0 \text{ mA } T_A = 100^\circ\text{C}$		
	1.4	-	-				
	1.0	-	-				
4N49U	2.0	-	10.0	mA	$V_{CE} = 5 \text{ V}, I_B = 0, I_F = 1.0 \text{ mA } T_A = 25^\circ\text{C}$ $V_{CE} = 5 \text{ V}, I_B = 0, I_F = 2.0 \text{ mA } T_A = -55^\circ\text{C}$ $V_{CE} = 5 \text{ V}, I_B = 0, I_F = 2.0 \text{ mA } T_A = 100^\circ\text{C}$		
	2.8	-	-				
	2.0	-	-				
$V_{CE(SAT)}$	Collector Saturation Voltage	4N22U	-	-	0.3	V	$I_C = 2.5 \text{ mA}, I_B = 0, I_F = 20 \text{ mA}$ $I_C = 5.0 \text{ mA}, I_B = 0, I_F = 20 \text{ mA}$ $I_C = 10.0 \text{ mA}, I_B = 0, I_F = 20 \text{ mA}$
		4N23U	-	-	0.3		
		4N24U	-	-	0.3		
		4N47U	-	-	0.3	V	$I_C = 0.5 \text{ mA}, I_B = 0, I_F = 2.0 \text{ mA}$ $I_C = 1.0 \text{ mA}, I_B = 0, I_F = 2.0 \text{ mA}$ $I_C = 2.0 \text{ mA}, I_B = 0, I_F = 2.0 \text{ mA}$
		4N48U	-	-	0.3		
		4N49U	-	-	0.3		
$h_{FE}$	DC Current Gain	4N22U	200	-	-	-	$V_{CE} = 5 \text{ V}, I_C = 10 \text{ mA}, I_F = 0 \text{ mA}$
		4N23U	300	-	-		
		4N24U	400	-	-		
		4N47U	100	-	-		
		4N48U	100	-	-		
		4N49U	100	-	-		
$t_r$ & $t_f$	Rise and Fall Time	4N22U	-	-	15	$\mu\text{s}$	$V_{CC} = 10 \text{ V}, I_F = 10 \text{ mA}, R_L = 100\Omega,$ Pulse width = 100 ms, Duty cycle = 1%
		4N23U	-	-	15		
		4N24U	-	-	20		
		4N47U	-	-	20	$\mu\text{s}$	$V_{CC} = 10 \text{ V}, I_F = 5 \text{ mA}, R_L = 100\Omega,$ Pulse width = 100 ms, Duty cycle = 1%
		4N48U	-	-	20		
		4N49U	-	-	20		
$R_{IO}$	Resistance (Input to Output)		10 <sub>11</sub>	-	-	$\Omega$	$V_{IO} = \pm 1,000 \text{ Vdc}$
$C_{IO}$	Capacitance (Input to Output)		-	-	5.0	pF	$V_{IO} = 0 \text{ Vdc}, f = 1.0 \text{ MHz}$

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

**Surface Mount Optically Coupled Isolator**  
**4N22U, 4N23U, 4N24U (COTS, TX, TXV)**  
**4N47U, 4N48U, 4N49U (COTS, TX, TXV)**



**Electrical Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
<b>Coupled</b>						
$I_{C(ON)}$	On-State Collector Current					
	4N22, 4N22A (COTS, TX, TXV)	0.15	-	-		$I_F = 2.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0$
	4N22, 4N22A (COTS, TX, TXV)	2.50	-	-		$I_F = 10.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0$
	4N22, 4N22A (COTS, TX, TXV)	1.00	-	-		$I_F = 10.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0, T_A = -55^\circ\text{C}^{(1)}$
	4N22, 4N22A (COTS, TX, TXV)	1.00	-	-		$I_F = 10.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0, T_A = 100^\circ\text{C}^{(1)}$
	4N23, 4N23A (COTS, TX, TXV)	0.20	-	-		$I_F = 2.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0$
	4N23, 4N23A (COTS, TX, TXV)	6.00	-	-		$I_F = 10.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0$
	4N23, 4N23A (COTS, TX, TXV)	2.50	-	-		$I_F = 10.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0, T_A = -55^\circ\text{C}^{(1)}$
	4N23, 4N23A (COTS, TX, TXV)	2.50	-	-		$I_F = 10.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0, T_A = 100^\circ\text{C}^{(1)}$
	4N24, 4N24A (COTS, TX, TXV)	0.40	-	-		$I_F = 2.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0$
	4N24, 4N24A (COTS, TX, TXV)	10.0	-	-		$I_F = 10.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0$
	4N24, 4N24A (COTS, TX, TXV)	4.00	-	-		$I_F = 10.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0, T_A = -55^\circ\text{C}^{(1)}$
	4N24, 4N24A (COTS, TX, TXV)	4.00	-	-		$I_F = 10.0\text{ mA}, V_{CE} = 5\text{ V}, I_B = 0, T_A = 100^\circ\text{C}^{(1)}$
	4N47, 4N47A (COTS, TX, TXV)	0.50	-	-		$I_F = 1.0\text{ mA}, V_{CE} = 5.0\text{ V}, I_B = 0$
	4N47, 4N47A (COTS, TX, TXV)	0.70	-	-		$I_F = 2.0\text{ mA}, V_{CE} = 5.0\text{ V}, I_B = 0, T_A = -55^\circ\text{C}^{(1)}$
	4N47, 4N47A (COTS, TX, TXV)	0.50	-	-		$I_F = 2.0\text{ mA}, V_{CE} = 5.0\text{ V}, I_B = 0, T_A = 100^\circ\text{C}^{(1)}$
4N48, 4N48A (COTS, TX, TXV)	1.00	-	5		$I_F = 1.0\text{ mA}, V_{CE} = 5.0\text{ V}, I_B = 0$	
4N48, 4N48A (COTS, TX, TXV)	1.40	-	-		$I_F = 2.0\text{ mA}, V_{CE} = 5.0\text{ V}, I_B = 0, T_A = -55^\circ\text{C}^{(1)}$	
4N48, 4N48A (COTS, TX, TXV)	1.00	-	-		$I_F = 2.0\text{ mA}, V_{CE} = 5.0\text{ V}, I_B = 0, T_A = 100^\circ\text{C}^{(1)}$	
4N49, 4N49A (COTS, TX, TXV)	2.00	-	10		$I_F = 1.0\text{ mA}, V_{CE} = 5.0\text{ V}, I_B = 0$	
4N49, 4N49A (COTS, TX, TXV)	2.80	-	-		$I_F = 2.0\text{ mA}, V_{CE} = 5.0\text{ V}, I_B = 0, T_A = -55^\circ\text{C}^{(1)}$	
4N49, 4N49A (COTS, TX, TXV)	2.00	-	-		$I_F = 2.0\text{ mA}, V_{CE} = 5.0\text{ V}, I_B = 0, T_A = 100^\circ\text{C}^{(1)}$	
$I_{CB(ON)}$	On-State Collector Base 4N47, 4N48, 4N49 [A] (COTS, TX, TXV)	30	-	-	$\mu\text{A}$	$V_{CB} = 5\text{ V}, I_E = 0, I_F = 10\text{ mA}$
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage					
	4N22, 4N23, 4N24 [A] (COTS, TX, TXV)	-	-	0.30		$I_F = 20\text{ mA}, I_C = 2.5\text{ mA}, I_B = 0$
	4N22, 4N23, 4N24 [A] (COTS, TX, TXV)	-	-	0.30		$I_F = 20\text{ mA}, I_C = 5.0\text{ mA}, I_B = 0$
	4N22, 4N23, 4N24 [A] (COTS, TX, TXV)	-	-	0.30	$\text{V}$	$I_F = 20\text{ mA}, I_C = 10.0\text{ mA}, I_B = 0$
	4N47, 4N47A (COTS, TX, TXV)	-	-	0.30		$I_F = 2.0\text{ mA}, I_C = 0.5\text{ mA}, I_B = 0$
	4N48, 4N48A (COTS, TX, TXV)	-	-	0.30		$I_F = 2.0\text{ mA}, I_C = 1.0\text{ mA}, I_B = 0$
4N49, 4N49A (COTS, TX, TXV)	-	-	0.30		$I_F = 2.0\text{ mA}, I_C = 2.0\text{ mA}, I_B = 0$	
$H_{FE}$	DC Current Gain					
	4N22, 4N22A (COTS, TX, TXV)	200	-	-	$\text{V}$	$V_{CE} = 5.0\text{ V}, I_C = 10.0\text{ mA}, I_F = 0\text{ mA}$
	4N23, 4N23A (COTS, TX, TXV)	300	-	-		$V_{CE} = 5.0\text{ V}, I_C = 10.0\text{ mA}, I_F = 0\text{ mA}$
	4N24, 4N24A (COTS, TX, TXV)	400	-	-		$V_{CE} = 5.0\text{ V}, I_C = 10.0\text{ mA}, I_F = 0\text{ mA}$
4N47, 4N48, 4N49 [A] (COTS, TX, TXV)	100	-	-		$V_{CE} = 5.0\text{ V}, I_C = 10.0\text{ mA}, I_F = 0\text{ mA}$	
$R_{IO}$	Resistance (Input-to-Output)					
	4N22, 4N23, 4N24 [A] (COTS, TX, TXV)	$10^{11}$	-	-	$\Omega$	$V_{IO} = \pm 1.0\text{ VDC}^{(3)}$
4N47, 4N48, 4N49 [A] (COTS, TX, TXV)	$10^{11}$	-	-		$V_{I-O} = \pm 1000\text{ VDC}^{(3)}$	
$C_{IO}$	Capacitance (Input-to-Output)	-	-	5	$\text{pF}$	$V_{I-O} = 0\text{ V}, f = 1.0\text{ MHz}^{(3)}$

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)