# DBD10G

# ON Semiconductor®

http://onsemi.com


# 1.0A Single-Phase Bridge Rectifier

## **Features**

· Plastic molded structure

• Peak reverse voltage: VRM=600V • Average output current : IO=1.0A

# **Electrical Connection**



# **Specifications**

# **Absolute Maximum Ratings** at Ta=25°C

| Parameter              | Symbol          | Conditions             | Value       | Unit |
|------------------------|-----------------|------------------------|-------------|------|
| Peak Reverse Voltage   | V <sub>RM</sub> |                        | 600         | V    |
| Average Output Current | I <sub>O</sub>  | Ta=25°C                | 1.0         | Α    |
| Surge Forward Current  | IFSM            | 50Hz sine wave, 1cycle | 30          | Α    |
| Junction Temperature   | Tj              |                        | 150         | °C   |
| Storage Temperature    | Tstg            |                        | -40 to +150 | °C   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

## Electrical Characteristics at Ta=25°C


| Parameter          | Symbol   | Conditions                      | Value |     |      | Lloit  |
|--------------------|----------|---------------------------------|-------|-----|------|--------|
|                    |          |                                 | min   | typ | max  | Unit   |
| Forward Voltage    | VF       | I <sub>F</sub> =0.5A            |       |     | 1.05 | V      |
| Reverse Current    | IR       | V <sub>R</sub> =V <sub>RM</sub> |       |     | 10   | μΑ     |
| Thremal Resistance | Rth(j-l) | Junction-Lead                   |       |     | 15   | °C / W |
| Thremal Resistance | Rth(j-a) | Junction-Ambient                |       |     | 68   | °C / W |


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

## **Package Dimensions**

unit:mm(typ.)


Surface mount type (TM emboss taping)

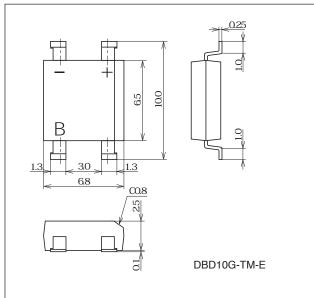

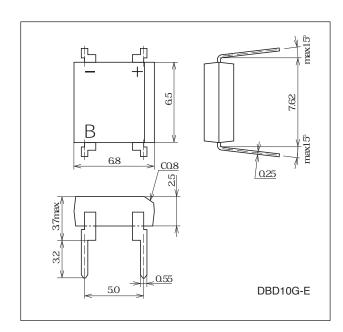

### ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

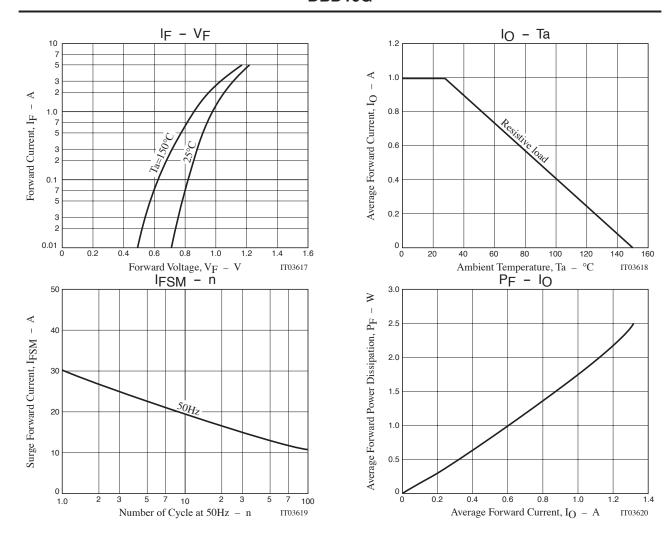

### **Ordering Information**

| Device      | Shipping          | memo    |
|-------------|-------------------|---------|
| DBD10G-TM-E | 1,000 pcs. / reel | Pb-Free |
| DBD10G-E    | 70 pcs. / fnfld   | Pb-Free |

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equa

# AMEYA360 Components Supply Platform

# **Authorized Distribution Brand:**

























# Website:

Welcome to visit www.ameya360.com

# Contact Us:

# > Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

# > Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

# Customer Service :

Email service@ameya360.com

# Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com