


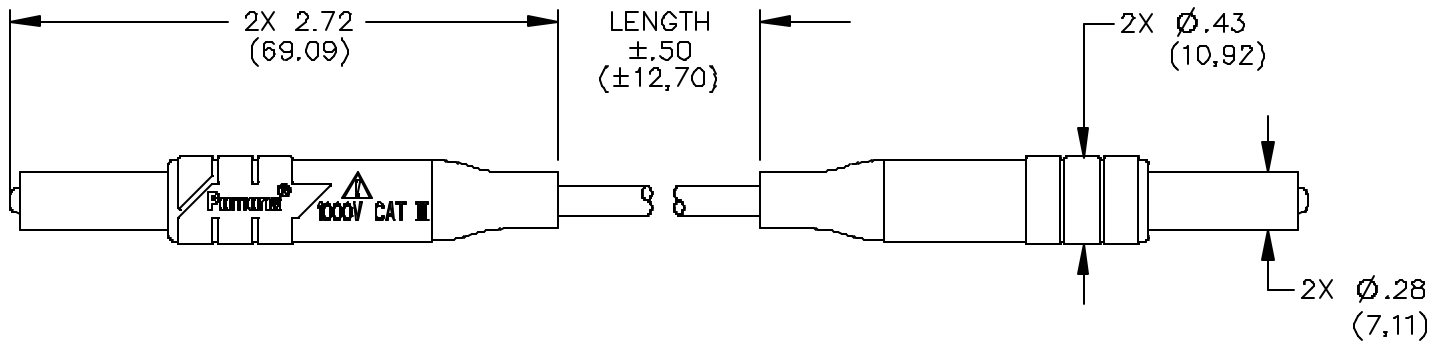

MATERIALS:

Retractable Sheath Banana Plug:

Plug Body: Tellurium Copper, Gold Plated.

Banana Spring: Beryllium Copper, Gold Plated

Compression Spring: Stainless Steel

Tip: Nylon, Color Matches Color of Wire

Insulation: Nylon Molded to the Plug and Wire. Color Matches Color or Wire.

Wire: 12 AWG, Stranding 7 x 38/36 Bare Copper, PVC Insulated, .144 (3,66mm) O.D.

Marking: POMONA 5291A-XX

RATINGS:

Operating Temperature: +55° C (+131° F) Max.

Operating Voltage: 1000V per IEC1010-2-031

Current: 7 Amperes

ORDERING INFORMATION: Model 5291A-XX-*

XX = Wire Length, Standard Lengths: 12" (30,48cm), 36" (91,44cm) & 60" (152,4cm). Additional lengths can be quoted upon request.

* = Color, -0 Black, -2 Red

Ordering Example: 5291A-12-2 Patch Cord is 12" (30,48cm), Color is red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com