

SMD Oscillators- CMOS Output 2.5 x 2.0 x 0.8 mm AW Series

Features


- Ultra Small SMD seam sealed clock crystal oscillator units.
- Tri-state function available.
- RoHS Compliant / Pb Free




Electrical Specifications

Item / Type	AW
Output Type	CMOS
Output Load	15 pF, 30 pF
Oscillation Mode	Fundamental
Supply Voltage	1.8 V, 2.5 V, 3.3 V
Frequency Range	4 ~ 54 MHz
Frequency Stability	± 50 ppm
Operating Temperature Range	- 40 ~ + 85 °C
Storage Temperature Range	- 55 ~ + 125 °C
Voltage Vol (Max.) / Voh (Min.)	0.1 VDD / 0.9 VDD
Rise (Tr) / Fall (Tf) Time	8 ns Max.
Supply Current	15 mA Max.
Symmetry	45 ~ 55 %
Start-up Time	5 ms Max.
Phase Jitter (12 KHz ~ 20 MHz)	2 ps Max.
Aging (at 25 °C)	± 3 ppm / year Max.
Reliability Standard	AEC-Q100

Dimensions

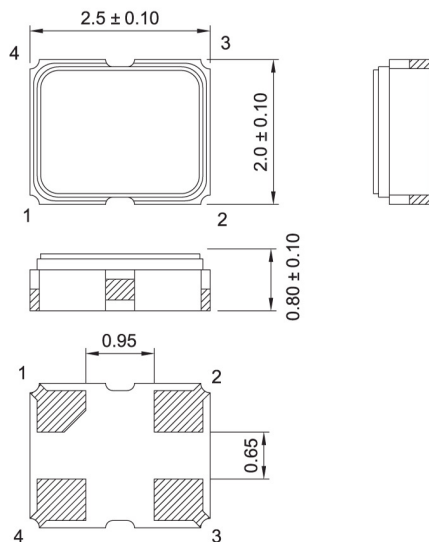

PAD FUNCTION:
1: ENABLE CONTROL
2: GND
3: OUT
4: VDD



Units: mm

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com