


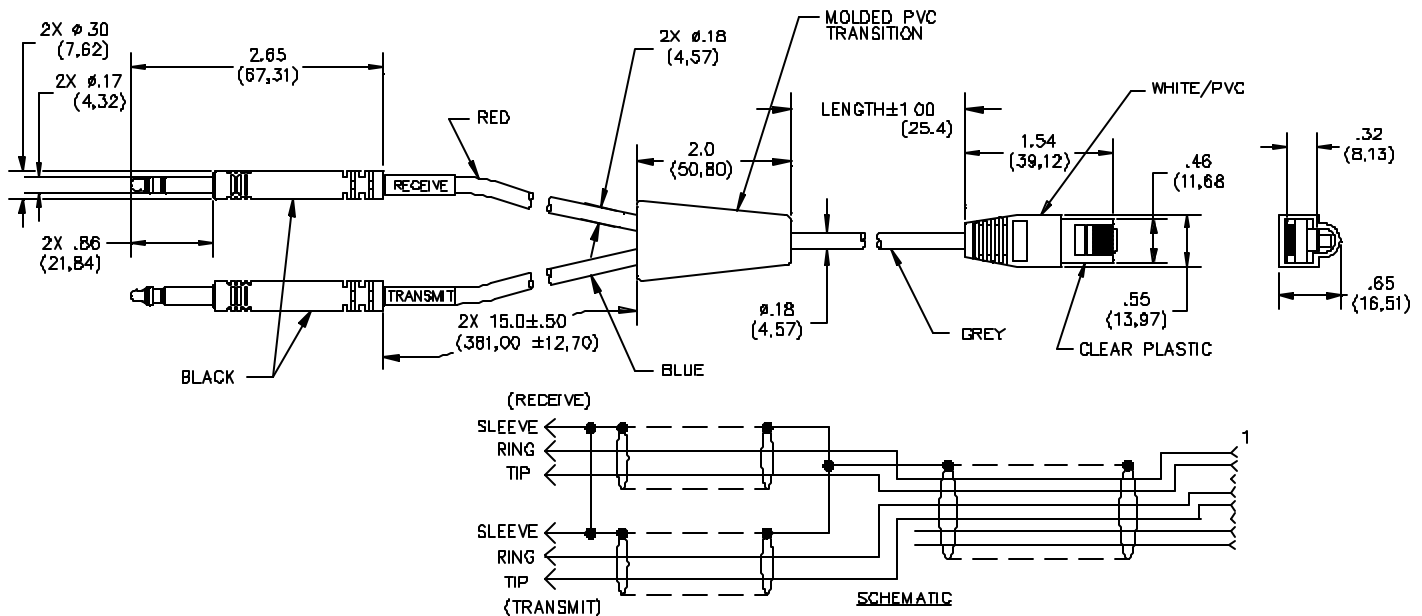

FEATURES:

- Shielded cable to reduce noise.
- Bantam Plugs molded to the cable to provide optimum durability

MATERIALS:

Plugs – Nickel plated brass

Cable – 4 Conductor shielded twisted pair, breakout cables

2 Conductor shielded twisted pair, PVC jackets and insulators

Transition – Molded PVC

RATINGS:

Operating Temperature: -20°C to +80°C

Operating Voltage: 300 VRMS Max.

Current: 0.5 Amperes per conductor @25°C Max.

ORDERING INFORMATION: Model 6320-96

Standard Length – 96 Inches (2134 mm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com