

HEYCO

**NO O-RING
REQUIRED!**


Heyco® -Tite Liquid Tight Cordgrips

Straight-Thru, Metric Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection

CABLE DIA. RANGE				PART NO.		DESCRIPTION	UL or IEC	PART DIMENSIONS									
Minimum		Maximum		Black	Gray			A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Flat Size	
in.	mm.	in.	mm.					in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
.065	1,7	.210	5,3	M4330	M4331	RLTCG M12	UL	.473	12,0	1.16	29,5	.32	8,1	.21	5,3	.63	16,0
.115	2,9	.250	6,4	M4332	M4333	LTCG M12											
.065	1,7	.230	5,8	M4334	M4335	RLTCG M16		.630	16,0	1.25	31,8	.32	8,1	.21	5,3	.83	21,1
.105	2,7	.315	8,0	M4336	M4337	LTCG M16											
.095	2,4	.290	7,4	M4338	M4339	RLTCG M20	UL	.787	20,0	1.49	37,8	.41	10,4	.21	5,3	.98	24,9
.170	4,3	.450	11,4	M4340	M4341	LTCG M20											
.260	6,6	.545	13,8	M3198	M3199	LTCG LL M20	UL	.787	20,0	1.65	41,9	.41	10,4	.21	5,3	.98	24,9
.250	6,4	.490	12,4	M4342	M4343	RLTCG M25	UL	.985	25,0	1.89	48,0	.52	13,2	.25	6,4	1.30	33,0
.435	11,0	.705	17,9	M4344	M4345	LTCG M25											
.490	12,4	.785	19,9	M4346	M4347	RLTCG M32	UL	1.260	32,0	2.23	56,6	.58	14,7	.30	7,6	1.73	43,9
.590	15,0	1.000	25,4	M4348	M4349	LTCG M32											
.787	20,0	1.020	26,0	M4350	M4351	RLTCG M40	UL	1.575	40,0	2.39	60,7	.48	12,2	.30	7,6	2.05	52,7
.865	22,0	1.260	32,0	M4352	M4353	LTCG M40											
1.000	25,4	1.240	31,5	M3302	M3303	RLTCG M50	UL	1.970	50,0	2.50	63,5	.48	12,2	.36	9,1	2.50	63,5
1.230	31,2	1.560	39,6	M3300	M3301	LTCG M50											
1.160	29,5	1.350	34,3	M3306	M3307	RLTCG M63	UL	2.480	63,0	2.63	66,7	.50	12,7	.42	10,7	2.75	69,9
1.450	36,8	1.560	39,6	M3304	M3305	LTCG M63											

Standard colors black and gray.

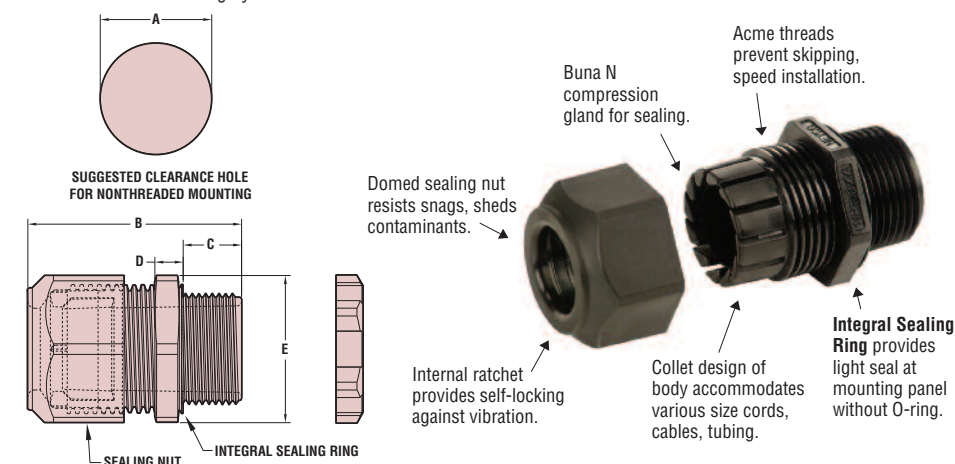

Material Certifications

- UL** Nylon 6/6 with Buna N or TPE Sealing Gland
- UL** Listed under Underwriters' Laboratories File E51579
- UL** Recognized under the Component Program of Underwriters' Laboratories File E51579
- CSA** Certified by Canadian Standards Association File 93876C
- NEMA** Approved for NEMA 6 and 6P Applications
- UL** Marks License #136681
- CE** Per EC Low Voltage Directive 73/23/EEC

Flammability Rating Temperature Rating

94V-2
Static -40°F (-40°C) to 239°F (115°C)
Dynamic -4°F (-20°C) to 212°F (100°C)

IP Rating

IP 68 (70 PSI, 5 BAR)



- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable. **NEW!**
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to 1.560" (39,6 mm).
- We recommend using the cordgrip with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-43.
- Consult Heyco for cordgrips molded in other colors.

*Quick
Specs*

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com