


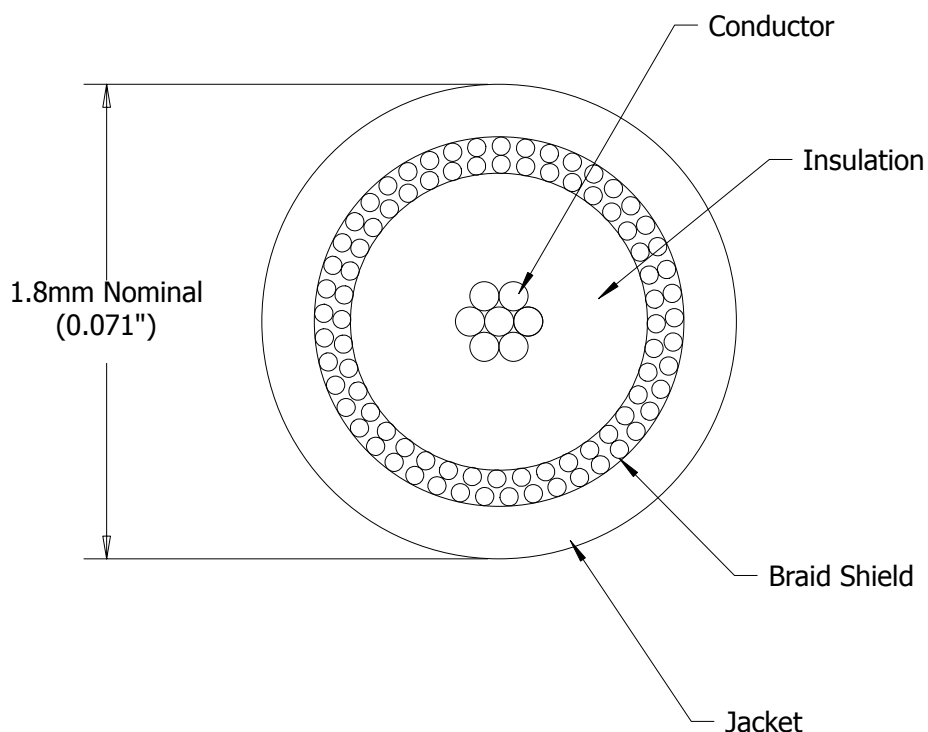

NOTES

Conductor: 30 AWG, 7/38, Silver Plated Copper

Insulation: FEP, 0.0345" (0.88mm) Diameter

Braid Shield: 42 AWG, Silver Plated Copper, >95% Coverage

Jacket: FEP

Color: Black

Impedance: 50+/-2 Ohms

Capacitance: 30 pF/ft Nominal

Velocity of Propagation: 70%

This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	X1	3073	Preliminary Release.	KP	9/26/12
	X2	3135	Adjust Core OD.	KP	11/12/12

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com