
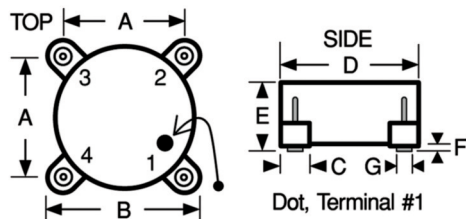


SERIES**4448R
4448****Surface Mount High Current Power Toroids****SCHEMATIC**

Actual Size



Test Methods Solderability per MIL-STD-202, Method 208. Inductance tested at 10 kHz and zero Amp DC. Tested at 25°C

Mechanical Configuration A flat top surface mount case with excellent coplanarity of terminals.

Physical Parameters

	Inches	Millimeters
A	0.390 to 0.410	9.91 to 10.41
B	0.520 to 0.540	13.21 to 13.71
C	0.115 to 0.135	2.92 to 3.43
D	0.480 to 0.500	12.19 to 12.70
E	0.310 Max.	7.87 Max.
F	0.020 to 0.040	0.51 to 1.02
G	0.060 (Ref. only)	1.52 (Ref. only)

Electrical Configuration Two inductors per unit; internal terminals: #1(start) – #2(finish) & #4(start) – #3(finish).

Series Externally connect #2 to #4.

Parallel Externally connect #1 to #4 and #2 to #3.

Operating Temperature Range –55°C to +125°C

Rated DC Current Based upon 20°C temperature rise from 25°C ambient.

Maximum Power Dissipation at 25°C 0.313 Watts

Inductance Tolerance Tolerance is specified by suffixing an alpha character to the part number as follows: K = 10%, L = 15%, M = 20%. Units are normally supplied to the tolerance indicated in the tables.

Marking Delevan; inductance and tolerance. A white dot indicates the location of pin 1.

Example: 4448-102M
DELEVAN
.47uH±20%

Weight (Grams) 2.5 (Ref.)

Inductance at Rated DC Current Minimum percent of measured zero Amp DC Inductance.
-02M to -34L = 60%; -102M to 134L = 50%

Packaging Tape & reel (24mm):


13" reel, 350 pieces max.; 7" reel not available

DASH NUMBER*	0 AMPS DC PARALLEL INDUCTANCE (μH)	RATED PARALLEL DC CURRENT MAXIMUM	TOLERANCE	PARALLEL DC RESISTANCE MAXIMUM (OHMS)	0 AMPS DC SERIES INDUCTANCE (μH)	RATED MAXIMUM DC SERIES CURRENT MAXIMUM (AMPS)	TOLERANCE	SERIES DC RESISTANCE MAXIMUM (OHMS)	RATED SERIES DC CURRENT MAXIMUM (AMPS)
SERIES 4448 POWDERED IRON CORE									
-02M	0.47 ± 20%	7.90	0.005	2.00 ± 20%	3.95	0.020			
-04M	0.68 ± 20%	7.20	0.006	3.00 ± 20%	3.60	0.024			
-06M	1.00 ± 20%	5.90	0.009	4.00 ± 20%	2.95	0.036			
-08M	2.00 ± 20%	4.60	0.014	8.00 ± 20%	2.30	0.056			
-10M	5.00 ± 20%	3.30	0.027	20.0 ± 20%	1.65	0.108			
-12M	8.00 ± 20%	3.00	0.033	32.0 ± 20%	1.50	0.132			
-14L	10.0 ± 15%	2.50	0.047	40.0 ± 15%	1.25	0.188			
-16L	15.0 ± 15%	2.30	0.057	60.0 ± 15%	1.15	0.228			
-18L	20.0 ± 15%	1.90	0.085	80.0 ± 15%	0.95	0.340			
-20L	25.0 ± 15%	1.60	0.116	100 ± 15%	0.80	0.464			
-22L	33.0 ± 15%	1.30	0.166	132 ± 15%	0.65	0.664			
-24L	50.0 ± 15%	1.20	0.202	200 ± 15%	0.60	0.808			
-26L	68.0 ± 15%	1.10	0.238	272 ± 15%	0.55	0.952			
-28L	100 ± 15%	0.72	0.565	400 ± 15%	0.36	2.260			
-30L	150 ± 15%	0.64	0.696	600 ± 15%	0.32	2.784			
-32L	200 ± 15%	0.60	0.810	800 ± 15%	0.30	3.240			
-34L	300 ± 15%	0.54	1.003	1200 ± 15%	0.27	4.012			

SERIES 4448 FERROUS ALLOY CORE									
-102M	0.47 ± 20%	7.90	0.004	2.00 ± 20%	3.95	0.016			
-104M	0.68 ± 20%	7.00	0.005	3.00 ± 20%	3.50	0.020			
-106M	1.00 ± 20%	6.50	0.006	4.00 ± 20%	3.25	0.024			
-108M	2.00 ± 20%	5.90	0.007	8.00 ± 20%	2.95	0.028			
-110M	5.00 ± 20%	4.40	0.014	20.0 ± 20%	2.20	0.056			
-112M	8.00 ± 20%	3.50	0.019	32.0 ± 20%	1.75	0.076			
-114L	10.0 ± 15%	3.40	0.020	40.0 ± 15%	1.70	0.080			
-116L	15.0 ± 15%	3.00	0.024	60.0 ± 15%	1.50	0.096			
-118L	20.0 ± 15%	2.10	0.055	80.0 ± 15%	1.05	0.220			
-120L	25.0 ± 15%	2.00	0.064	100 ± 15%	1.00	0.254			
-122L	33.0 ± 15%	1.80	0.072	132 ± 15%	0.90	0.288			
-124L	50.0 ± 15%	1.50	0.111	200 ± 15%	0.75	0.444			
-126L	68.0 ± 15%	1.20	0.158	272 ± 15%	0.60	0.632			
-128L	100 ± 15%	0.92	0.303	400 ± 15%	0.46	1.212			
-130L	150 ± 15%	0.82	0.372	600 ± 15%	0.41	1.488			
-132L	200 ± 15%	0.64	0.545	800 ± 15%	0.32	2.180			
-134L	300 ± 15%	0.62	0.672	1200 ± 15%	0.31	2.688			

*Complete part # must include series # PLUS the dash #

For surface finish information, refer to www.delevanfinishes.com

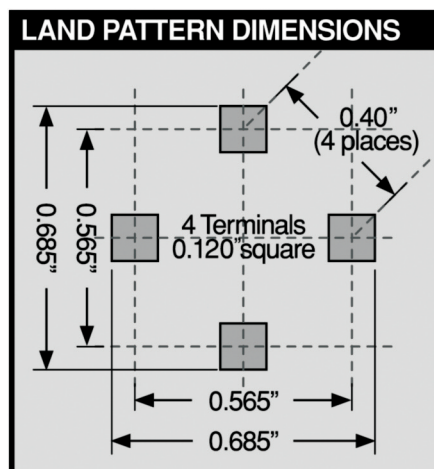

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com