


Models 72915
2mm Sheathed Jack to 2mm Unsheathed Plug Adapter

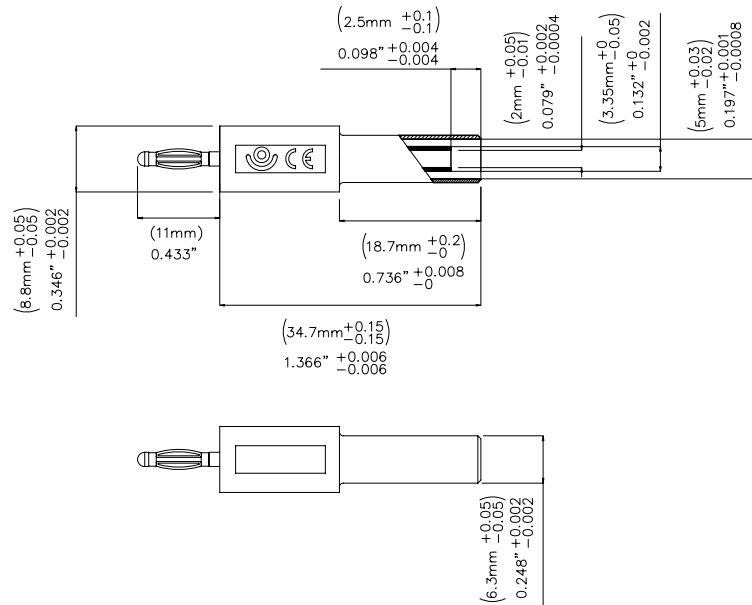

Features

- 2mm sheathed jack to 2mm unsheathed plug adapter.
- Accepts 2mm safety-sheathed banana plugs

Materials

- Insulation: Polyamide
- Plug body: Nickel plated Brass
- Contact Spring: Nickel plated Beryllium copper.
-

Ordering Information

Model: 72915-Color Sold in packages of 10 pieces
Available colors: Black (-0) or Red (-2)

Specifications

Max Current	Max. 10A
Max Voltage	33 V AC / 70 V DC
Temperature	-20° C + 80° C
Max Resistance	Less than 0 .8 mΩ

Rating: *hands free testing* in controlled environment: 70Vrms max. For CE compliance: Not intended for hand-held use at voltages above 33Vrms/70Vdc

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com