


HiPerFRED²

$$\begin{aligned} V_{RRM} &= 300\text{ V} \\ I_{FAV} &= 2 \times 30\text{ A} \\ t_{rr} &= 35\text{ ns} \end{aligned}$$


High Performance Fast Recovery Diode
Low Loss and Soft Recovery
Common Cathode

Part number

DPG60C300PC



Backside: cathode



Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{rm} -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{rm} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)


Package: TO-263 (D2Pak)

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Fast Diode				Ratings				
Symbol	Definition	Conditions		min.	typ.	max.	Unit	
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				300	V	
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				300	V	
I _R	reverse current, drain current	V _R = 300 V	T _{VJ} = 25°C			1	μA	
		V _R = 300 V	T _{VJ} = 150°C			0.1	mA	
V _F	forward voltage drop	I _F = 30 A	T _{VJ} = 25°C			1.35	V	
		I _F = 60 A				1.66	V	
		I _F = 30 A	T _{VJ} = 150°C			1.08	V	
		I _F = 60 A				1.43	V	
I _{FAV}	average forward current	T _C = 140°C	T _{VJ} = 175°C			30	A	
		rectangular d = 0.5						
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 175°C		0.70	V	
r _F	slope resistance					11.1	mΩ	
R _{thJC}	thermal resistance junction to case					0.85	K/W	
R _{thCH}	thermal resistance case to heatsink				0.25		K/W	
P _{tot}	total power dissipation	T _C = 25°C				175	W	
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; V _R = 0 V		T _{VJ} = 45°C		360	A	
C _J	junction capacitance	V _R = 150 V f = 1 MHz		T _{VJ} = 25°C	42		pF	
I _{RM}	max. reverse recovery current	} I _F = 30 A; V _R = 200 V -di _F /dt = 200 A/μs		T _{VJ} = 25°C	3		A	
				T _{VJ} = 125°C	7		A	
t _{rr}	reverse recovery time			T _{VJ} = 25°C	35		ns	
				T _{VJ} = 125°C	55		ns	

Package TO-263 (D2Pak)			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			35	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				2		g
F_c	mounting force with clip		20		60	N

Product Marking

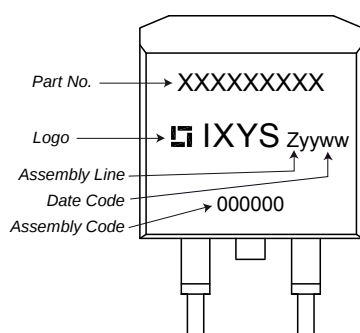

Part number

D = Diode
 P = HiPerFRED
 G = extreme fast
 60 = Current Rating [A]
 C = Common Cathode
 300 = Reverse Voltage [V]
 PC = TO-263AB (D2Pak) (2)


Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DPG60C300PC	DPG60C300PC	Tape & Reel	800	503494

Similar Part	Package	Voltage class
DPG60C300HB	TO-247AD (3)	300
DPG60C300QB	TO-3P (3)	300
DPG60C300HJ	ISOPLUS247 (3)	300
DPF60C300HB	TO-247AD (3)	300
DPG80C300HB	TO-247AD (3)	300


Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 175^\circ\text{C}$

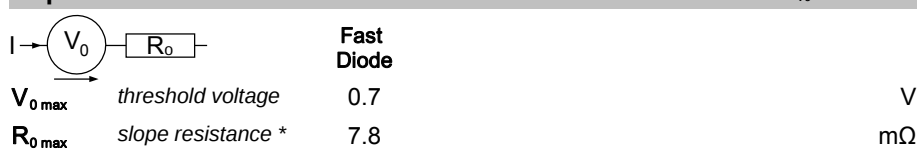


Outlines TO-263 (D2Pak)

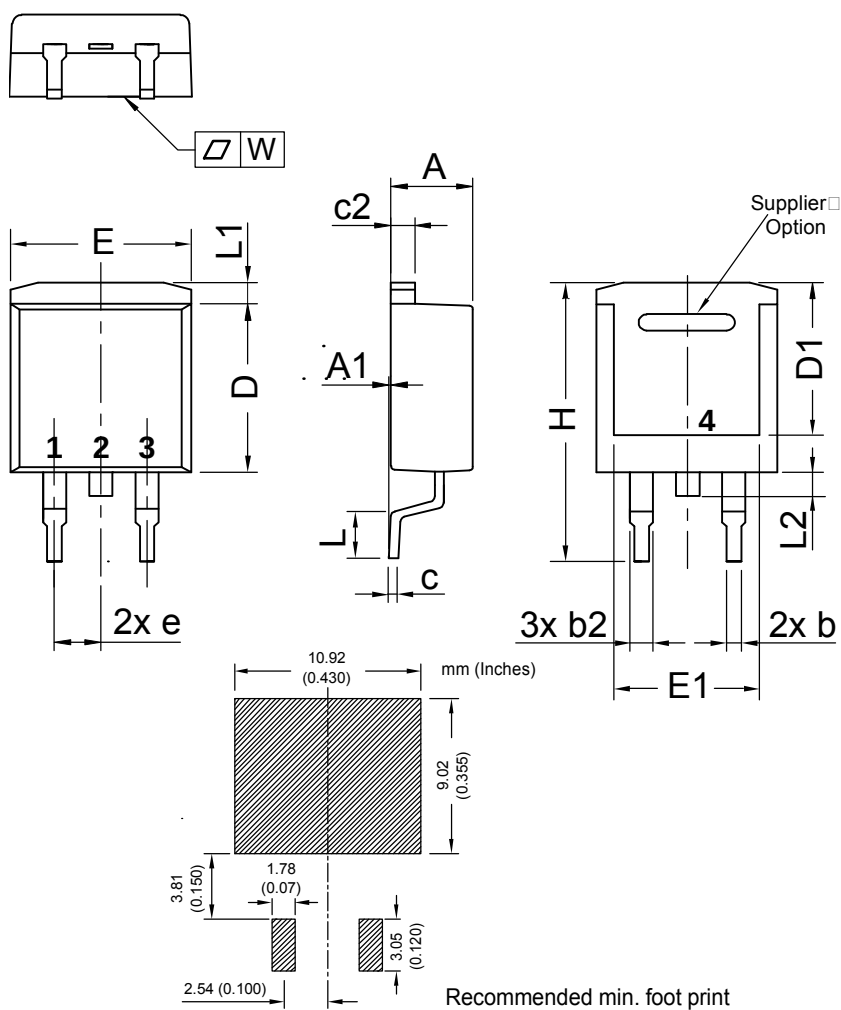

Dim.	Millimeter		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ. 0.10		typ. 0.004	
A2	2.41		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.5		0.098	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2.54 BSC		0.100 BSC	
e1	4.28		0.169	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	1.02	1.68	0.040	0.066
W	typ. 0.02	0.040	typ. 0.0008	0.002

All dimensions conform with and/or within JEDEC standard.



Fast Diode

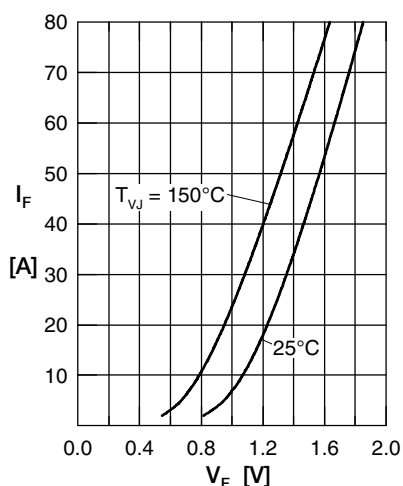


Fig. 1 Forward current I_F versus V_F

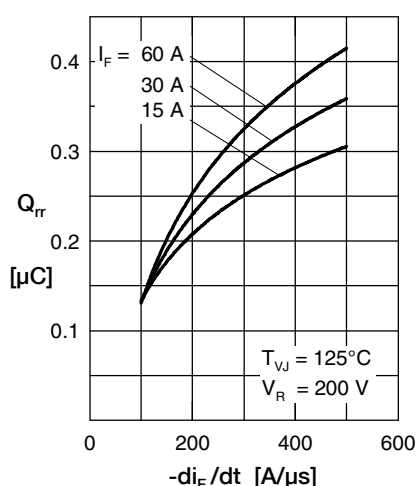


Fig. 2 Typ. reverse recov. charge Q_{rr} versus $-di_F/dt$

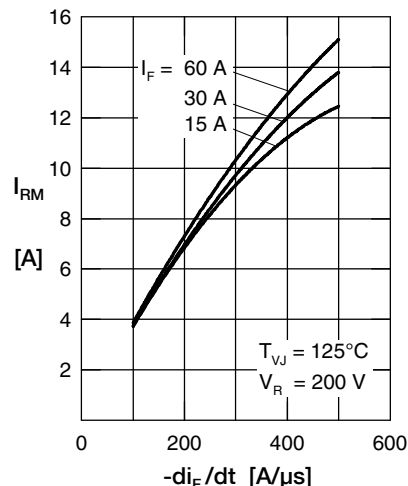


Fig. 3 Typ. reverse recov. current I_{RM} versus $-di_F/dt$

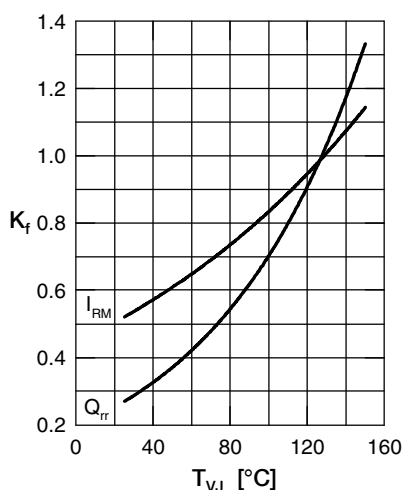


Fig. 4 Typ. dynamic parameters Q_{rr} , I_{RM} versus T_{VJ}

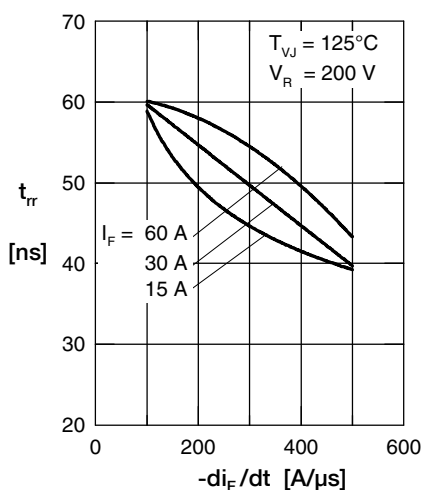


Fig. 5 Typ. reverse recov. time t_{rr} versus $-di_F/dt$

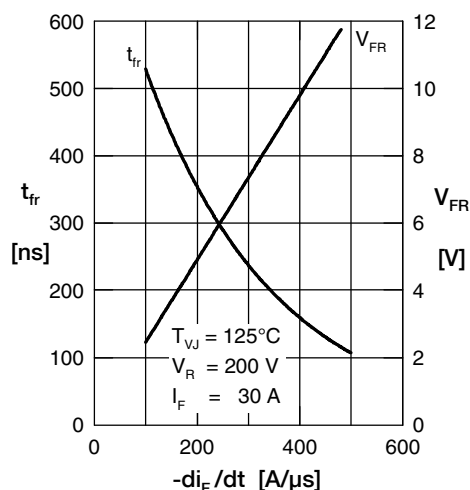


Fig. 6 Typ. forward recov. voltage V_{FR} & t_{fr} versus di_F/dt

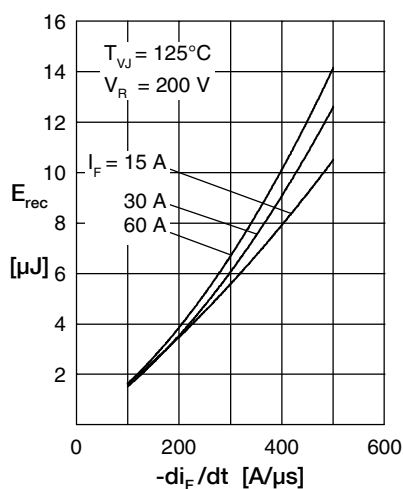


Fig. 7 Typ. recovery energy E_{rec} versus $-di_F/dt$

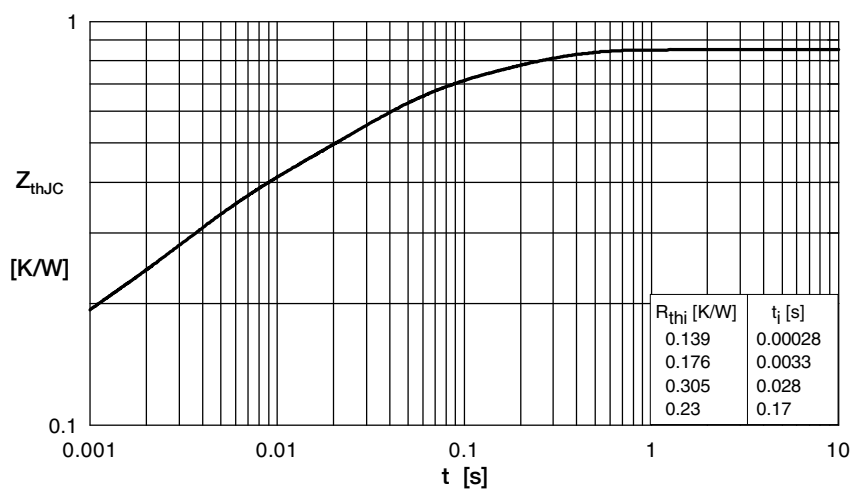


Fig. 8 Transient thermal impedance junction to case

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com