


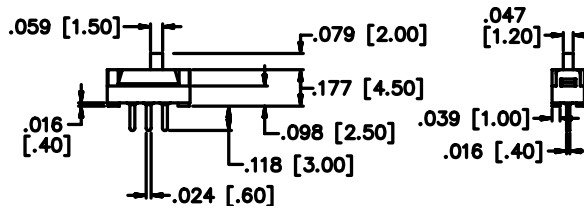




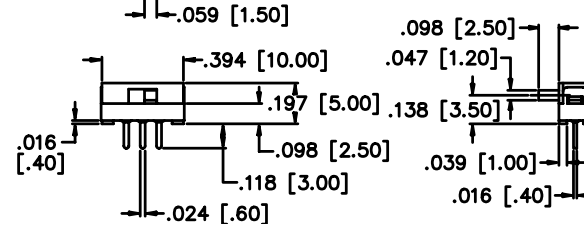





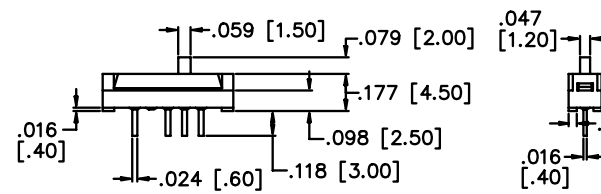



MJS Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE











SPECIFICATIONS	FEATURES
Contact rating: 100 mA at 12 VDC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 volts RMS at sea level Electrical life: 10,000 cycles min. Operating temperature range: -10°C to +60°C Actuation force: 225g (average) Solder heat resistance: 260°C max. for 5 seconds Washing not recommended	- Molded-in terminals minimize flux or solder entry. - Molded-in high temperature phenolic base. - Low Profile. - Bifurcated wiping contact design.
	MATERIALS
	Contacts & terminals: Silver plated Case & actuator: Thermoplastic Terminal seal: Molded-in

MODEL NO. MJS12	1P2T	 .079 (2.00) TRAVEL/THROW .402 [10.20] .157 [4.00]	 .157 [4.00] .079 [2.00] TYP. .039 [1.00] DIA., 4 PLCS.
 VERTICAL ACTUATOR	 ● = COMMON	 .059 [1.50] .079 [2.00] .047 [1.20] .177 [4.50] .098 [2.50] .118 [3.00] .024 [.60] .016 [.40] .039 [1.00] .016 [.40]	 .157 [4.00] .079 [2.00] TYP. .039 [1.00] DIA., 4 PLCS.
MODEL NO. MJS12R	1P2T	 .079 (2.00) TRAVEL/THROW .402 [10.20] .157 [4.00]	 .157 [4.00] .079 [2.00] .039 [1.00] DIA., 4 PLCS.
 RIGHT ANGLE ACTUATOR	 ● = COMMON	 .059 [1.50] .098 [2.50] .047 [1.20] .197 [5.00] .138 [3.50] .098 [2.50] .118 [3.00] .024 [.60] .016 [.40] .039 [1.00] .016 [.40]	 .157 [4.00] .079 [2.00] .039 [1.00] DIA., 4 PLCS.
MODEL NO. MJS13	1P3T	 .079 (2.00) TRAVEL/THROW 15.80 [.622] .157 [4.00]	 .039 [.60] DIA., 4 PLCS. .315 [8.00] .157 [4.00] .079 [2.00] TYP. .039 [1.00]
 VERTICAL ACTUATOR	 ● = COMMON	 .059 [1.50] .079 [2.00] .047 [1.20] .177 [4.50] .098 [2.50] .118 [3.00] .024 [.60] .016 [.40] .039 [1.00] .016 [.40]	 .039 [.60] DIA., 4 PLCS. .315 [8.00] .157 [4.00] .079 [2.00] TYP. .039 [1.00]

MJS Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

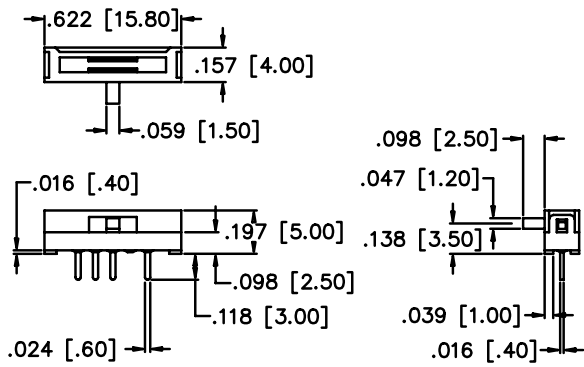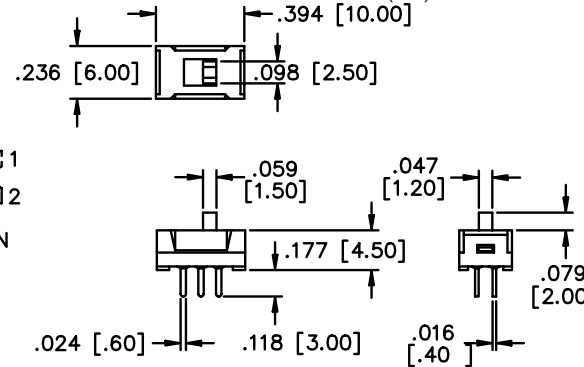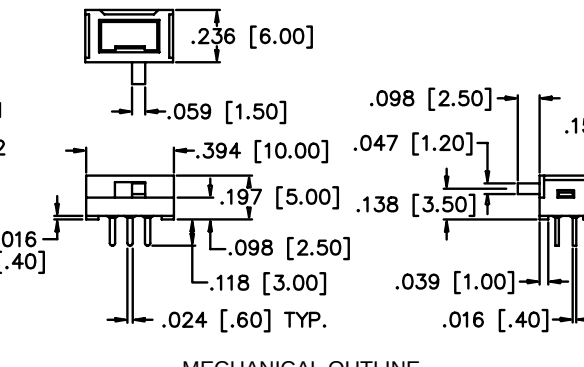MODEL NO. MJS13R  RIGHT ANGLE ACTUATOR	.079 (2.00) TRAVEL/THROW 1P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. MJS22  VERTICAL ACTUATOR	.079 (2.00) TRAVEL/THROW 2P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. MJS22R  RIGHT ANGLE ACTUATOR	.079 (2.00) TRAVEL/THROW 2P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com