



HiPerFET™ Power MOSFET

Phaseleg Topology
in ISOPLUS i4-PAC™

$$\begin{aligned} I_{D25} &= 75 \text{ A} \\ V_{DSS} &= 100 \text{ V} \\ R_{DSon typ.} &= 18 \text{ m}\Omega \end{aligned}$$

Preliminary data

**MOSFET T1/T2**

Symbol	Conditions	Maximum Ratings	
V_{DSS}	$T_{VJ} = 25^{\circ}\text{C to } 150^{\circ}\text{C}$	100	V
V_{GS}		± 20	V
I_{D25}	$T_C = 25^{\circ}\text{C}$	75	A
I_{D90}	$T_C = 90^{\circ}\text{C}$	50	A
I_{F25}	(body diode) $T_C = 25^{\circ}\text{C}$	100	A
I_{F90}	(body diode) $T_C = 90^{\circ}\text{C}$	60	A
dv/dt	$V_{DS} < V_{DSS}; I_F \leq 300\text{A}; di_F/dt \leq 100\text{A}/\mu\text{s}; R_G = 2 \Omega$ $T_{VJ} = 150^{\circ}\text{C}$	5	V/ns
E_{AR}	$T_C = 25^{\circ}\text{C}$	30	mJ

Symbol	Conditions	Characteristic Values ($T_{VJ} = 25^{\circ}\text{C}$, unless otherwise specified)		
		min.	typ.	max.
R_{DSon}	$V_{GS} = 10 \text{ V}; I_D = I_{D90}$		18	25 m Ω
V_{GSth}	$V_{DS} = 20 \text{ V}; I_D = 4 \text{ mA}$	2		4 V
I_{DSS}	$V_{DS} = V_{DSS}; V_{GS} = 0 \text{ V}; T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		0.25	0.3 mA
I_{GSS}	$V_{GS} = \pm 20 \text{ V}; V_{DS} = 0 \text{ V}$			200 nA
Q_g	$V_{GS} = 10 \text{ V}; V_{DS} = 0.5 \cdot V_{DSS}; I_D = I_{D90}$		180	nC
Q_{gs}			35	nC
Q_{gd}			85	nC
$t_{d(on)}$	$V_{GS} = 10 \text{ V}; V_{DS} = 0.5 \cdot V_{DSS}$ $I_D = I_{D90}; R_G = 2 \Omega$		20	ns
t_r			60	ns
$t_{d(off)}$			80	ns
t_f			60	ns
V_F	(body diode) $I_F = 75 \text{ A}; V_{GS} = 0 \text{ V}$		1.2	1.5 V
t_{rr}	(body diode) $I_F = 37.5\text{A}; -di/dt = 100\text{A}/\mu\text{s}; V_{DS} = 25\text{V}$		300	ns
R_{thJC}	with heat transfer paste			0.5 K/W
R_{thJH}			0.93	K/W

Features

- HiPerFET™ technology
 - low R_{DSon}
 - low gate charge for high frequency operation
 - unclamped inductive switching (UIS) capability
 - dv/dt ruggedness
 - fast intrinsic reverse diode
- ISOPLUS i4-PAC™ package
 - isolated back surface
 - low coupling capacity between pins and heatsink
 - enlarged creepage towards heatsink
 - application friendly pinout
 - low inductive current path
 - high reliability
 - industry standard outline
 - UL registered E 72873

Applications

- drives and power supplies
- battery or fuel cell powered
- automotive, industrial vehicle etc.
- secondary side of mains power supplies


IXYS reserves the right to change limits, test conditions and dimensions.

© 2004 IXYS All rights reserved

Component

Symbol	Conditions	Maximum Ratings	
T_{VJ}		-55...+175	°C
T_{stg}		-55...+125	°C
V_{ISOL}	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$	2500	V~
F_c	mounting force with clip	20...120	N

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
C_p	coupling capacity between shorted pins and mounting tab in the case		40	pF
d_s, d_A	pin - pin	1.7		mm
d_s, d_A	pin - backside metal	5.5		mm
Weight			9	g

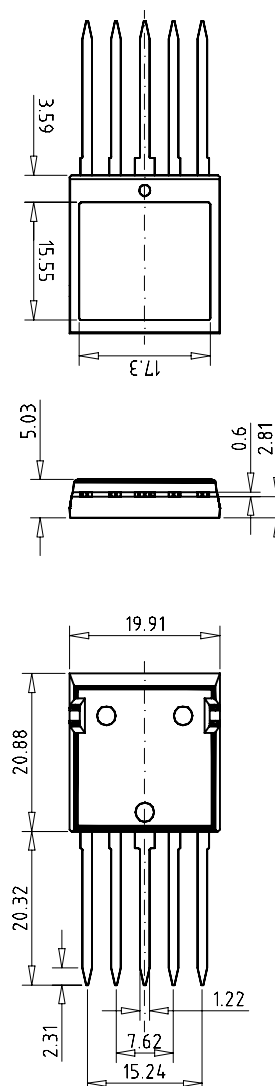Dimensions in mm (1 mm = 0.0394")


AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com