



DATE	DESCRIPTION	REV.
5.31.11	CHANGE AS PER ECN 11-073	A

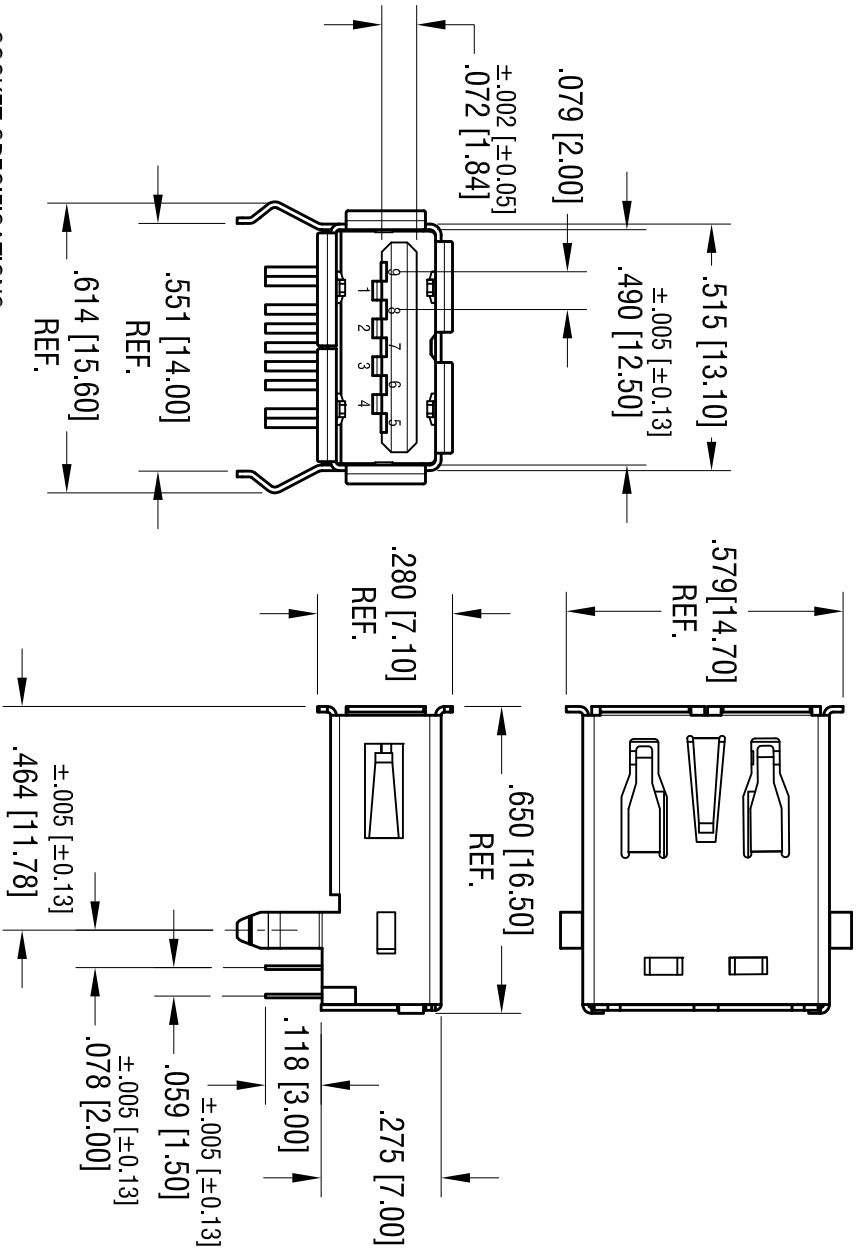

RECEPTACLE FOOTPRINT

TOLERANCE ±.002 [±0.05]

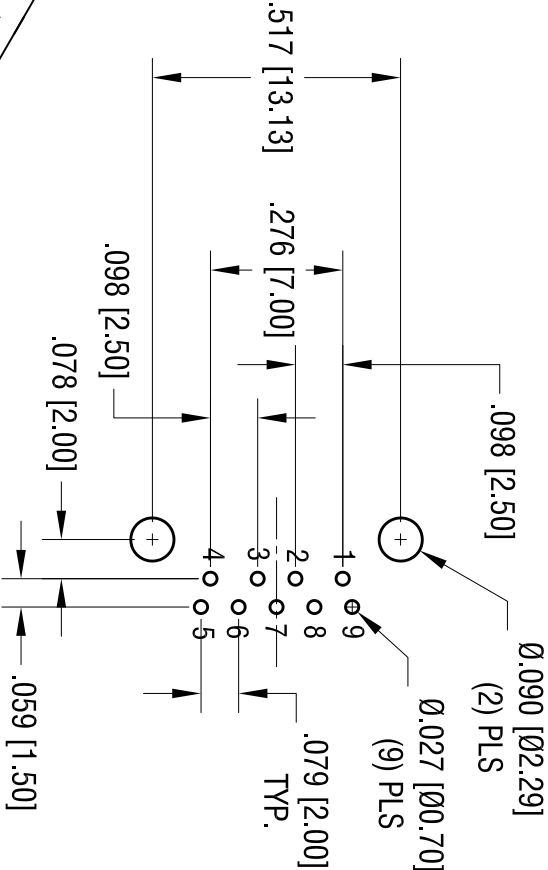

SOCKET SPECIFICATIONS:

SHELL: MAT'L- BRASS, NICKEL PLATE

CONTACT: MAT'L-.008 [0.20] PHOSPHOR BRONZE AND .008 [0.20] BRASS

INSULATION: MAT'L- THERMOPLASTIC, UL 94V-0

FINISH- GOLD FLASH OVER NICKEL ON CONTACT AREA

TIN OVER NICKEL ON SOLDER TAILS

ELECTRICAL CHARACTERISTICS:

CONTACT RESISTANCE: 30m Ω max.

INSULATION RESISTANCE: 1000 mega Ω min.


DIELECTRIC VOLTAGE : 1.8 Amp AT 250 V AC MIN.

OPERATING TEMPERATURE: -13°F (-25°C) TO 176°F (+80°C)

MECHANICAL CHARACTERISTICS:

INSERTION FORCE: 35N MAX.

EXTRACTION FORCE: 10 N MIN. , AND 8N MIN. AFTER THE SPECIFIED

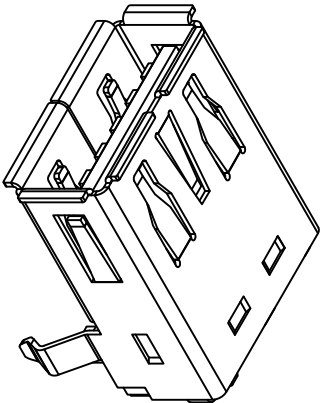

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP.				
www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900				
PART NAME				
USB TYPE A RECEPTACLE				
MATERIAL				
AS NOTED				
FINISH				
AS NOTED				
TOLERANCES		INCH	[MM]	CODE
DECIMAL		± .010	[± 0.25]	C/M
ANGULAR		± 1°		
UNLESS OTHERWISE SPECIFIED				
DRN BY		NT	DATE	4.06.10
APPD		LN	SCALE	2.5X
				945

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com