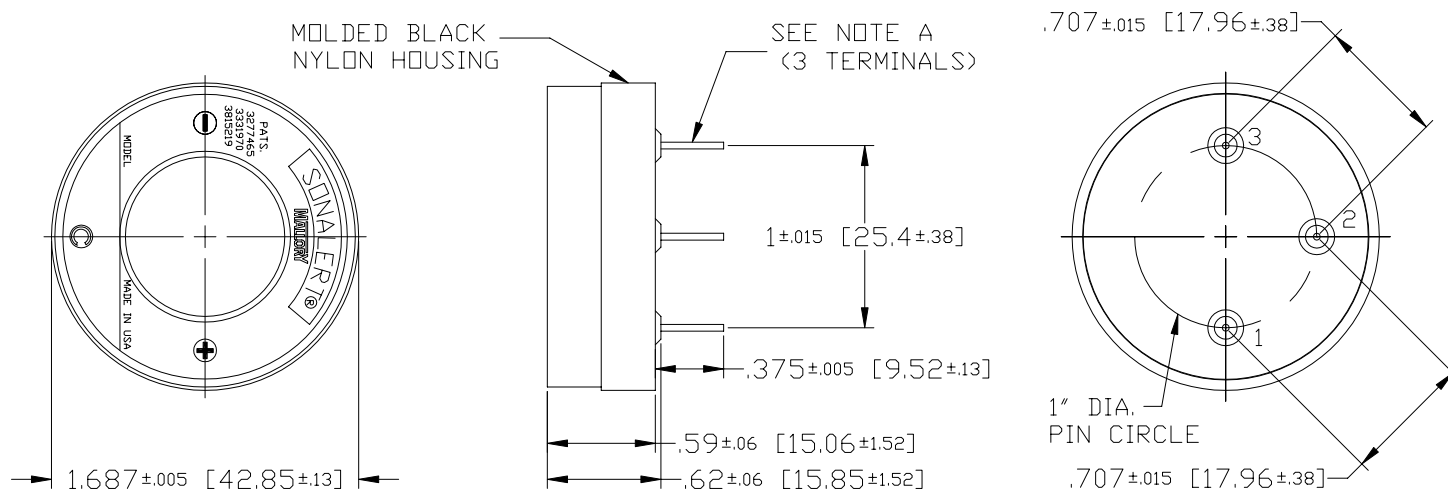


**Specifications:**

Sound level Category	Medium Sound Level
Mode of Operation	Continuous Tone or Slow Pulse
Mounting	Printed Circuit Board (see note B)
Voltage Rating	6 - 16 Vdc
Frequency	2900 Hz $\pm$ 500 Hz
Loudness (Min. Voltage)	68 dB(A) min. @ 2 FT and 6 Vdc
Loudness (Max Voltage)	78 dB(A) min. @ 2FT and 16 Vdc
Current Draw	3 mA Max @ 6 Vdc
Current Draw	12 mA Max @ 16 Vdc
Min Pulse Rate (PPS)	0.5 @ 6 Vdc
Max Pulse Rate (PPS)	2.0 @ 16 Vdc
Duty Cycle (%)	50 (Approx)
Storage Temperature	-40°C to +85°C
Operating Temperature	-30°C to +65°C
Weight (Typical)	0.6 oz (17 g)
Housing	6/6 Nylon, Color Black
Options	For other options contact factory


**Dimensions:** Inches (mm)**NOTE A:**

TERMINALS - .031" DIA. SOLDER COATED  
COPPER-CLAD STEEL.

TERMINAL 1 IS POSITIVE (CONTINUOUS),  
TERMINAL 3 IS NEGATIVE,  
TERMINAL 2 IS POSITIVE (PULSE).

**NOTE B:**

MOUNTING - INSERT INTO PRINTED CIRCUIT  
BOARD AND HAND OR MACHINE SOLDER.

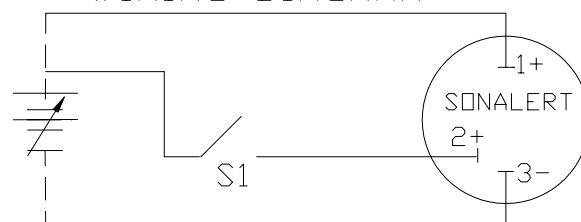**WIRING DIAGRAM**

IF S1 IS OPEN, UNIT IS CONTINUOUS  
IF S1 IS CLOSED, UNIT IS PULSATING

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
Email      amall@ameya360.com  
QQ         800077892  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email      service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
Email      mkt@ameya360.com