

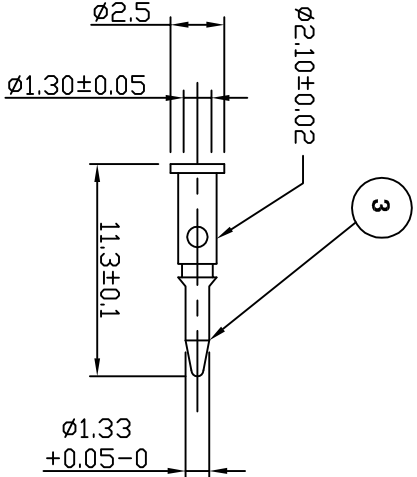
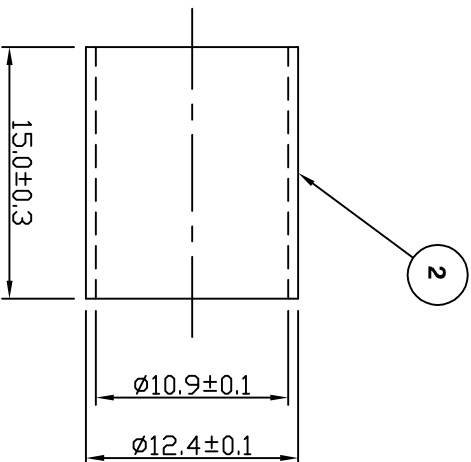


RoHS COMPLIANT

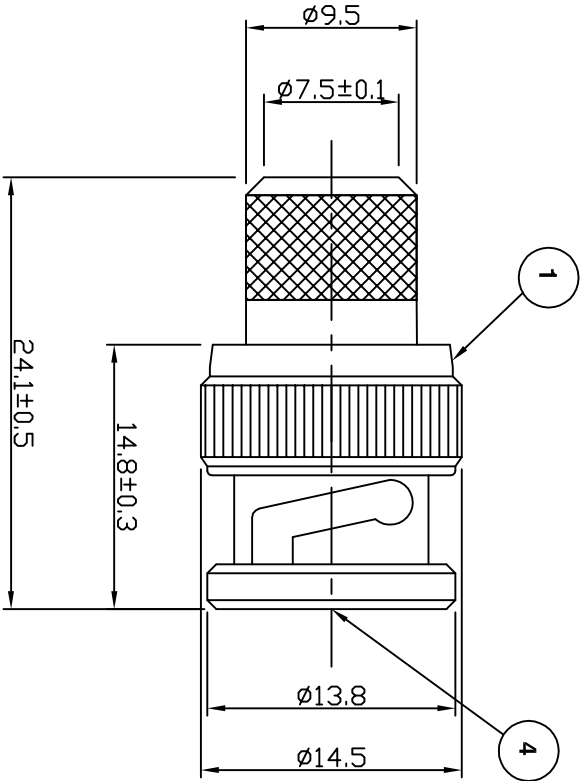

For stripping and assembly instructions see Drawing Number: VAIB1101



Strip and crimp dimensions				
Ferrule	10.9 HEX	Contact	1.69 HEX	
Dimensions Updated	JT	4	12 Mar 10	
CAD Issue	SN	3	21 Aug 01	
Ferrule size changed from 10.7/11.8 to 10.9/12.4	PDC	2	19 Oct 00	
First Issue	PDC	1	4 Sept 00	

DESCRIPTION OF REVISION	APPVD	ISS	DATE
-------------------------	-------	-----	------

PART NUMBER:	VB10-2020
--------------	-----------

TITLE:
BNC Crimp Plug for RG11

DRAWN BY:	S Nash
CHECKED BY:	R Drennan
APPROVED BY:	P Couzens

SCALE: Not To Scale
DIMENSIONS: mm
TOLERANCES: $\pm 0.2\text{mm}$ unless otherwise stated

Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford, Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 359938

EMERSON™
Network Power

Copyright © 2001 VITELEC ELECTRONICS LIMITED

Electrical Characteristics

Nominal Impedance:	75 ohms
Frequency Range:	DC to 1 GHz
VSWR:	1.3:1 maximum
Insertion Loss:	0.1 dB at 1 GHz
Operating Voltage (rms):	500 V maximum at sea level
Dielectric Withstand Voltage (rms):	1500 V maximum at sea level
Contact Resistance:	1.5 milliohms maximum
Insulation Resistance:	5000 megohms minimum

Mechanical Characteristics

Mating Cycles:	500 cycles minimum
Interface Dimensions:	Conform to MIL-C-39012

Environmental Characteristics

Temperature Range:	-65 °C to +165 °C
--------------------	-------------------

PART	DESCRIPTION
1	Body
2	Ferrule
3	Contact
4	Insulator

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com