ULTRA LOW NOISE POWER SUPPLY MODULE

ABPSM-ULN-A





FEATURES:

- AC Adapter Input Voltage 100VAC to240VAC; 50Hz and 60Hz cycles
 World Wide Capability
- Four DC Output Ports, 1.8V, 2.5V 3.3V & 5.0V
- Current Sourcing Capability 200mA max each port
- Exceptional low noise density; $< 7 \text{nV} / \sqrt{\text{Hz}}$ @ 1kHz offset Typical
- Better than 0.30µVrms over 0.1Hz to 1kHz bandwidth (best-in-class)
- Convenient, Ultra Low Noise Solution offering most common bias levels
- Portable Small form factor [3.50" * 1.50" * 0.65"] Machined Aluminum enclosure
- No external heat sinking is required
- · Low Cost

> APPLICATIONS:

- Lab Grade Power Supply designed to replace bulky & noisy power supplies for everyday use
- A must have for Noise Sensitive Measurements such as, S/N ratio, Spectral Purity, Jitter, Phase Noise & Harmonic Distortion
- Ideal for testing circuits including:
 - Audio Medical Diagnostic
 - RF Jitter Sensitive Digital
 - Microwave

STANDARD SPECIFICATIONS:

Parameter	Description	Value / Units (max)
Nominal Voltages	+1.8V, +2.5V, +3.3V, +5.0V	
Voltage Accuracy	Initial accuracy at T=25°C	< ±0.25%
	T=0 °C to T=+70 °C	< ±0.30%
Maximum Output Current	T=25 °C	200mA
Load Regulation	Δ Load = 1mA to 200mA	5mV
Output Impedance	Max. Output Impedance @ each port	0.20 Ω
Voltage Output Noise	Noise Density @100Hz	80 nV /√Hz
	Noise Density @1kHz	25 nV /√Hz
	Noise Density @10kHz	20 nV /√Hz

OUTLINE DIMENSIONS:








ULTRA LOW NOISE POWER SUPPLY MODULE


ABPSM-ULN-A







TYPICAL PERFORMANCE CURVES - LOW FREQUENCY NOISE

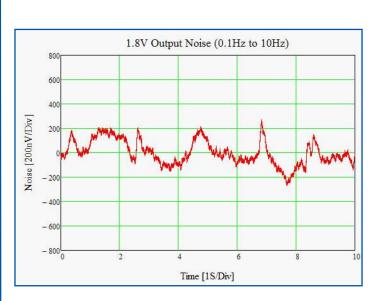

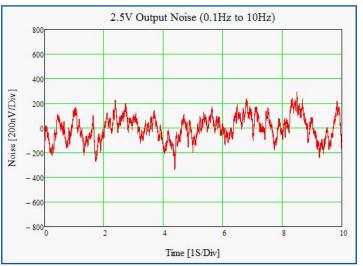

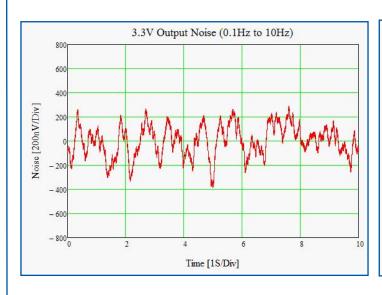

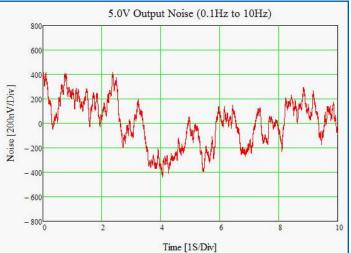






ULTRA LOW NOISE POWER SUPPLY MODULE

ABPSM-ULN-A





LOW FREQUENCY NOISE DENSITY PROFILE

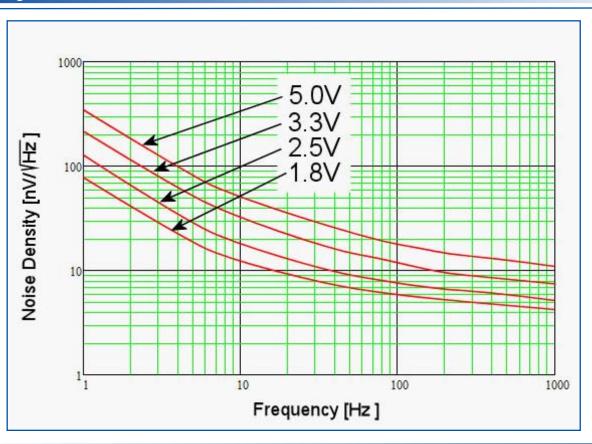

PRODUCT SUMMARY

- ABPSM-ULN-A Power Supply Module is designed to aid engineers seeking ultra clean power source for bench testing
- Ideally suited for Audio, RF, DDS, µWave circuits and product testing
- Low cost, small form-factor solution can be incorporated on production lines for final testing of electronic products
- Eliminates noise-contribution-uncertainty from the power source; during design characterization, design validation, product testing in both design & production environment
- A must have to test VCOs, Crystal Oscillators, PLL Synthesizers, Mixers, Amplifiers and any sub-circuit requiring ultra clean power source
- A low cost replacement for expensive Power Supply solutions, while offering superior noise performance
- Abracon is currently designing single-channel-board-level solutions that can be incorporated in customer designs to bias noise sensitive circuitry. Please contact Abracon for further details.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com