


- Non-contact motion sensing
- Operates over a broad range of supply voltages (4.5 V to 25 V)
- Excellent temperature stability
- Hall element, linear amplifier and Schmitt trigger on a single Hallogic silicon chip
- Performs in dirty environments over wide temperature range
- 0.125" (3.18 mm) wide gap




The Uni-Polar turns on with a (logic level “0”) after a sufficient magnetic field from the south pole of a magnet approaches the symbolized face of the device (Operating Point) and turns off (logic level “1”) after the magnetic field reached a minimum value. This feature makes these sensors ideal for applications in non-contact switching operations.

- Non-contact slotted magnetic switch
- Harsh environment encoder
- Assembly line automation
- Machine automation
- Machine safety
- End of travel sensor
- Door sensor

Ordering Information	
Part Number	Description
OHB900	Slotted Switch

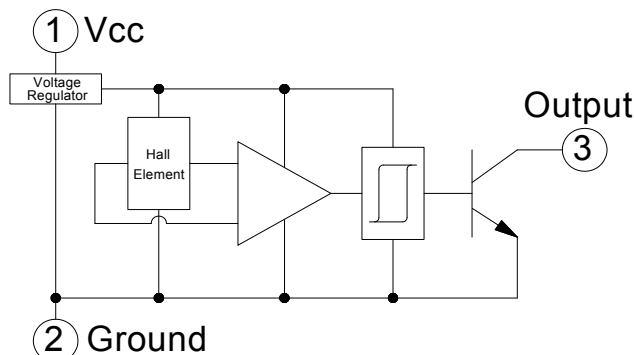

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

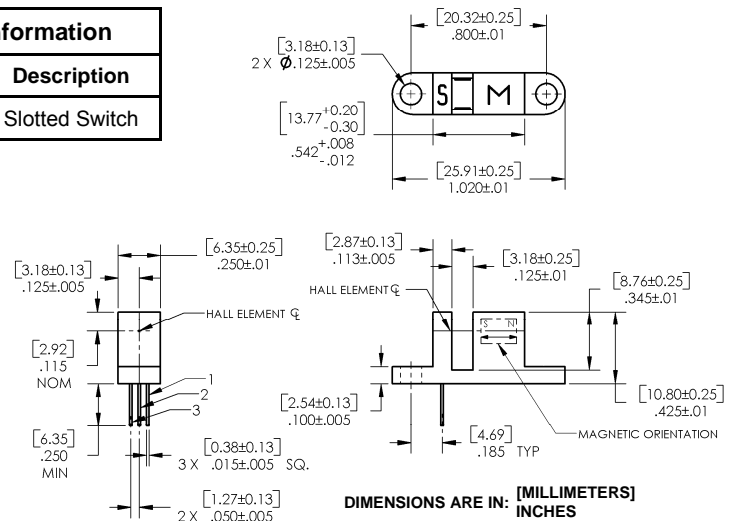

Pin #	Description
1	Vcc
2	Ground
3	Output

Absolute Maximum Ratings (TA = 25° C unless otherwise noted)


Supply Voltage, V _{CC}	25 V
Storage Temperature Range, T _S	-50°C to +160° C
Operating Temperature Range, T _A	-40°C to +150° C
Lead Soldering Temperature (1/8 in. (3.2 mm) from case for 5 sec. with soldering iron)	260° C
Output ON Current, I _{SINK}	25 mA
Output OFF Voltage, V _{OUT}	25 V
Magnetic Flux Density, B	Unlimited

Electrical Characteristics (V_{CC} = 4.5 V to 24 V, T_A = 25° C unless otherwise noted)⁽²⁾

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
I _{CC}	Supply Current	-	4	7	mA	V _{CC} = 24 V, Output Off
V _{OL}	Output Saturation Voltage	-	100	400	mV	V _{CC} = 4.5 V, I _{OL} = 20 mA, Slot Open
I _{OH}	Output Leakage Current	-	0.1	10	μA	V = 4.5 V, V _{OUT} = 24 V, Slot Blocked ⁽¹⁾
t _r	Output Rise Time	-	0.21	1	μs	R _L = 820 Ω, C _L = 20 pF
t _f	Output Fall Time	-	0.1	1	μs	R _L = 820 Ω, C _L = 20 pF


Notes:

- (1) Slot blocked with a ferrous material to interrupt magnetic flux.
- (2) See Hall-effect data sheet OH090 through OHS3100 Series for additional information — for reference only.

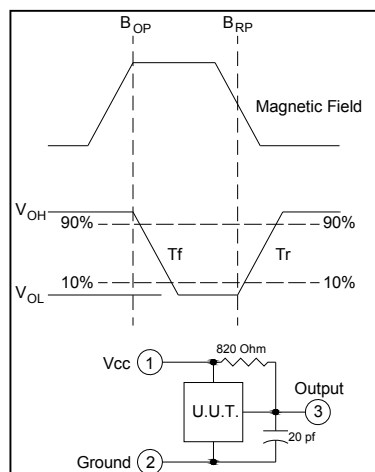

	Right Operate Point	Right Release Point	Left Release Point	Left Operate Point
Minimum	0.073" [1,85mm]	0.045" [1,14mm]	-0.045" [-1,14mm]	-0.073" [-1,85mm]
Maximum	0.003" [0,08mm]	-0.005" [-0,127mm]	0.005" [0,127mm]	-0.003" [-0,08mm]


Measurements are referenced to Center Line.

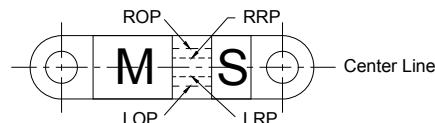


Vane - Material = 1018 Cold Rolled Steel - 0.03" [0.76mm] Thick
Location = 0.50" [12.7mm] from Bottom of Slot

OPTeK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


Rise & Fall vs Temperature

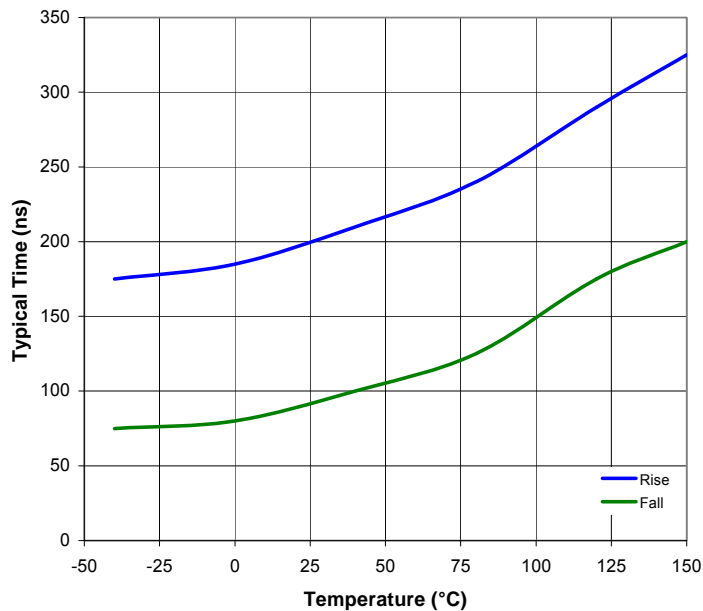

Icc vs Temperature

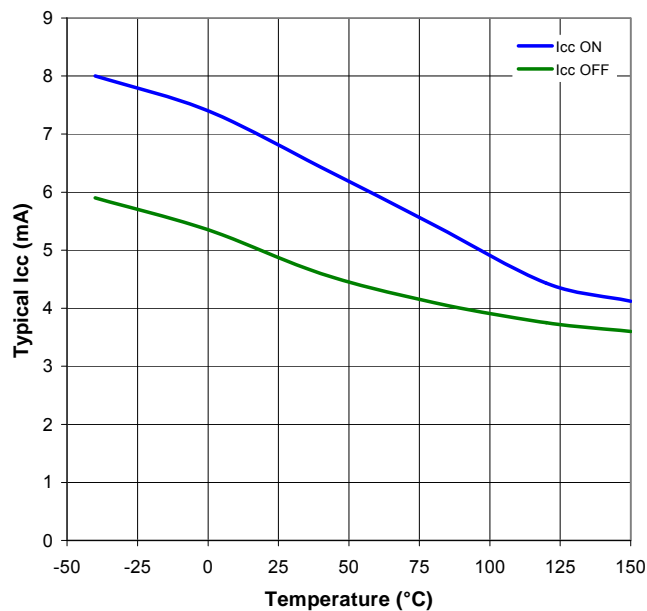

Saturation Voltage vs Temperature

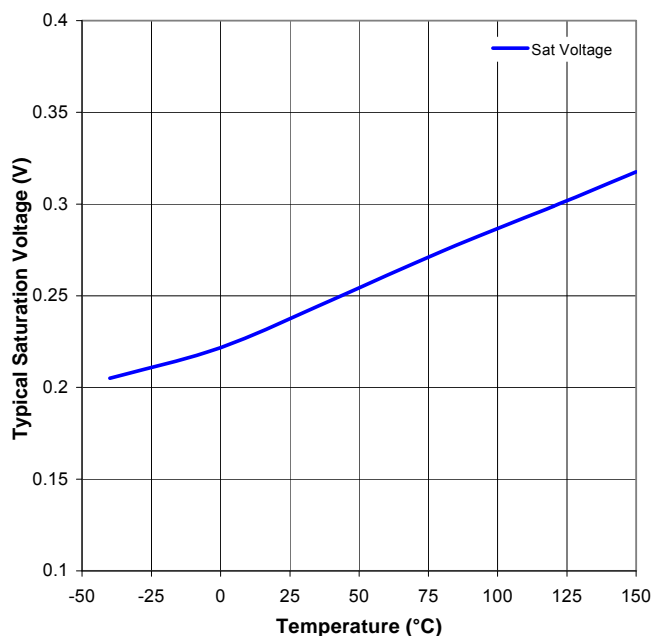

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com