


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

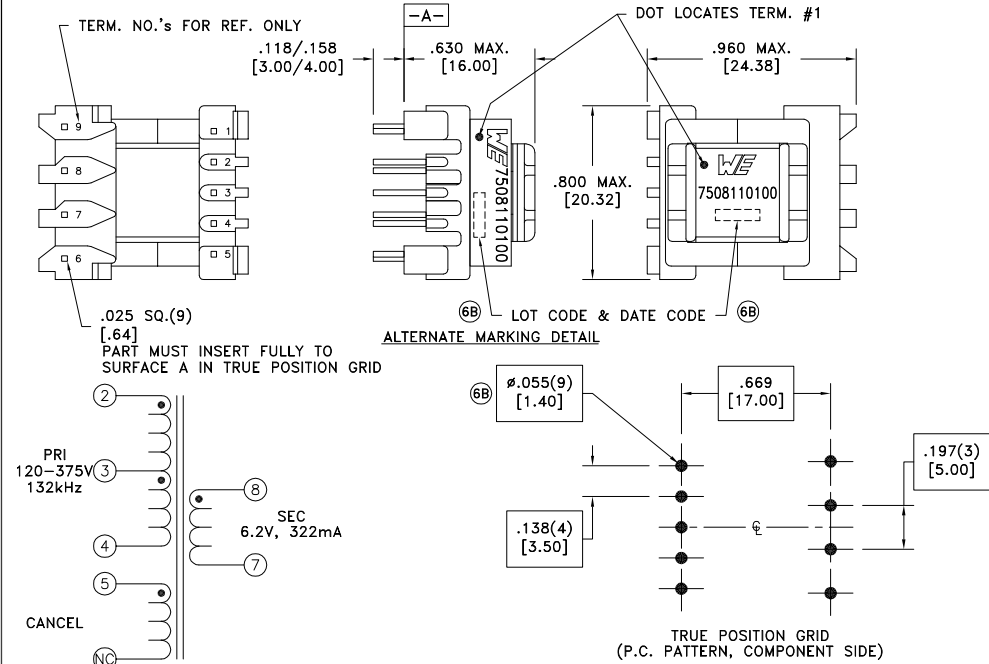

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-3 @20°C	2.15 ohms ±10%
D.C. RESISTANCE	3-4 @20°C	2.85 ohms ±10%
D.C. RESISTANCE	7-8 @20°C	0.040 ohms ±20%
INDUCTANCE	2-4 10kHz, 100mVAC, Ls	2.64mH ±10%
SATURATION CURRENT	20% rolloff from initial	350mA
LEAKAGE INDUCTANCE	2-4 tie(7+8), 100kHz, 100mVAC, Ls	30uH typ., 50uH max.
DIELECTRIC RATING	3-8 4500VAC, 1 second	4500VAC, 1 minute
DIELECTRIC RATING	5-8 4500VAC, 1 second	4500VAC, 1 minute
DIELECTRIC RATING	3-5 625VAC, 1 second	500VAC, 1 minute
URNS RATIO	(3-4):(2-3)	1:1, ±1%
URNS RATIO	(2-4):(8-7)	11.07:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

- 6B Designed to comply with the following requirements as defined by IEC61558-2-16:
- Reinforced insulation for a primary circuit at a working voltage of 400VDC.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 Footprint: ±.005	DRAWING TITLE	PART NO.
		Method: Tray PKG-0735 www.we-online.com/midcom	6B		TRANSFORMER	7508110100
6B	6/13	SEE REVISION SHEET FOR	REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 7508110100	SPECIFICATION SHEET 1 OF 1
6A	3/09					

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com