
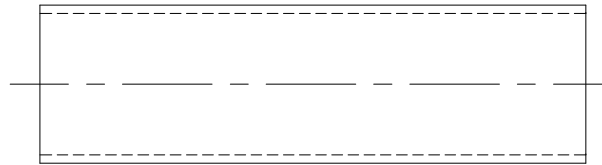
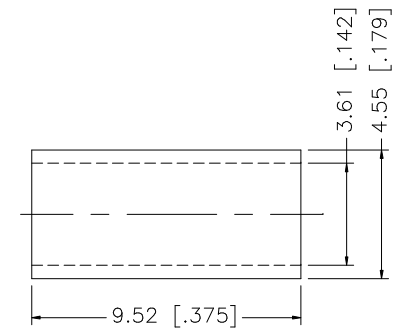



2.00 [.079]

2.70 [.106]

5.20 [.205]

RECOMMENDED
CABLE STRIPPING DIM'S

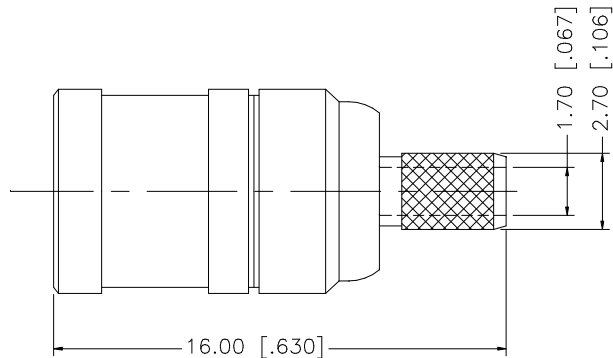

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex									
8					DRAWN	G.R.S.	01/30/04											
7					CHECKED				PART DESCRIPTION SMB CRIMP PLUG (FOR RG-316U/D CABLE)									
6					ISSUED													
5	HEAT SHRINK TUBE		BLACK		1	SHEET	1 OF 1		PART NO. 142187									
4	FERRULE	COPPER	GOLD		1													
3	CONTACT PIN	BER. COPPER	GOLD		1													
2	INSULATOR	TEFLON	NATURAL		1													
1	BODY	BRASS	GOLD	1	CAD FILE		C:/142/142187.DWG		DWG. NO.		142187.DWG	REV.	A	SIZE	A	SCALE	NA	
	DESCRIPTION	MATERIAL	FINISH	QTY														

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com