

# PolarHT™ Power MOSFET

## IXTK 120N25P


$$\begin{aligned} V_{DSS} &= 250 \text{ V} \\ I_{D25} &= 120 \text{ A} \\ R_{DS(on)} &\leq 24 \text{ m}\Omega \end{aligned}$$

N-Channel Enhancement Mode  
Avalanche Rated



| Symbol       | Test Conditions                                                                                                                         | Maximum Ratings |                  |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------------|
| $V_{DSS}$    | $T_J = 25^\circ\text{C to } 175^\circ\text{C}$                                                                                          | 250             | V                |
| $V_{DGR}$    | $T_J = 25^\circ\text{C to } 175^\circ\text{C}; R_{GS} = 1 \text{ M}\Omega$                                                              | 250             | V                |
| $V_{GS}$     | Continuous                                                                                                                              | $\pm 20$        | V                |
| $V_{GSM}$    | Transient                                                                                                                               | $\pm 30$        | V                |
| $I_{D25}$    | $T_C = 25^\circ\text{C}$                                                                                                                | 120             | A                |
| $I_{D(RMS)}$ | External lead current limit                                                                                                             | 75              | A                |
| $I_{DM}$     | $T_C = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$                                                                              | 300             | A                |
| $I_{AR}$     | $T_C = 25^\circ\text{C}$                                                                                                                | 60              | A                |
| $E_{AR}$     | $T_C = 25^\circ\text{C}$                                                                                                                | 60              | mJ               |
| $E_{AS}$     | $T_C = 25^\circ\text{C}$                                                                                                                | 2.5             | J                |
| $dv/dt$      | $I_S \leq I_{DM}$ , $di/dt \leq 100 \text{ A}/\mu\text{s}$ , $V_{DD} \leq V_{DSS}$ ,<br>$T_J \leq 150^\circ\text{C}$ , $R_G = 4 \Omega$ | 10              | V/ns             |
| $P_D$        | $T_C = 25^\circ\text{C}$                                                                                                                | 700             | W                |
| $T_J$        |                                                                                                                                         | -55 ... +175    | $^\circ\text{C}$ |
| $T_{JM}$     |                                                                                                                                         | 175             | $^\circ\text{C}$ |
| $T_{stg}$    |                                                                                                                                         | -55 ... +150    | $^\circ\text{C}$ |
| $T_L$        | 1.6 mm (0.062 in.) from case for 10 s                                                                                                   | 300             | $^\circ\text{C}$ |
| $T_{SOLD}$   | Plastic body for 10 s                                                                                                                   | 260             | $^\circ\text{C}$ |
| $M_d$        | Mounting torque                                                                                                                         | 1.13/10         | Nm/lb.in.        |
| Weight       |                                                                                                                                         | 10              | g                |

TO-264 (IXTK)



G = Gate      D = Drain  
S = Source      TAB = Drain

### Features

- International standard package
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
- easy to drive and to protect

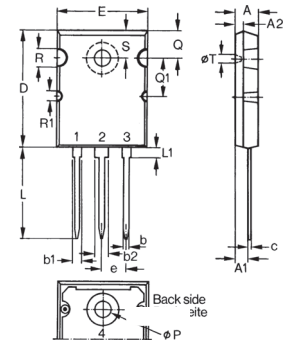
### Advantages

- Easy to mount
- Space savings
- High power density

| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified)                                      | Characteristic Values |      |                                       |
|--------------|------------------------------------------------------------------------------------------------------------------|-----------------------|------|---------------------------------------|
|              |                                                                                                                  | Min.                  | Typ. | Max.                                  |
| $BV_{DSS}$   | $V_{GS} = 0 \text{ V}$ , $I_D = 250 \mu\text{A}$                                                                 | 250                   |      | V                                     |
| $V_{GS(th)}$ | $V_{DS} = V_{GS}$ , $I_D = 500 \mu\text{A}$                                                                      | 2.5                   |      | 5.0 V                                 |
| $I_{GSS}$    | $V_{GS} = \pm 20 \text{ V}_{DC}$ , $V_{DS} = 0$                                                                  |                       |      | $\pm 200 \text{ nA}$                  |
| $I_{DSS}$    | $V_{DS} = V_{DSS}$<br>$V_{GS} = 0 \text{ V}$<br>$T_J = 125^\circ\text{C}$                                        |                       |      | 25 $\mu\text{A}$<br>250 $\mu\text{A}$ |
| $R_{DS(on)}$ | $V_{GS} = 10 \text{ V}$ , $I_D = 0.5 I_{D25}$<br>Pulse test, $t \leq 300 \mu\text{s}$ , duty cycle $d \leq 2 \%$ | 19                    |      | 24 $\text{m}\Omega$                   |

| Symbol       | Test Conditions                                                                                         | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |                        |      |
|--------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------|------|
|              |                                                                                                         | Min.                                                                              | Typ.                   | Max. |
| $g_{fs}$     | $V_{DS} = 10\text{ V}$ ; $I_D = 0.5 I_{D25}$ , pulse test                                               | 50                                                                                | 70                     | S    |
| $C_{iss}$    | $V_{GS} = 0\text{ V}$ , $V_{DS} = 25\text{ V}$ , $f = 1\text{ MHz}$                                     |                                                                                   | 8000                   | pF   |
| $C_{oss}$    |                                                                                                         |                                                                                   | 1300                   | pF   |
| $C_{rss}$    |                                                                                                         |                                                                                   | 220                    | pF   |
| $t_{d(on)}$  | $V_{GS} = 10\text{ V}$ , $V_{DS} = 0.5 V_{DSS}$ , $I_D = 60\text{ A}$<br>$R_G = 3.3\ \Omega$ (External) |                                                                                   | 30                     | ns   |
| $t_r$        |                                                                                                         |                                                                                   | 33                     | ns   |
| $t_{d(off)}$ |                                                                                                         |                                                                                   | 130                    | ns   |
| $t_f$        |                                                                                                         |                                                                                   | 33                     | ns   |
| $Q_{g(on)}$  | $V_{GS} = 10\text{ V}$ , $V_{DS} = 0.5 V_{DSS}$ , $I_D = 0.5 I_{D25}$                                   |                                                                                   | 185                    | nC   |
| $Q_{gs}$     |                                                                                                         |                                                                                   | 50                     | nC   |
| $Q_{gd}$     |                                                                                                         |                                                                                   | 80                     | nC   |
| $R_{thJC}$   |                                                                                                         | 0.15                                                                              | $0.18^\circ\text{C/W}$ |      |
| $R_{thCS}$   |                                                                                                         |                                                                                   | $^\circ\text{C/W}$     |      |

| Source-Drain Diode |                                                                                                           | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |               |
|--------------------|-----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|---------------|
| Symbol             | Test Conditions                                                                                           | Min.                                                                              | Typ. | Max.          |
| $I_S$              | $V_{GS} = 0\text{ V}$                                                                                     |                                                                                   |      | 120 A         |
| $I_{SM}$           | Repetitive                                                                                                |                                                                                   |      | 300 A         |
| $V_{SD}$           | $I_F = I_S$ , $V_{GS} = 0\text{ V}$ ,<br>Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $d \leq 2\%$  |                                                                                   |      | 1.5 V         |
| $t_{rr}$           | $I_F = 25\text{ A}$ , $-di/dt = 100\text{ A}/\mu\text{s}$<br>$V_R = 100\text{ V}$ , $V_{GS} = 0\text{ V}$ |                                                                                   | 200  | ns            |
| $Q_{RM}$           |                                                                                                           |                                                                                   | 3.0  | $\mu\text{C}$ |


**TO-264 (IXTK) Outline**


| Dim. | Millimeter |       | Inches   |       |
|------|------------|-------|----------|-------|
|      | Min.       | Max.  | Min.     | Max.  |
| A    | 4.82       | 5.13  | .190     | .202  |
| A1   | 2.54       | 2.89  | .100     | .114  |
| A2   | 2.00       | 2.10  | .079     | .083  |
| b    | 1.12       | 1.42  | .044     | .056  |
| b1   | 2.39       | 2.69  | .094     | .106  |
| b2   | 2.90       | 3.09  | .114     | .122  |
| c    | 0.53       | 0.83  | .021     | .033  |
| D    | 25.91      | 26.16 | 1.020    | 1.030 |
| E    | 19.81      | 19.96 | .780     | .786  |
| e    | 5.46 BSC   |       | .215 BSC |       |
| J    | 0.00       | 0.25  | .000     | .010  |
| K    | 0.00       | 0.25  | .000     | .010  |
| L    | 20.32      | 20.83 | .800     | .820  |
| L1   | 2.29       | 2.59  | .090     | .102  |
| P    | 3.17       | 3.66  | .125     | .144  |
| Q    | 6.07       | 6.27  | .239     | .247  |
| Q1   | 8.38       | 8.69  | .330     | .342  |
| R    | 3.81       | 4.32  | .150     | .170  |
| R1   | 1.78       | 2.29  | .070     | .090  |
| S    | 6.04       | 6.30  | .238     | .248  |
| T    | 1.57       | 1.83  | .062     | .072  |


IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585  
one or more of the following U.S. patents: 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692  
4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2


**Fig. 1. Output Characteristics  
@ 25°C**

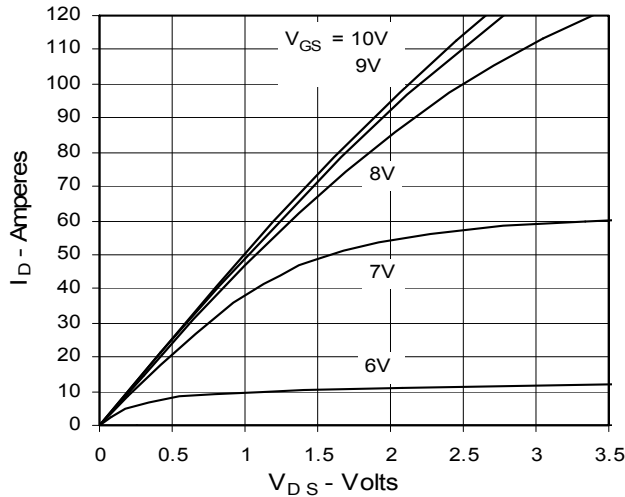


**Fig. 2. Extended Output Characteristics  
@ 25°C**

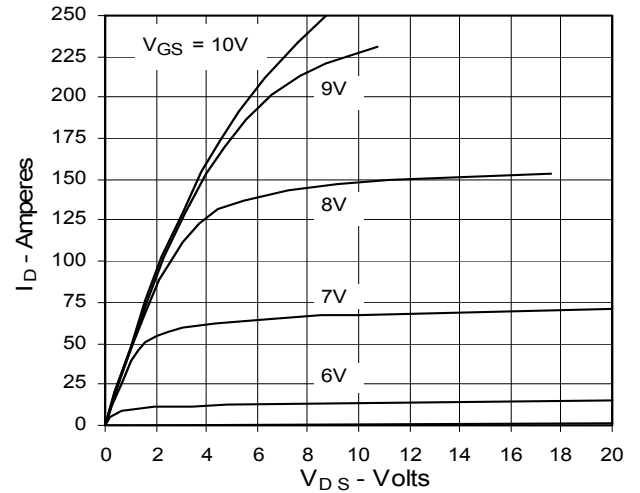


**Fig. 3. Output Characteristics  
@ 150°C**

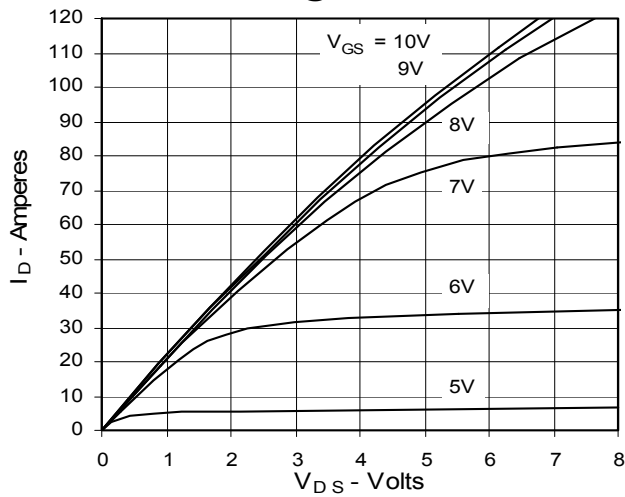


**Fig. 4.  $R_{DS(on)}$  Normalized to 0.5 ID25  
Value vs. Junction Temperature**

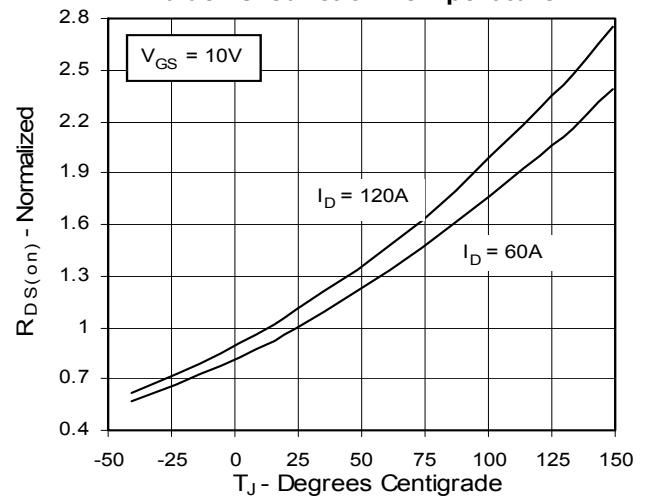

**Fig. 5.  $R_{DS(on)}$  Normalized to 0.5 ID25  
Value vs. Drain Current**

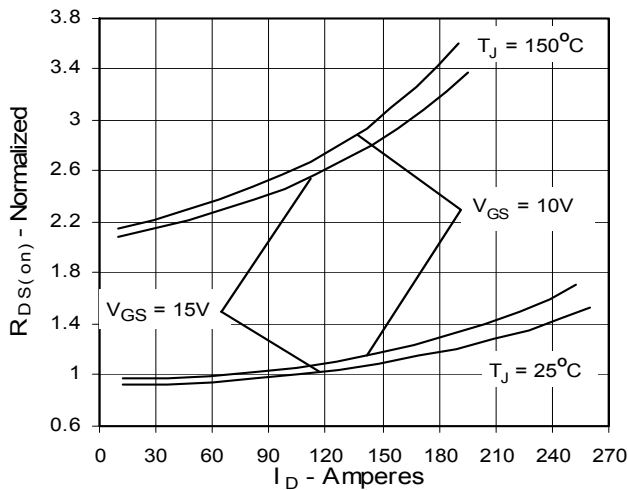

**Fig. 6. Drain Current vs. Case  
Temperature**

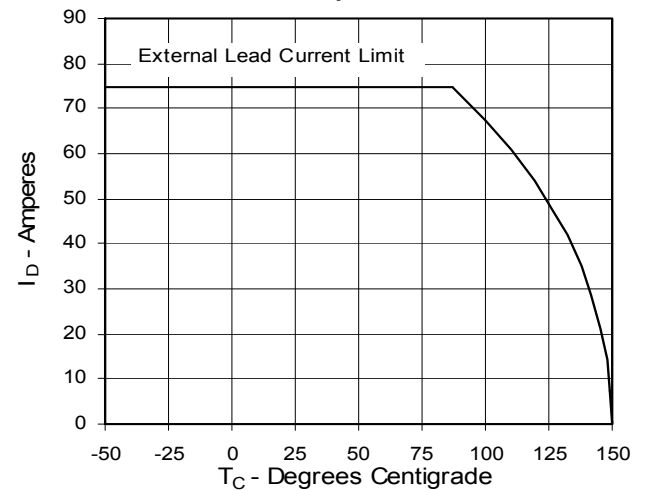

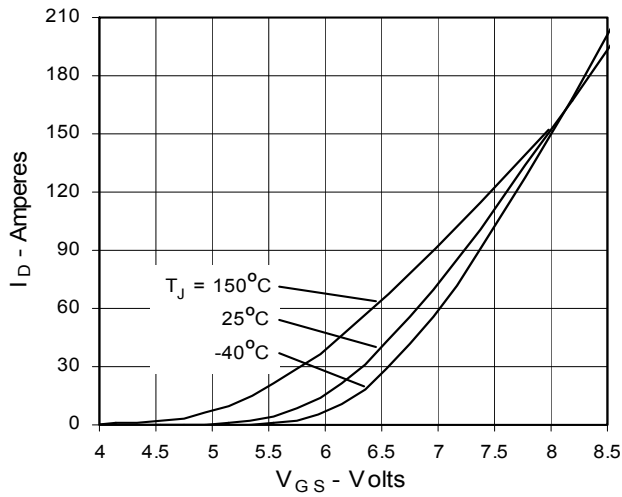
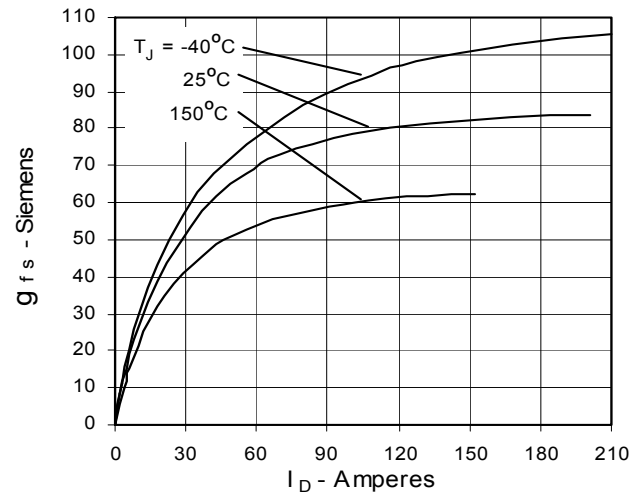
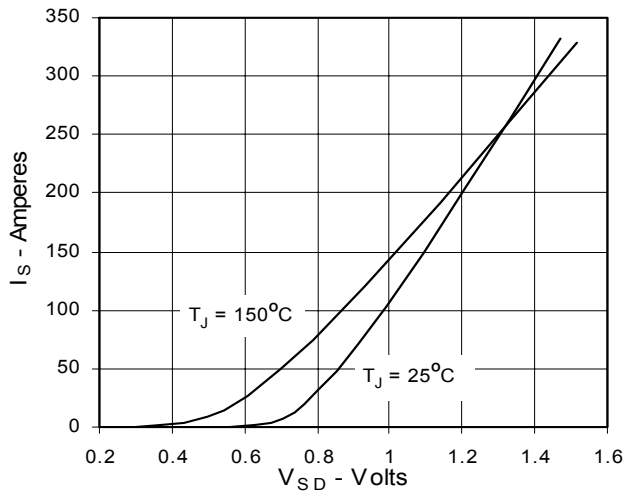
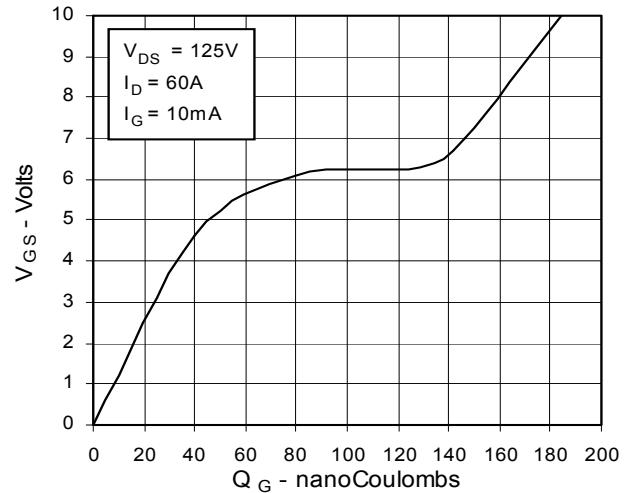
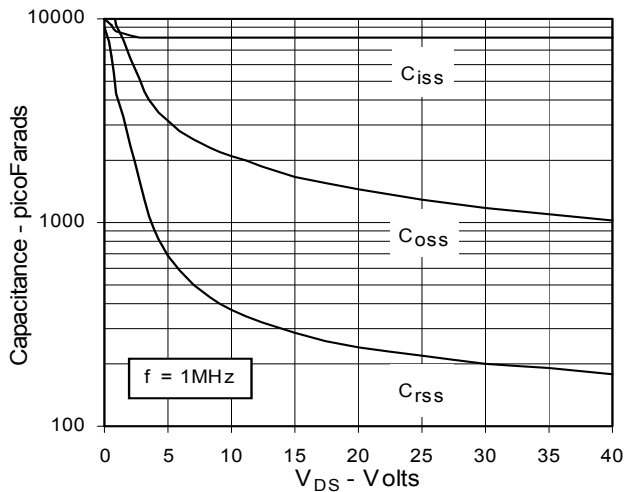
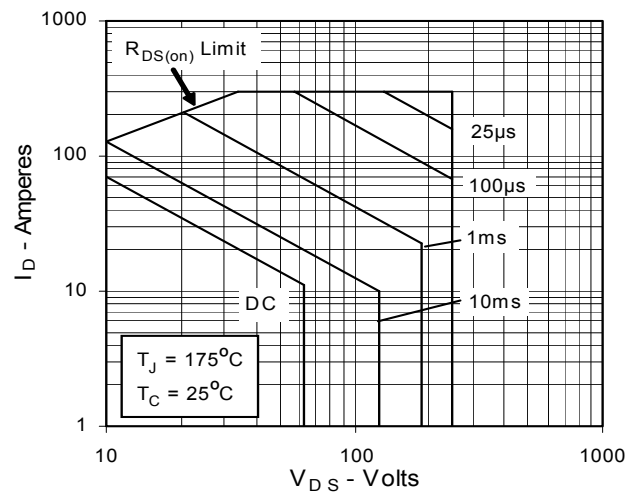
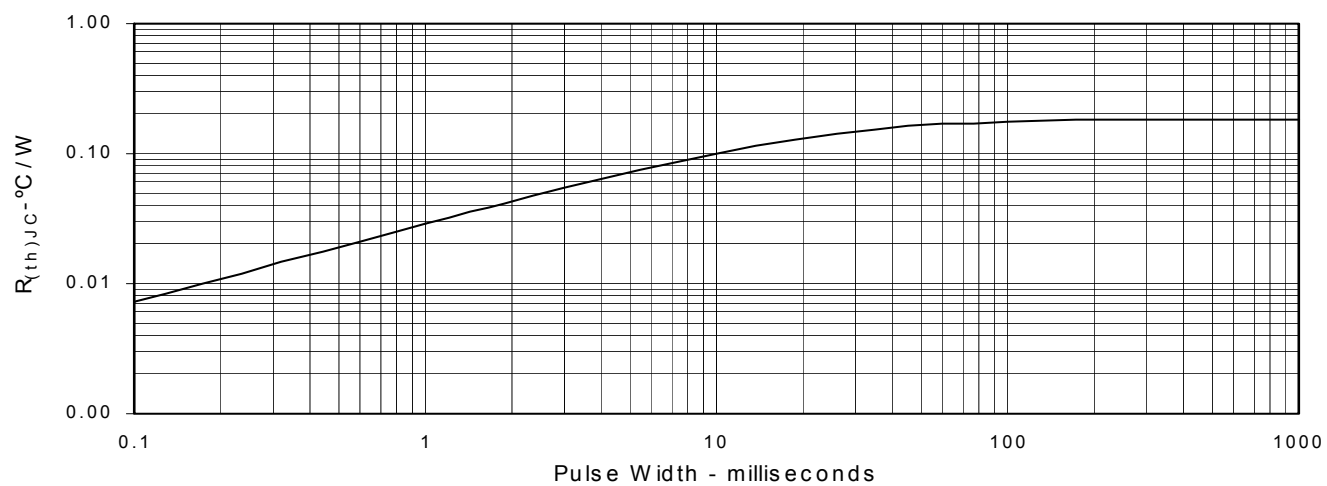
**Fig. 7. Input Admittance**

**Fig. 8. Transconductance**

**Fig. 9. Source Current vs. Source-To-Drain Voltage**

**Fig. 10. Gate Charge**

**Fig. 11. Capacitance**

**Fig. 12. Forward-Bias Safe Operating Area**


Fig. 13. Maximum Transient Thermal Resistance



# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct      +86 (21) 6401-6692  
Email        amall@ameya360.com  
QQ            800077892  
Skype        ameyasales1 ameyasales2

➤ Customer Service :

Email        service@ameya360.com

➤ Partnership :

Tel            +86 (21) 64016692-8333  
Email        mkt@ameya360.com