



## Series: iMOD™

### Features:

- Built with patented THiNCAPS™
- Front terminal connections
- ROHS and CE compliance
- Monitoring to help achieve long life

### Applications:

- AGVs
- Robotics
- Harbor crane
- Industrial Equipment

### Markets:

- Manufacturing
- Logistics
- Pharmaceutical
- Warehousing
- Distribution
- Logistics
- Shipping

### Markings:

**Products are marked with the following:**

Rated capacitance, rated voltage, product number, name of manufacturer, positive and negative terminal marking.

#### Operating

Voltage, Rated	2.7 V/Cell
Voltage, Surge	2.85 V/Cell
Capacitance Tolerance	+10% / -0%

#### Temperature

Range, Operational	0°C to 50°C (at Rated Current)
Range, Storage	-25°C to 60°C

#### Life

DC	10 years, rated voltage, 25°C
	$\Delta C < 20\%$ decrease, ESR < 100% increase
Endurance	1000 hrs, rated voltage, 70°C
	$\Delta C < 20\%$ decrease, ESR < 100% increase
Shelf	1000 hrs, no voltage, 70°C
	$\Delta C < 20\%$ decrease, ESR < 100% increase
Cycle	>500,000 cycles, Rated to half rated voltage, 25°C
	$\Delta C < 20\%$ decrease, ESR, 100% increase

#### Standards Compliance

RoHS



## Product Specifications

Part Number	iMOD054V062P3L-11A	iMOD059V062P3L-15A	iMOD054V062A3L-15A
-------------	--------------------	--------------------	--------------------

### Electrical

Capacitance (F)	62	62	62
ESR, DC (mΩ) [3ms]	17	17	17
Overvoltage/Temp Monitor	Yes	Yes	Yes
Voltage Rated (V)	54	54	54
Peak Voltage	57	57	57

### Cycling

Current, Peak [1s] (A)	815	815	815
Continuous Current (A)*	35	22	22
Current, Short Circuit (A)	3100	3100	3100

### Management


Balancing Method	Passive	Passive	Active
------------------	---------	---------	--------

### Energy/Power

$E_{\max}$ (Whr)	25	25	25
$E_{\max}$ (Whr/kg)	3.1	3.1	3.1
$E_{\max}$ (Whr/L)	2.2	2.8	2.8
$P_{\max}$ (kW/kg)	5.4	5.4	5.4
$P_{\max}$ (kW/L)	3.8	4.8	4.8
$P_d$ (kW/kg)	2.6	2.6	2.6

### Physical

W (mm) [max]	143	143	143
L (mm)	334	334	334
H (mm)	238	189	189
Mass (kg)	8	8	8
Volume (L)	11	9	9
Specials	FAN/Plastic Housing	Plastic Housing	Plastic Housing

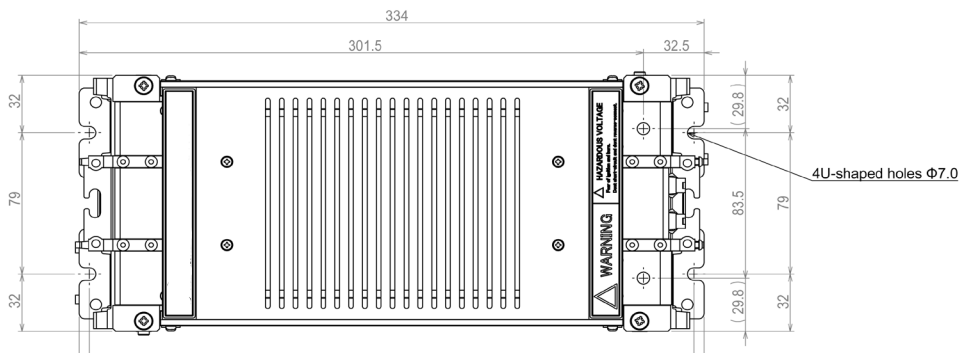

### Additional Technical Information

Product specification test methods available in separate document.

\*Rated current = continuous current with 20°C temperature rise.



18 Stadium Circle, Oneonta, NY 13820, USA

Toll Free: +1.877.751.4222

607.441.3500 | Fax: 607.433.9014

[www.ioxus.com](http://www.ioxus.com) | [info@ioxus.com](mailto:info@ioxus.com)

© 2012 Ioxus, Inc. | 121011

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype       ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email       mkt@ameya360.com