











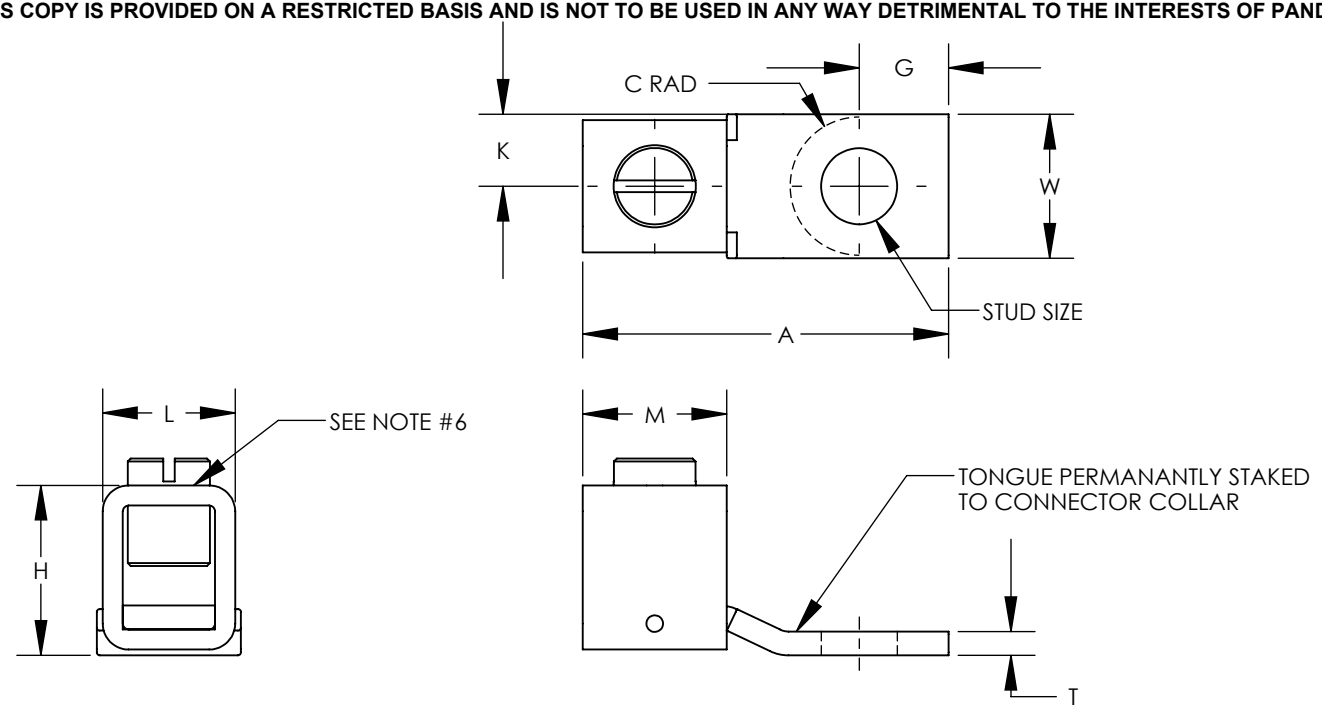





A triangle with the letter 'A' inside it.



NOTES:

1. MATERIAL:
BODY - COPPER
 ◊ DENOTES BODY IS TIN PLATED COPPER
SCREW - STEEL, ZINC PLATED
2. UL LISTED & CSA CERTIFIED FOR USE UP TO 600V & TEMPERATURE RATED 90°C
3. RATED FOR USE WITH COPPER STRANDED CODE CONDUCTOR ONLY
4. THESE PARTS ARE RoHS COMPLIANT
5. SEE PACKAGING LABEL FOR TIGHTENING TORQUE INFORMATION
6. PROFILE OF COLLAR MAY VARY BETWEEN CURVED AND FLAT.
7. PKG QTY:
C = 100
D = 250
Q = 25



														
	PANDUIT PART NUMBER	WIRE RANGE COPPER	CURRENT RATING (AMPS)	STUD SIZE IN	DIMENSIONS - IN [mm] +/- .02 [.5]									HEX SIZE*
					G	W	K	A	M	T	H	L	C (MAX)	
 	CX35-36-CY	#14 AWG - #6 AWG	35	3/16"	0.23 [5.8]	0.38 [9.7]	0.19 [4.8]	1.04 [26.4]	0.38 [9.7]	0.07 [1.8]	0.49 [12.4]	0.38 [9.7]	0.22 [5.6]	SLOTTED
	CX35-36-DY	#14 AWG - #6 AWG	35	3/16"	0.23 [5.8]	0.38 [9.7]	0.19 [4.8]	1.04 [26.4]	0.38 [9.7]	0.07 [1.8]	0.49 [12.4]	0.38 [9.7]	0.22 [5.6]	SLOTTED
	CX35-36T-CY	#14 AWG - #6 AWG	35	3/16"	0.23 [5.8]	0.38 [9.7]	0.19 [4.8]	1.04 [26.4]	0.38 [9.7]	0.07 [1.8]	0.49 [12.4]	0.38 [9.7]	0.22 [5.6]	SLOTTED
	CX35-36T-DY	#14 AWG - #6 AWG	35	3/16"	0.23 [5.8]	0.38 [9.7]	0.19 [4.8]	1.04 [26.4]	0.38 [9.7]	0.07 [1.8]	0.49 [12.4]	0.38 [9.7]	0.22 [5.6]	SLOTTED
	CX70-14-CY	#14 AWG - #4 AWG (2) #14 AWG (2) #12 AWG	70	1/4"	0.31 [7.9]	0.50 [12.7]	0.25 [6.4]	1.27 [32.3]	0.50 [12.7]	0.08 [2.03]	0.57 [14.5]	0.46 [11.7]	0.28 [7.1]	SLOTTED
	CX70-14T-CY	#14 AWG - #4 AWG (2) #14 AWG (2) #12 AWG	70	1/4"	0.31 [7.9]	0.50 [12.7]	0.25 [6.4]	1.27 [32.3]	0.50 [12.7]	0.08 [2.03]	0.57 [14.5]	0.46 [11.7]	0.28 [7.1]	SLOTTED
	CX125-14SL-QY	#4 AWG - #1/0 AWG	125	1/4"	0.43 [10.9]	0.62 [15.7]	0.31 [7.9]	1.53 [38.9]	0.62 [15.7]	0.11 [2.7]	0.77 [19.6]	0.57 [14.5]	0.41 [10.4]	SLOTTED
	CX125-56SLT-QY	#4 AWG - #1/0 AWG	125	5/16"	0.43 [10.9]	0.62 [15.7]	0.31 [7.9]	1.53 [38.9]	0.62 [15.7]	0.11 [2.7]	0.77 [19.6]	0.57 [14.5]	0.41 [10.4]	SLOTTED
	CX225-56HK-QY	#2 AWG - #4/0 AWG	225	5/16"	0.56 [14.2]	.99 [25.2]	0.50 [12.7]	2.19 [55.6]	1.00 [25.4]	0.11 [2.7]	1.13 [28.7]	0.85 [21.6]	0.50 [12.7]	3/16
 	CX225-56HKT-QY	#2 AWG - #4/0 AWG	225	5/16"	0.56 [14.2]	.99 [25.2]	0.50 [12.7]	2.19 [55.6]	1.00 [25.4]	0.11 [2.7]	1.13 [28.7]	0.85 [21.6]	0.50 [12.7]	3/16
	CX225-38HKT-QY	#2 AWG - #4/0 AWG	225	3/8"	0.56 [14.2]	.99 [25.2]	0.50 [12.7]	2.19 [55.6]	1.00 [25.4]	0.11 [2.7]	1.13 [28.7]	0.85 [21.6]	0.50 [12.7]	3/16

* HEX STYLE & SIZE MAY DIFFER FROM CHART. DIFFERENCE IN SIZE WILL NOT AFFECT FIT, FORM, OR FUNCTION OF PART

							TITLE CX SERIES COPPER MECHANICAL CONNECTORS CUSTOMER DRAWING					
							ITEM REVISION NAME N41664BA-C41664/12					
							DATASET FILE NAME C41664/12.SLDDRW					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .XX ± ANGLES ± 			MATERIAL SEE NOTES		
12	4/13	JHNU	JHNU	RGB	REPLACED MISSING "A" DIMENSION REVISED HEX SIZE FOR CX225: 3/16 WAS 9/16	N41664BA-C41664						
11	2/13	JHNU	JHNU	RGB	REVISED TITLE BLOCK	N41664BA-C41664						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY JHNU	DATE 3/06	CHK JHNU	SCALE NONE	DRAWING NUMBER C41664_12	SIZE B

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com