


## High Voltage IGBT


## IXGH10N170 IXGT10N170




$$\begin{aligned} V_{CES} &= 1700V \\ I_{C90} &= 10A \\ V_{CE(sat)} &\leq 4.0V \end{aligned}$$

| Symbol                        | Test Conditions                                                                            | Maximum Ratings                        |                  |
|-------------------------------|--------------------------------------------------------------------------------------------|----------------------------------------|------------------|
| $V_{CES}$                     | $T_C = 25^\circ\text{C}$ to $150^\circ\text{C}$                                            | 1700                                   | V                |
| $V_{CGR}$                     | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ , $R_{GE} = 1M\Omega$                      | 1700                                   | V                |
| $V_{GES}$                     | Continuous                                                                                 | $\pm 20$                               | V                |
| $V_{GEM}$                     | Transient                                                                                  | $\pm 30$                               | V                |
| $I_{C25}$                     | $T_C = 25^\circ\text{C}$                                                                   | 20                                     | A                |
| $I_{C90}$                     | $T_C = 90^\circ\text{C}$                                                                   | 10                                     | A                |
| $I_{CM}$                      | $T_C = 25^\circ\text{C}$ , 1ms                                                             | 70                                     | A                |
| <b>SSOA</b><br><b>(RBSOA)</b> | $V_{GE} = 15V$ , $T_{VJ} = 125^\circ\text{C}$ , $R_G = 16\Omega$<br>Clamped inductive load | $I_{CM} = 20$<br>@ $0.8 \cdot V_{CES}$ | A                |
| $P_C$                         | $T_C = 25^\circ\text{C}$                                                                   | 110                                    | W                |
| $T_J$                         |                                                                                            | -55 ... +150                           | $^\circ\text{C}$ |
| $T_{JM}$                      |                                                                                            | 150                                    | $^\circ\text{C}$ |
| $T_{stg}$                     |                                                                                            | -55 ... +150                           | $^\circ\text{C}$ |
| $T_L$                         | 1.6mm (0.062 in.) from case for 10s                                                        | 300                                    | $^\circ\text{C}$ |
| $T_{SOLD}$                    | Plastic body for 10 seconds                                                                | 260                                    | $^\circ\text{C}$ |
| $M_d$                         | Mounting torque (TO-247)                                                                   | 1.13/10                                | Nm/lb.in.        |
| <b>Weight</b>                 | TO-247                                                                                     | 6                                      | g                |
|                               | TO-268                                                                                     | 4                                      | g                |

TO-247 (IXGH)



TO-268 (IXGT)



G = Gate      C = Collector  
E = Emitter    TAB = Collector

### Features

- International standard packages JEDEC TO-268 and JEDEC TO-247 AD
- High current handling capability
- MOS Gate turn-on - drive simplicity
- Rugged NPT structure
- Molding epoxies meet UL 94 V-0 flammability classification

### Applications

- Capacitor discharge & pulser circuits
- AC motor speed control
- DC servo and robot drives
- DC choppers
- Uninterruptible power supplies (UPS)
- Switched-mode and resonant-mode power supplies

### Advantages


- High power density
- Suitable for surface mounting
- Easy to mount with 1 screw, (isolated mounting screw hole)

| Symbol        | Test Conditions<br>( $T_J = 25^\circ\text{C}$ unless otherwise specified) | Characteristic Values |            |                                       |
|---------------|---------------------------------------------------------------------------|-----------------------|------------|---------------------------------------|
|               |                                                                           | Min.                  | Typ.       | Max.                                  |
| $BV_{CES}$    | $I_C = 250\mu\text{A}$ , $V_{GE} = 0V$                                    | 1700                  |            | V                                     |
| $V_{GE(th)}$  | $I_C = 250\mu\text{A}$ , $V_{CE} = V_{GE}$                                | 3.0                   |            | 5.0 V                                 |
| $I_{CES}$     | $V_{CE} = 0.8 \cdot V_{CES}$<br>$V_{GE} = 0V$ $T_J = 125^\circ\text{C}$   |                       |            | 50 $\mu\text{A}$<br>500 $\mu\text{A}$ |
| $I_{GES}$     | $V_{CE} = 0V$ , $V_{GE} = \pm 20V$                                        |                       |            | $\pm 100$ nA                          |
| $V_{CE(sat)}$ | $I_C = I_{C90}$ , $V_{GE} = 15V$ , Note 1<br>$T_J = 125^\circ\text{C}$    |                       | 2.7<br>3.4 | 4.0 V                                 |


| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ unless otherwise specified)                                                            | Characteristic Values |      |                        |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------|------------------------|
|              |                                                                                                                                      | Min.                  | Typ. | Max.                   |
| $g_{fs}$     | $I_C = 10\text{A}$ , $V_{CE} = 10\text{V}$ , Note 1                                                                                  | 3.8                   | 6.3  | S                      |
| $I_{C(ON)}$  | $V_{CE} = 10\text{V}$ , $V_{GE} = 10\text{V}$                                                                                        |                       | 33   | A                      |
| $C_{ies}$    | $V_{CE} = 25\text{V}$ , $V_{GE} = 0\text{V}$ , $f = 1\text{MHz}$                                                                     |                       | 700  | pF                     |
| $C_{oes}$    |                                                                                                                                      |                       | 40   | pF                     |
| $C_{res}$    |                                                                                                                                      |                       | 14   | pF                     |
| $Q_g$        | $I_C = 10\text{A}$ , $V_{GE} = 15\text{V}$ , $V_{CE} = 0.5 \cdot V_{CES}$                                                            |                       | 32   | nC                     |
| $Q_{ge}$     |                                                                                                                                      |                       | 4    | nC                     |
| $Q_{gc}$     |                                                                                                                                      |                       | 16   | nC                     |
| $t_{d(on)}$  | Resistive load, $T_J = 25^\circ\text{C}$<br>$I_C = 10\text{A}$ , $V_{GE} = 15\text{V}$<br>$V_{CE} = 850\text{V}$ , $R_G = 16\Omega$  |                       | 30   | ns                     |
| $t_r$        |                                                                                                                                      |                       | 69   | ns                     |
| $t_{d(off)}$ |                                                                                                                                      |                       | 132  | ns                     |
| $t_f$        |                                                                                                                                      |                       | 600  | ns                     |
| $t_{d(on)}$  | Resistive load, $T_J = 125^\circ\text{C}$<br>$I_C = 10\text{A}$ , $V_{GE} = 15\text{V}$<br>$V_{CE} = 850\text{V}$ , $R_G = 16\Omega$ |                       | 30   | ns                     |
| $t_{ri}$     |                                                                                                                                      |                       | 270  | ns                     |
| $t_{d(off)}$ |                                                                                                                                      |                       | 135  | ns                     |
| $t_{fi}$     |                                                                                                                                      |                       | 495  | ns                     |
| $R_{thJC}$   | (TO-247)                                                                                                                             |                       |      | 1.1 $^\circ\text{C/W}$ |
| $R_{thCS}$   |                                                                                                                                      | 0.25                  |      | $^\circ\text{C/W}$     |

Note 1: Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .

Min Recommended Footprint

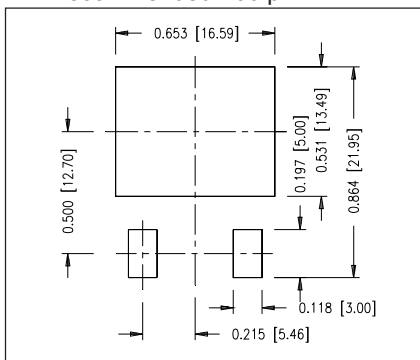


TO-247 AD Outline



Terminals: 1 - Gate 2 - Drain

| Dim.           | Millimeter |       | Inches |       |
|----------------|------------|-------|--------|-------|
|                | Min.       | Max.  | Min.   | Max.  |
| A              | 4.7        | 5.3   | .185   | .209  |
| A <sub>1</sub> | 2.2        | 2.54  | .087   | .102  |
| A <sub>2</sub> | 2.2        | 2.6   | .059   | .098  |
| b              | 1.0        | 1.4   | .040   | .055  |
| b <sub>1</sub> | 1.65       | 2.13  | .065   | .084  |
| b <sub>2</sub> | 2.87       | 3.12  | .113   | .123  |
| C              | .4         | .8    | .016   | .031  |
| D              | 20.80      | 21.46 | .819   | .845  |
| E              | 15.75      | 16.26 | .610   | .640  |
| e              | 5.20       | 5.72  | 0.205  | 0.225 |
| L              | 19.81      | 20.32 | .780   | .800  |
| L1             |            | 4.50  |        | .177  |
| ØP             | 3.55       | 3.65  | .140   | .144  |
| Q              | 5.89       | 6.40  | 0.232  | 0.252 |
| R              | 4.32       | 5.49  | .170   | .216  |

TO-268 Outline

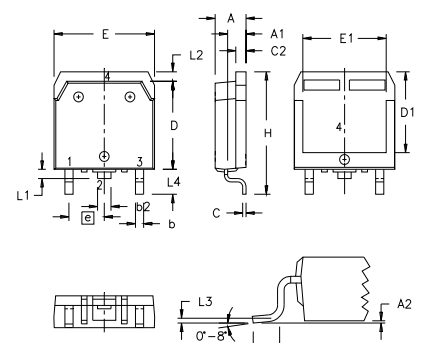

Terminals: 1 - Gate 2 - Drain


| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .193     | .201 | 4.90        | 5.10  |
| A1  | .106     | .114 | 2.70        | 2.90  |
| A2  | .001     | .010 | 0.02        | 0.25  |
| b   | .045     | .057 | 1.15        | 1.45  |
| b2  | .075     | .083 | 1.90        | 2.10  |
| C   | .016     | .026 | 0.40        | 0.65  |
| C2  | .057     | .063 | 1.45        | 1.60  |
| D   | .543     | .551 | 13.80       | 14.00 |
| D1  | .488     | .500 | 12.40       | 12.70 |
| E   | .624     | .632 | 15.85       | 16.05 |
| E1  | .524     | .535 | 13.30       | 13.60 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| H   | .736     | .752 | 18.70       | 19.10 |
| L   | .094     | .106 | 2.40        | 2.70  |
| L1  | .047     | .055 | 1.20        | 1.40  |
| L2  | .039     | .045 | 1.00        | 1.15  |
| L3  | .010 BSC |      | 0.25 BSC    |       |
| L4  | .150     | .161 | 3.80        | 4.10  |

IXYS reserves the right to change limits, test conditions, and dimensions.


IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

|           |           |           |           |              |              |              |              |              |             |
|-----------|-----------|-----------|-----------|--------------|--------------|--------------|--------------|--------------|-------------|
| 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665    | 6,404,065 B1 | 6,683,344    | 6,727,585    | 7,005,734 B2 | 7,157,338B2 |
| 4,850,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123 B1 | 6,534,343    | 6,710,405 B2 | 6,759,692    | 7,063,975 B2 |             |
| 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728 B1 | 6,583,505    | 6,710,463    | 6,771,478 B2 | 7,071,537    |             |


**Fig. 1. Output Characteristics**  
**@ 25°C**

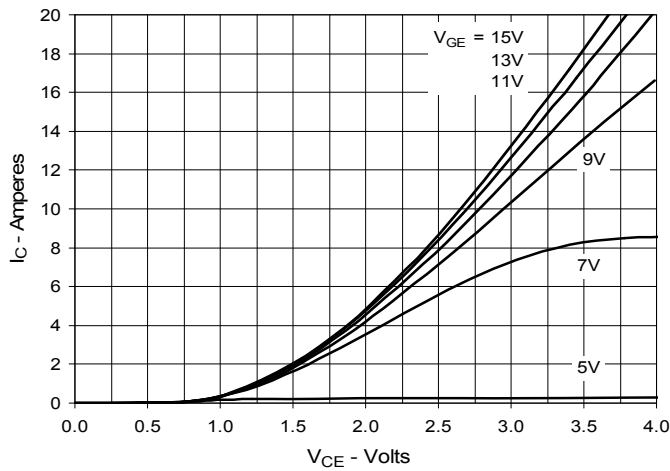


**Fig. 2. Extended Output Characteristics**  
**@ 25°C**

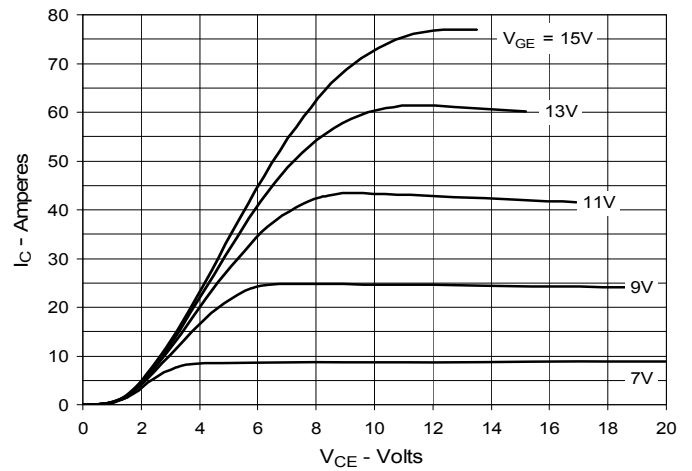


**Fig. 3. Output Characteristics**  
**@ 125°C**

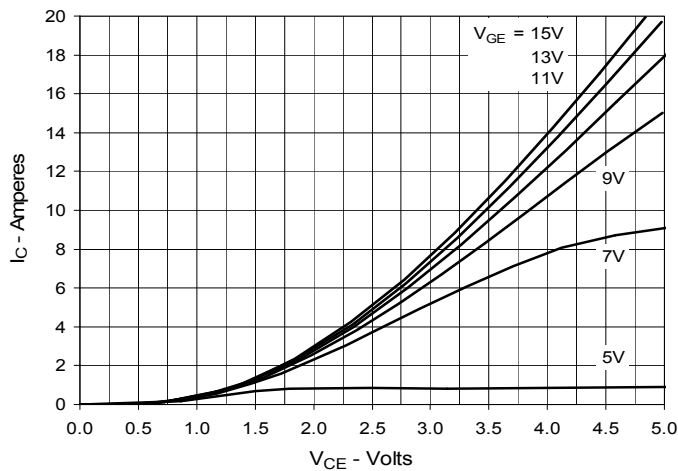


**Fig. 4. Dependence of  $V_{CE(sat)}$  on**  
**Junction Temperature**

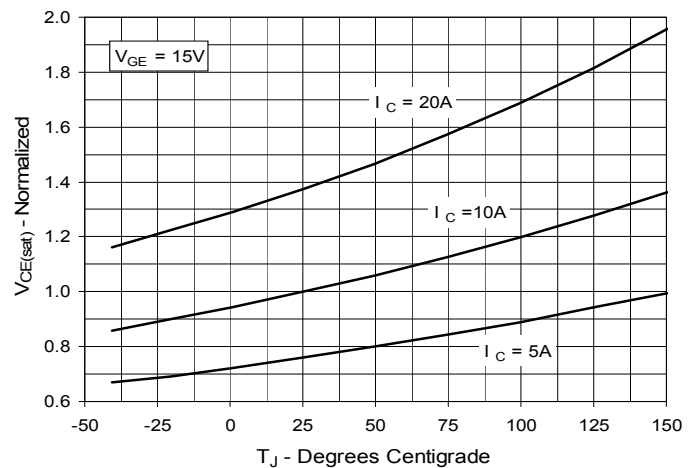


**Fig. 5. Collector-to-Emitter Voltage**  
**vs. Gate-to-Emitter Voltage**

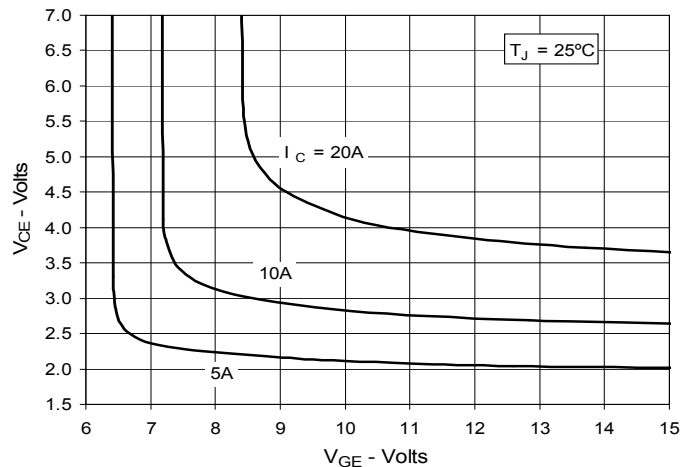


**Fig. 6. Input Admittance**

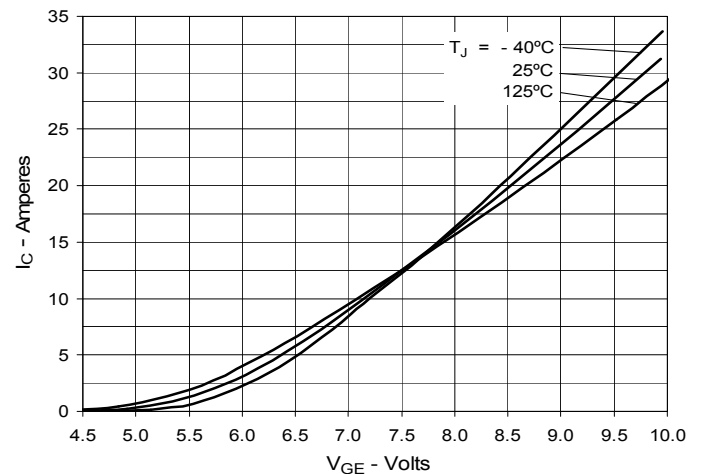


**Fig. 7. Transconductance**

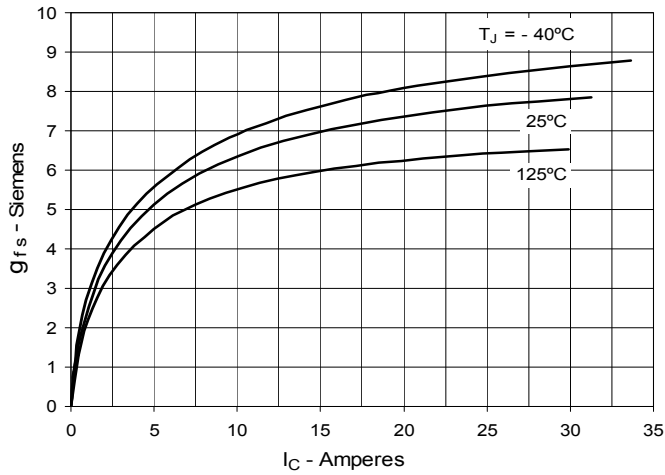


**Fig. 8. Gate Charge**

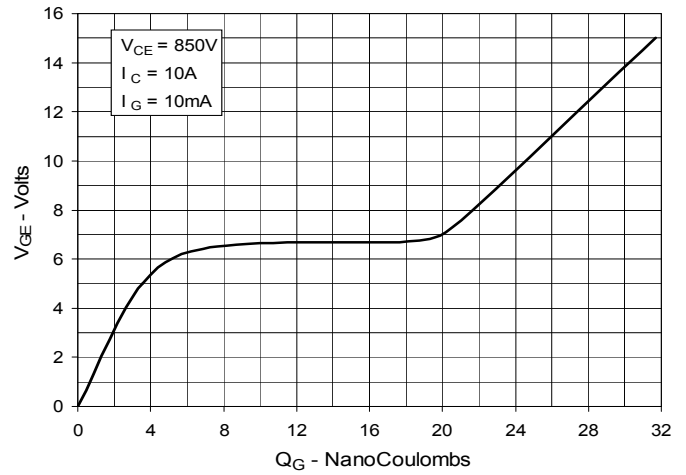


**Fig. 9. Reverse-Bias Safe Operating Area**

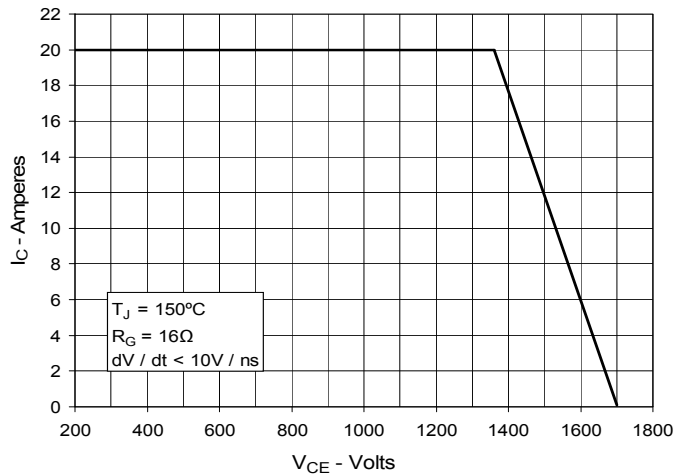


**Fig. 10. Capacitance**

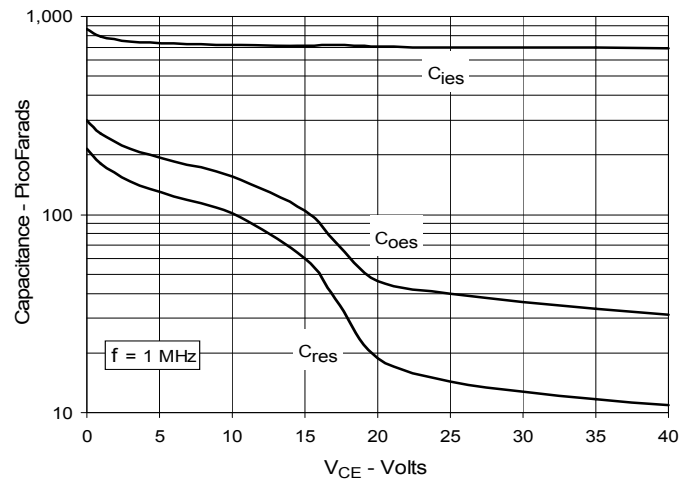


**Fig. 11. Maximum Transient Thermal Impedance**

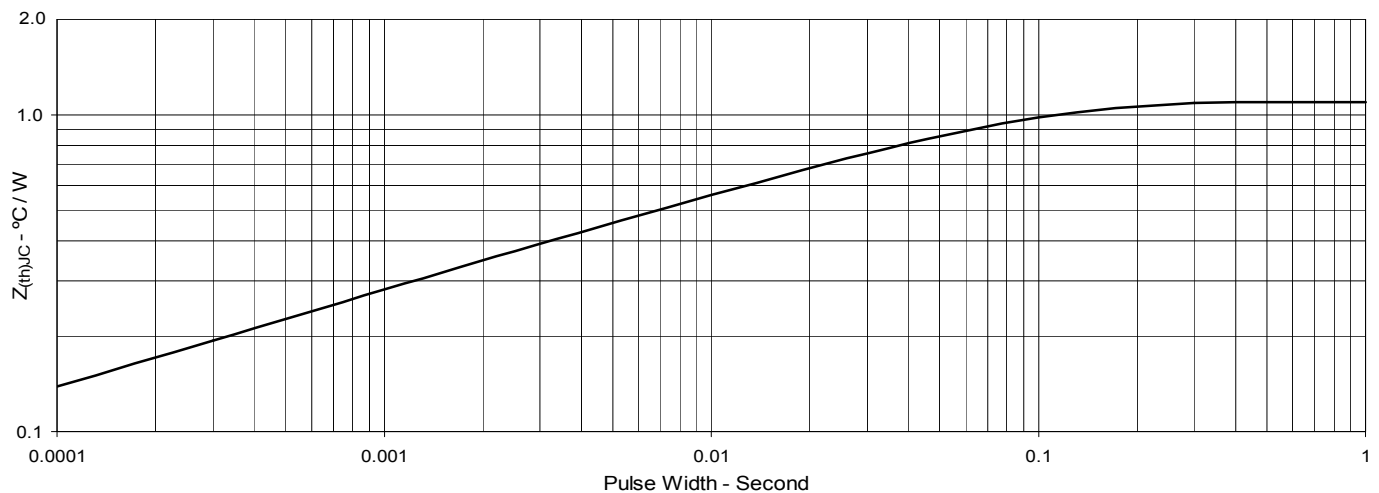


**Fig. 12. Resistive Turn-on Rise Time vs. Junction Temperature**

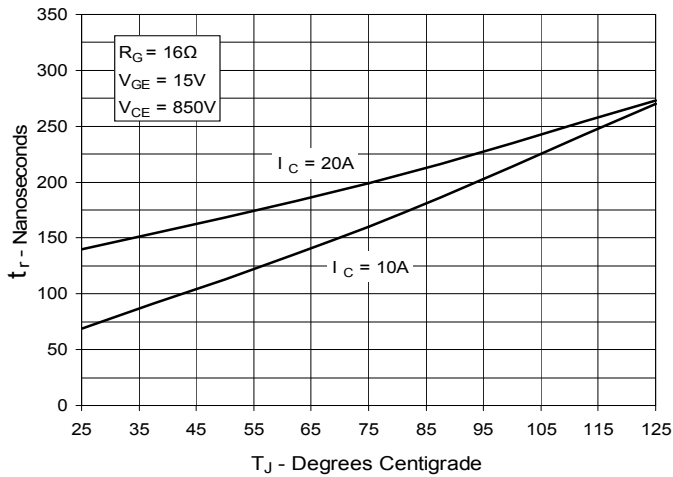


**Fig. 13. Resistive Turn-on Rise Time vs. Collector Current**

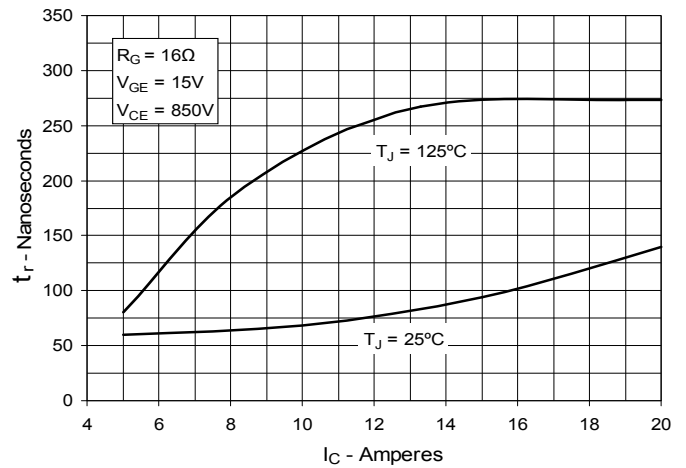


**Fig. 14. Resistive Turn-on Switching Times vs. Gate Resistance**

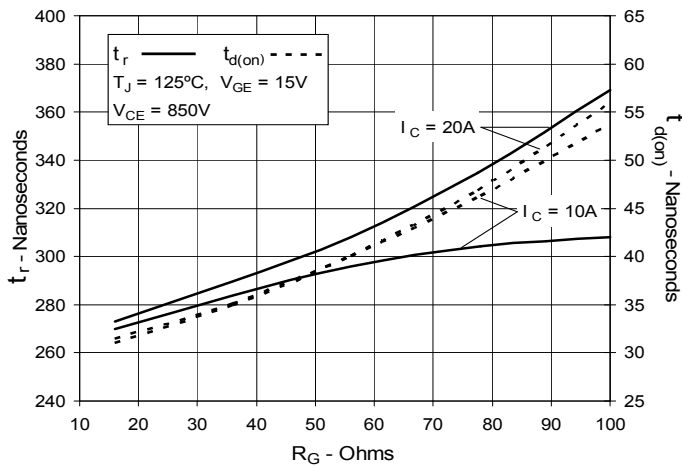


**Fig. 15. Resistive Turn-off Switching Times vs. Junction Temperature**

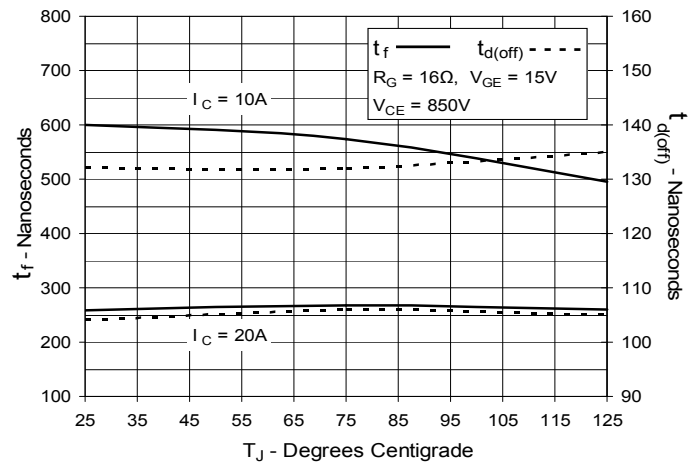

**Fig. 16. Resistive Turn-off Switching Times vs. Collector Current**

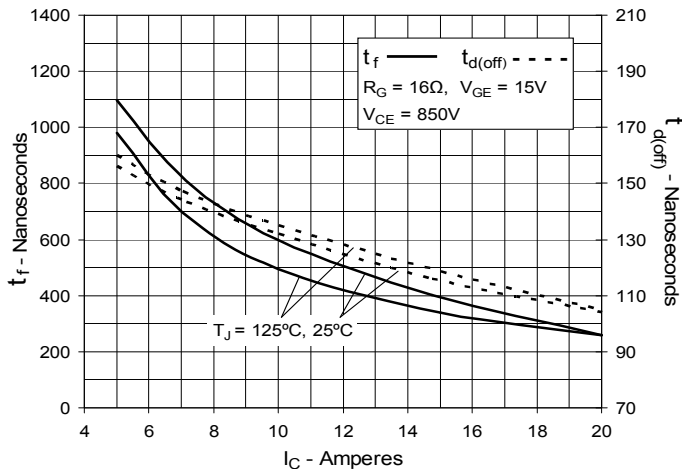

**Fig. 17. Resistive Turn-off Switching Times vs. Gate Resistance**

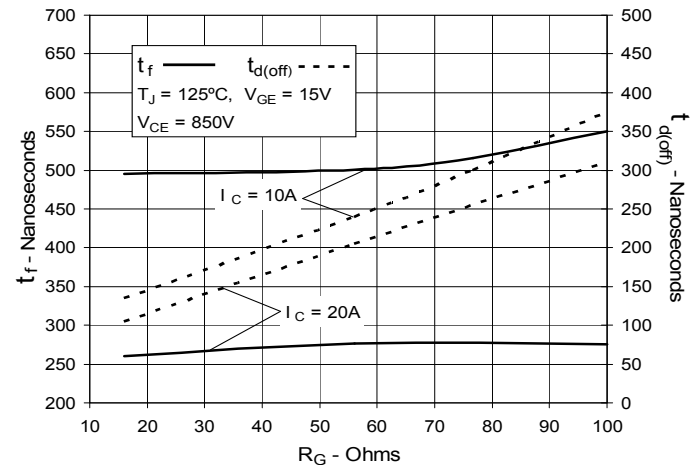

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email      mkt@ameya360.com