

RSF
RS F64 LP3R 3/66**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Passive interfaces for signal transmission on a flat-cable connector equipped with a clamping-yoke connection in accordance with IEC 603-1 / DIN 41651.

The main features include:

- Group with 10- to 64-pole connectors
- One-to-one electrical connection between controller and field connections.
- Very compact triple-level modules can be attached to conventional TS35 or TS32 mounting rails.
- Longer attachment hooks
- Pin for the earth connection.

General ordering data

Type	RS F64 LP3R 3/66
Order No.	8012970000
Version	Interface, RSF, Connector according IEC60603-13/DIN41651, 64-pole, Screw connection
GTIN (EAN)	4008190154615
Qty.	1 pc(s).

RSF
RS F64 LP3R 3/66

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Length	120 mm	Width	87 mm
Height	76 mm	Net weight	297 g

Temperatures

Operating temperature	0...+55°C	Storage temperature	-40...+70 °C
-----------------------	-----------	---------------------	--------------

Connection Data

Connection on control side	Connector according IEC60603-13/DIN41651	Number of poles (control side)	64-pole
Connection (field side)	LP3R 5.08mm	Earthing	Yes
Protective earth connection	Flat-blade contact		

Rating data

Rated voltage	60 V AC / 75 V DC	Rated current per connection	1 A
---------------	-------------------	------------------------------	-----

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	100 V
Surge voltage category	II	Pollution severity level	2
Pulse voltage test (1,2/50µs)	0.8 kV		

Connection field

Type of connection	Screw connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	6 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible with sleeve, max.	2.5 mm ²
Flexible with sleeve, min.	0.5 mm ²	Sleeve with plastic collar, max.	2.5 mm ²
Min. wire cross-section, AWG [field]	AWG 26	Max. wire cross-section, AWG [field]	AWG 12
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.6 Nm
Stripping length	6 mm		

Classifications

ETIM 3.0	EC001419	UNSPSC	30-21-18-01
eClass 5.1	27-24-22-04	eClass 6.2	27-24-22-04
eClass 7.1	27-24-22-04		

Product information

Descriptive text accessories	Refer to the "Universal cables PAC-UNIV" section in this chapter
------------------------------	--

Approvals

Approvals




ROHS	Conform
------	---------

RSF RS F64 LP3R 3/66

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

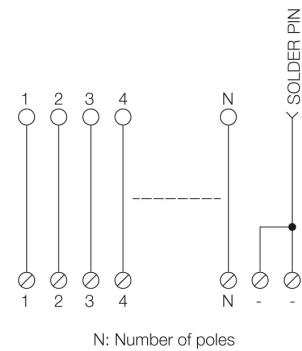

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com