

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

SPECIFICATIONS




VOLTAGE & CURRENT:	DC 24 V, 30 A
WITHSTANDING VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 M Ω OR MORE AT DC 500 V
TEMPERATURE RANGE:	-40 °C ~+105 °C
SCREW TORQUE VALUE:	10 Kgf.cm
WIRE RANGE:	22 - 12 AWG
1) MOLDED PARTS:	Thermoplastic (UL 94 V-0)BLACK
2) TERMINAL:	BRASS, 1.5t, Tin PLATED
3) TERMINAL SCREWS:	STEEL, Ni PLATED, M5

APPROVAL: () Pending


RoHS Compliant

PART NUMBER:

OSTYK11E03030

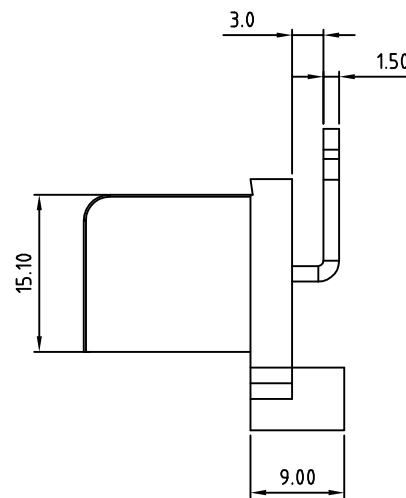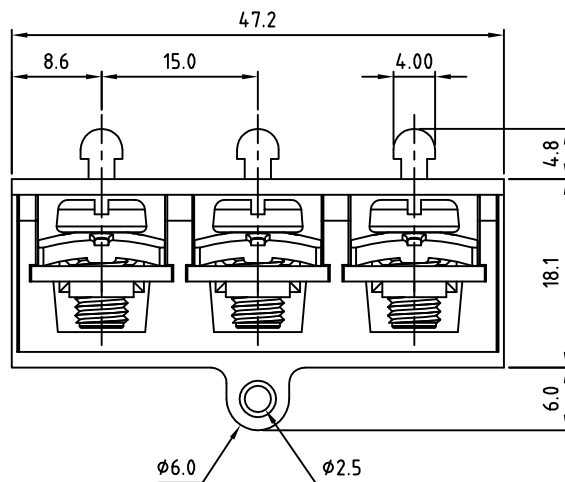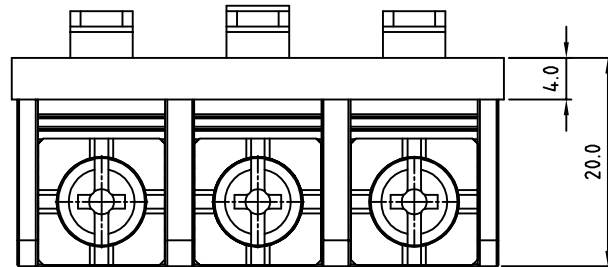

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

 ON-SHORE TECHNOLOGY, INC.							
TITLE		OSTYK-11E-3P					
PART NO.		OSTYK11E03030			DWG NO.	OSTYK11E03030.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
Shi Jun 2007.07.18	Seamus 2007.07.18	LUCY 2007.7.18	LUCY 2007.7.18			UNIT: mm	X. ±0.50
						SCALE: NONE	X.XX ±0.30
				SHEET: 01/01		REV: D	X° ±0.10
						X° ±1°	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com