


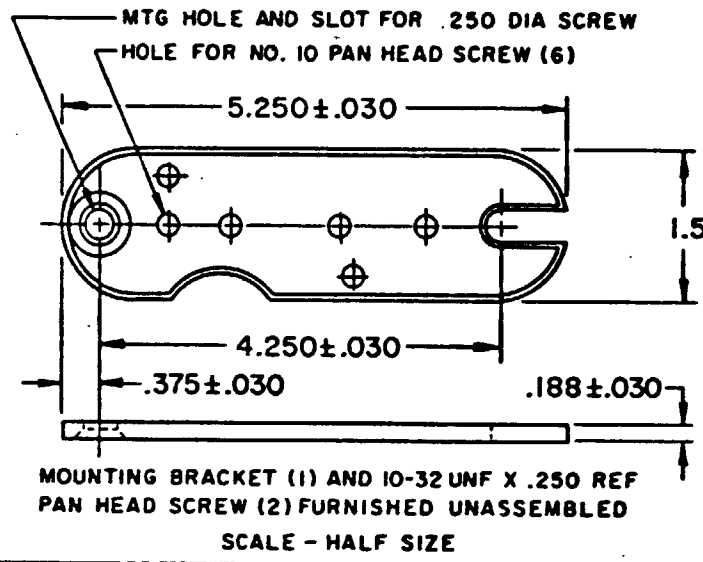
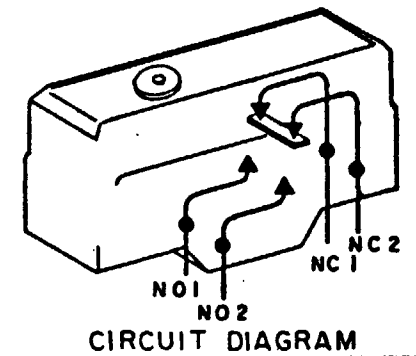
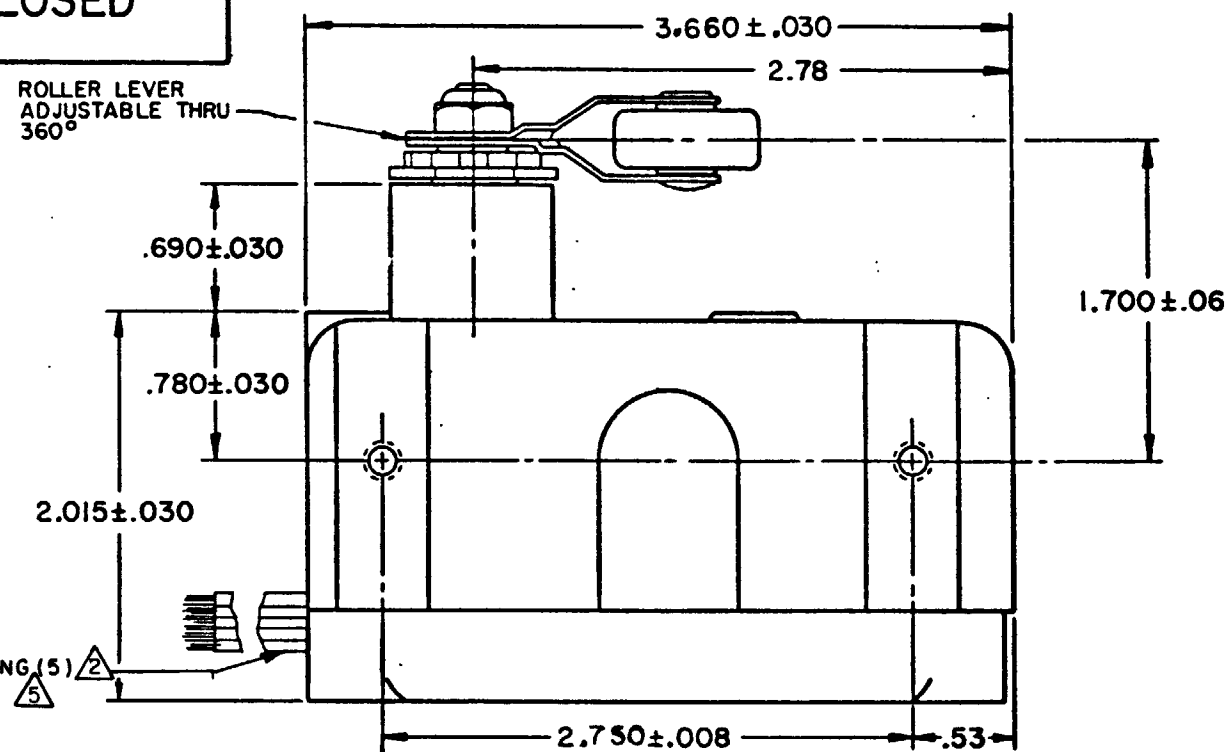


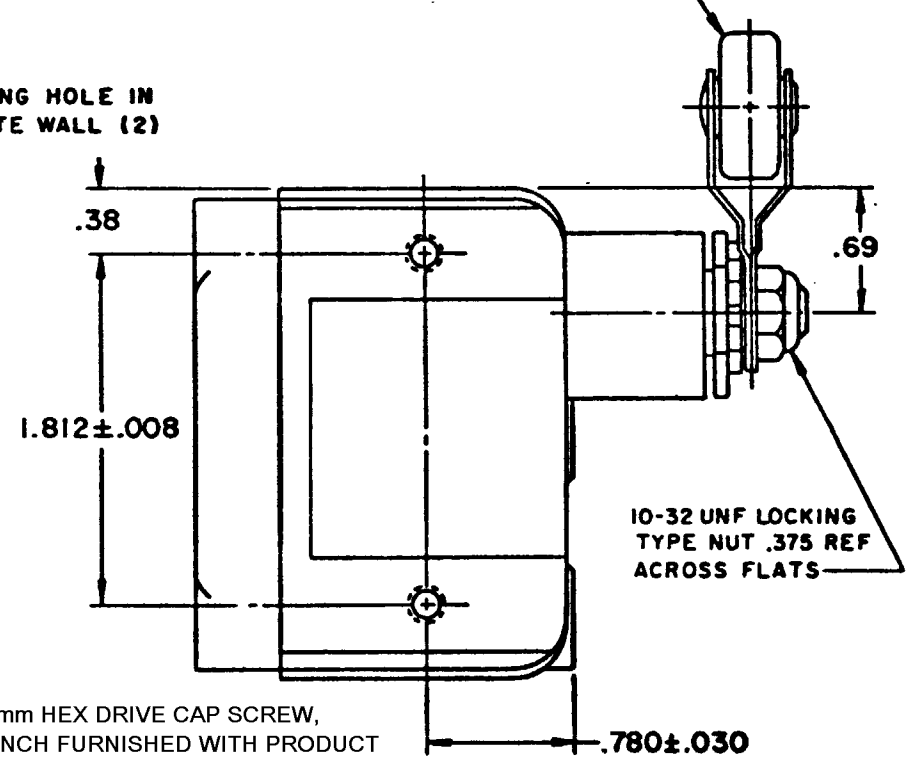

NO.14 LEADS PVC INSULATION 180.000 MIN BEYOND HOUSING (5) (2)

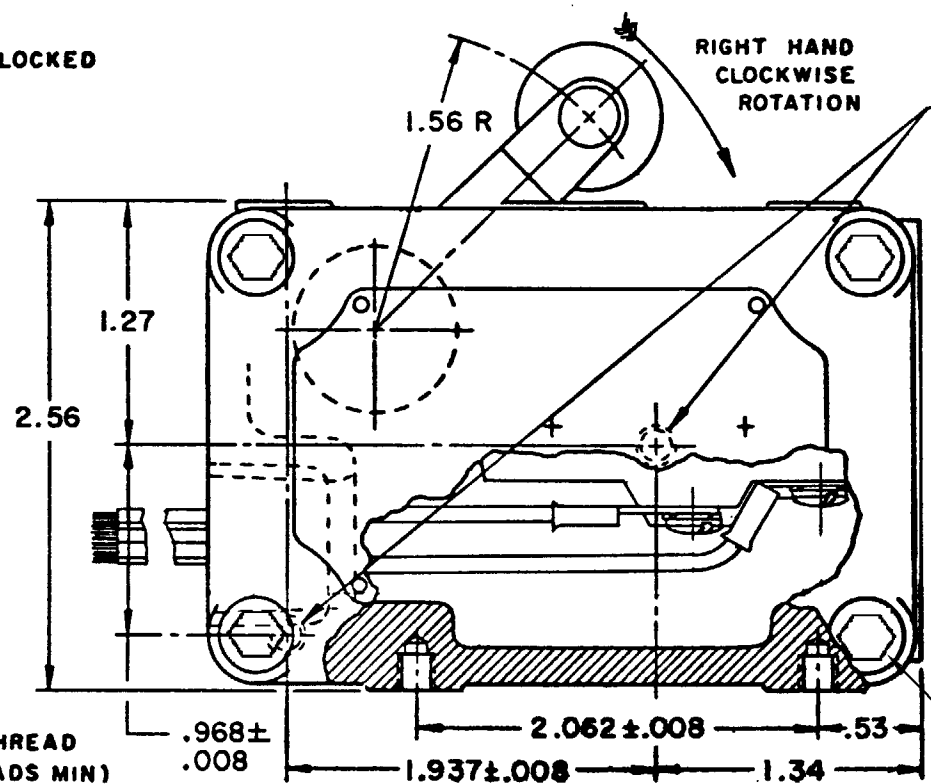

.750 REF DIA X .312 REF WIDE
ROLLER MADE OF NON-SPARKING
WEAR RESISTANT MATERIAL

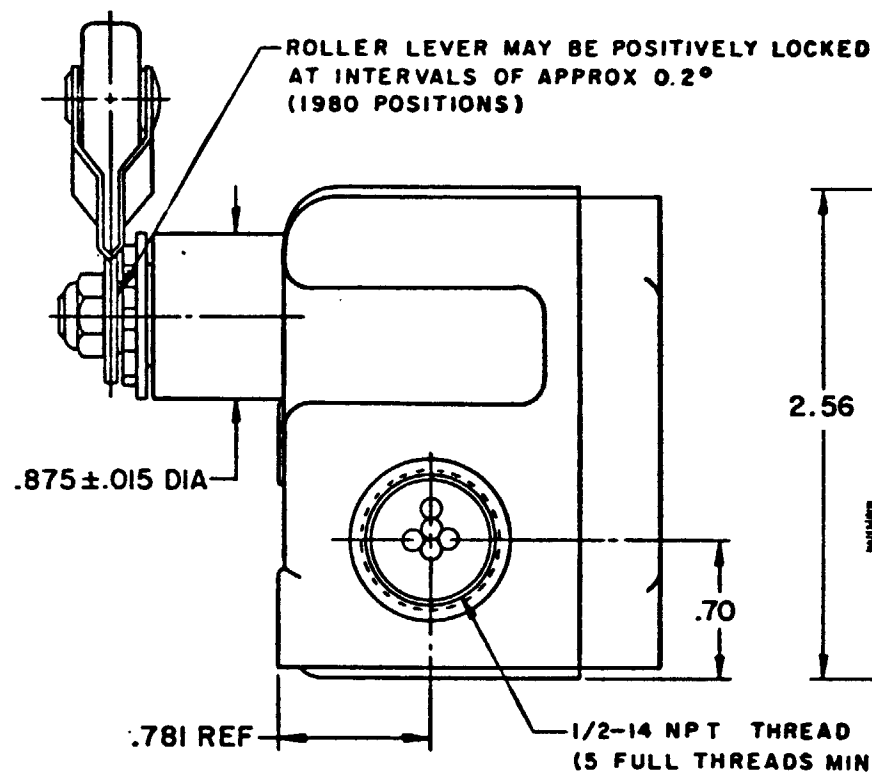

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

SCALE FULL

NOTES

CHARACTERISTICS

OPERATING FORCE ----- 12-24 OZ

RELEASE FORCE ----- 4 OZ MIN

PRETRAVEL ----- 8° (.219 MAX)

DIFFERENTIAL TRAVEL - 3/4" (.021 MAX)

OVERTRAVEL ----- DO NOT OVERTRAVEL
MORE THAN 90°

ELECTRICAL DATA

CONTACT ARRANGEMENT

SEE CIRCUIT DIAGRAM

15A-125, 250 OR 480 VAC
1A-125 VDC; 0.5A-250 VDC
1/4 HP-125 VAC; 1/2 HP-250 VAC
CODE L73

DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DIMEN UNITS. CONVERSIONS AND ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 5			
	IN.	IN.	IN.
	FR.	FR.	FR.
NO PLACES	5	1/16	0.031
ONE PLACE	2.5	0.005	0.016
TWO PLACES	1.25	0.0025	0.008
THREE PLACES			0.004
ANGLES			15 MIN

DESIGN UNITS		CONVERSIONS	
IN	FR	IN	FR
1	25.4	1	25.4
1/16	1.5875	1/16	1.5875
1/8	3.175	1/8	3.175
3/16	4.7625	3/16	4.7625
1/4	6.35	1/4	6.35
5/16	7.9375	5/16	7.9375
3/8	9.525	3/8	9.525
7/16	11.1125	7/16	11.1125
1/2	12.7	1/2	12.7
9/16	14.2875	9/16	14.2875
5/8	15.875	5/8	15.875
11/16	17.4625	11/16	17.4625
3/4	19.05	3/4	19.05
7/8	22.225	7/8	22.225
1	25.4	1	25.4

ALL MATERIAL-COMMERCIAL SPECIFICATIONS
MILCO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT

- 1 - MOUNTING SCREW HOLES, 10-32 UNF-2B THREADS X .219 REF. DEEP (8)
- 2 - LEAD WIRES 105°C MAX
- 3 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH ROLLER
- 4 - EXPLOSION PROOF-UNDERWRITER'S LAB INC LISTING FOR HAZARDOUS LOCATIONS, NEMA 7, CLASS I, GROUP C & D, NEMA 9, CLASS II, GROUPS E, F, & G
- 5 - N.O. LEADS - BLUE
N.C. LEADS - RED
GROUND LEAD - GREEN
- 6 - SEAL RATING: NEMA 1

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com