


High Speed Fiber Optic Transmitter

OPF1412, OPF1412T, OPF1414, OPF1414T



Features:


- Low cost
- High speed
- No mounting hardware required
- Wide temperature range
- 100% LED burn-in (96 hours)
- SMA or ST style ports
- Wave solderable

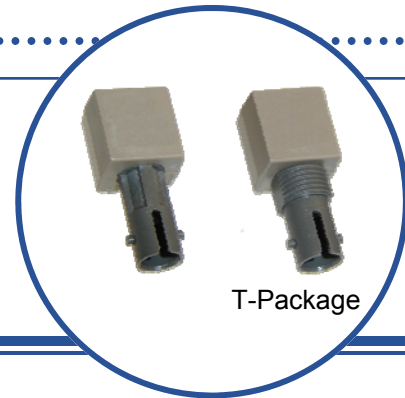

Description:

The OPF1412 and OPF1414 series fiber optic transmitters contain a high speed 840 nm GaAlAs LED. This LED in conjunction with the package lensing is designed to efficiently couple light into multimode optical fibers ranging in size from 50/125 μm up to 200/230 μm . The high coupling efficiency of the LED and lensing allows the devices to be used at low current drive levels thus decreasing the power consumption and increasing system reliability. The consistency of coupling varies by less than 5 dB from part to part which reduces the dynamic range requirements of the receiver. The high power (-16.0 dBm into 50/125 μm) OPF1414 was designed for small fiber applications or where there are large fixed losses such as in systems that contain star couplers or in line connectors. The OPF1412 (-12.0 dBm optical power) is ideal for 100/140 μm fiber applications.

For custom electrical and optical requirements contact your local representative or OPTEK for more information.

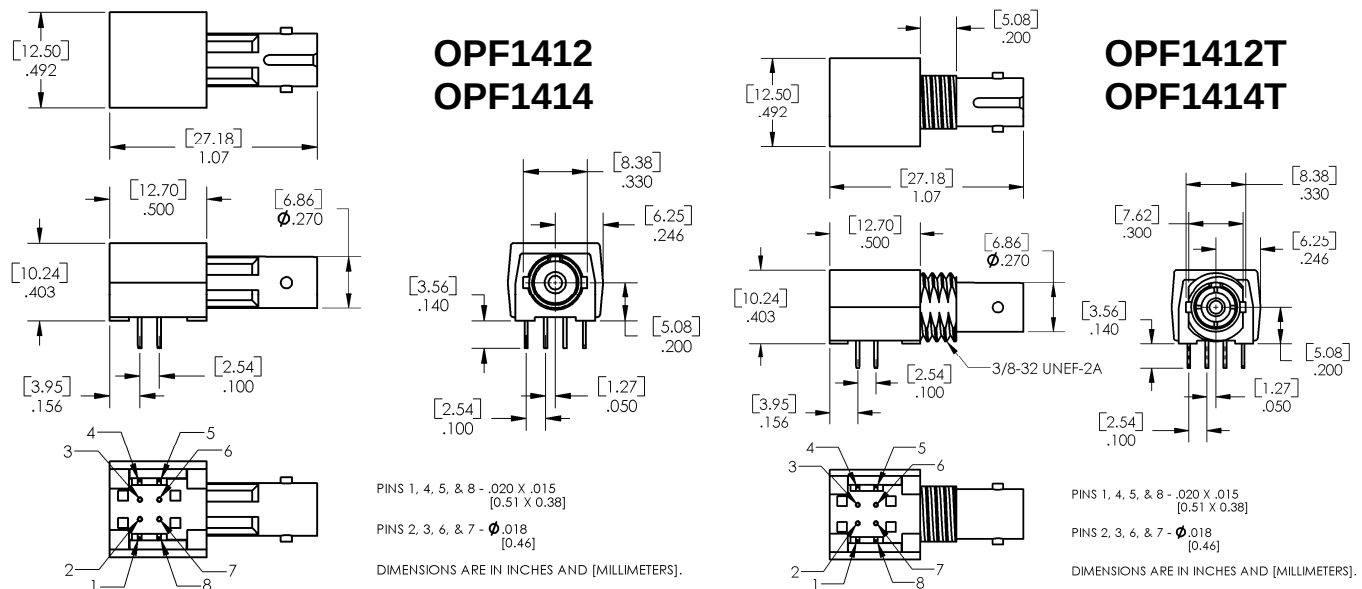

Pin #	Description	Pin #	Description
1	No Connection	8	No Connection
2	Anode	7	Anode
3	Cathode	6	Anode
4	No Connection	5	No Connection

Part Number	Typ. dBm into 50/125 μm @ 60mA	Typ. dBm into 100/140 μm @ 60mA
OPF1412	-16.0	-12.0
OPF1412T	-16.0	-12.0
OPF1414	-12.0	-6.5
OPF1414T	-12.0	-6.5



RoHS

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

High Speed Fiber Optic Transmitter

OPF1412, OPF1412T, OPF1414, OPF1414T



Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Storage Temperature Range	-55°C to +85°C
Operating Temperature Range	-40°C to +85°C
Forward Input Current	Peak 200 mA DC 100 mA
Reverse Input Voltage	1.8 V
Lead Soldering Temperature (1/16" (1.6 mm) from case for 5 seconds with soldering iron) ⁽¹⁾	260° C

Notes:

(1) All parameters tested using pulse technique.

Electrical Characteristics ($T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ unless otherwise noted) Typ. values are at 25°C .


Symbol	Parameter	Min	Typ	Max	Units	Test Conditions
V_F	Forward Voltage	1.48	1.70 1.84	2.09	V	$I_F = 60\text{ mA}$ $I_F = 100\text{ mA}$
V_F/T	Forward Voltage Temperature Coefficient		-0.20		mV/°C	$I_F = 60\text{ mA}$
V_{BR}	Reverse Input Voltage	1.8	3.8		V	$I_R = 100\text{ }\mu\text{A}$
λ_p	Peak Emission Wavelength	820	840	865	nm	$I_F = 60\text{ mA}$
C_T	Diode Capacitance		55		pF	$V = 0, f = 1\text{ MHz}$
P_T/T	Optical Power Temperature Coefficient		-0.008 -0.020		dB/°C	$I_F = 60\text{ mA}$ $I_F = 100\text{ mA}$
t_r, t_f	Rise Time, Fall Time (10% to 90%)		4.0	6.5	ns	$I_F = 60\text{ mA}$, no pre-bias

Peak Output Optical Power


Symbol	Parameter	1412			1414			Unit	Test Condition
		Min	Typ	Max	Min	Typ	Max		
P_{T100}	100/140 μm Fiber Cable N.A. = 0.30	-15.0 -16.0 -13.5 -15.1	-12.0 -10.0	-10.0 -9.0 -7.6 -7.0	-9.5 -10.5 -8.0 -9.6	-6.5 -4.5	-4.5 -3.5 -2.1 -1.5	dBm	$I_F = 60\text{ mA}, T_A = 25^\circ\text{C}$ $I_F = 100\text{ mA}, T_A = 25^\circ\text{C}$
P_{T62}	62.5/125 μm Fiber Cable N.A. = 0.275	-19.0 -20.0 -17.5 -19.1	-16.0 -14.0	-14.0 -13.0 -11.6 -11.0	-15.0 -16.0 -13.5 -15.1	-12.0 -10.0	-10.0 -9.0 -7.6 -7.0	dBm	$I_F = 60\text{ mA}, T_A = 25^\circ\text{C}$ $I_F = 100\text{ mA}, T_A = 25^\circ\text{C}$
P_{T50}	50/125 μm Fiber Cable N.A. = 0.20	-21.8 -22.8 -20.3 -21.9	-18.8 -16.8	-16.8 -15.8 -14.4 -13.8	-18.8 -19.8 -17.3 -18.9	-15.8 -13.8	-13.8 -12.8 -11.4 -10.8	dBm	$I_F = 60\text{ mA}, T_A = 25^\circ\text{C}$ $I_F = 100\text{ mA}, T_A = 25^\circ\text{C}$

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

**Relative Coupled Power vs
Forward Current**

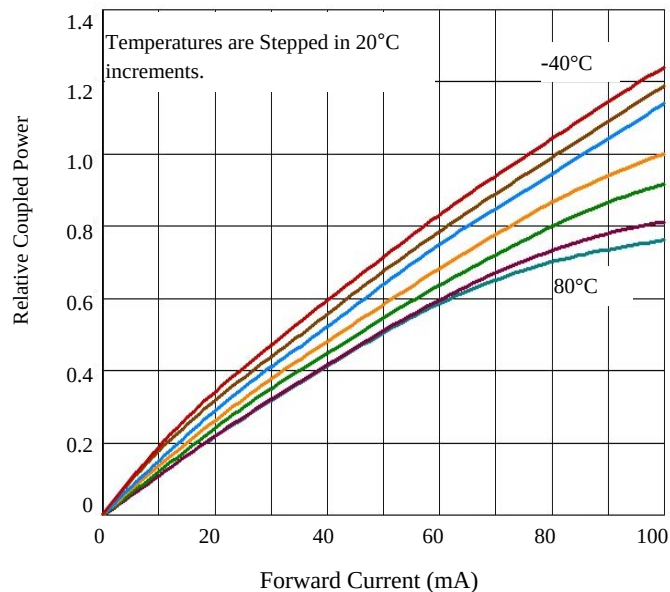

**Typical Forward Voltage vs
Forward Current**

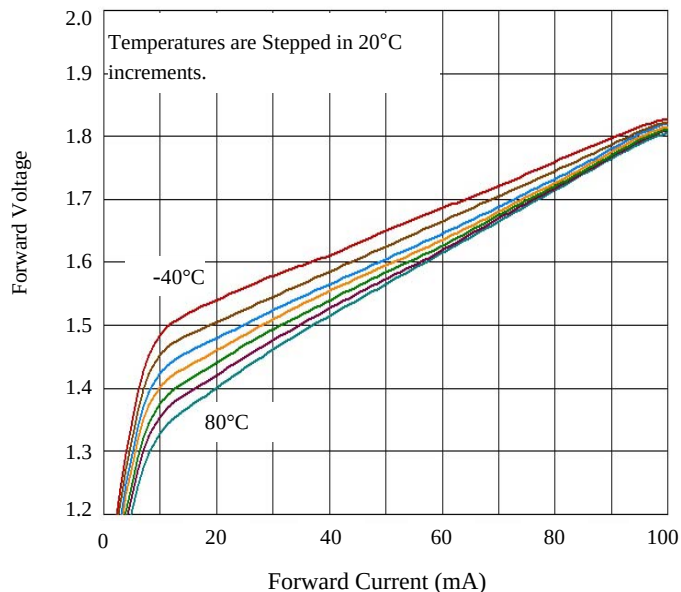

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com