

FP24-1000

Electrical Specifications (@25C)

1. Maximum Power: 24.0 VA
2. Primary Voltage:
 - Series: 230V @ 50/60 Hz
 - Parallel: 115V @ 50/60Hz
3. Secondary:
 - Series: 24.0VCT @ 1.00Amps
 - Parallel: 12.0V @ 2.00Amps

Description:

The FP24-1000 is part of a series which has a long history of reliable service in the field, made from a proven design and constructed with UL recognized materials.

Construction:

Wound on two dual channel nylon bobbin. Materials are UL recognized, Class B (130° C) rated.

Safety:

These products are 100% hipot tested with an insulation of 2000V between primary and secondary windings and 1500V between the primary / secondary windings and the core.

Agency File:

UL: File E53148, UL 506, Class B General Purpose Transformer,
 cUL: File E53148, UL 506, Class B General Purpose Transformer, Canadian Use




Dimensions:

A	B	C	D	E	F	G
2.87	2.25	1.375	0.267	0.600	0.531	1.90

Units: In inches



Weight: 15.0 oz
 Pin Dimension: .020 x .041 in

Schematic:



RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

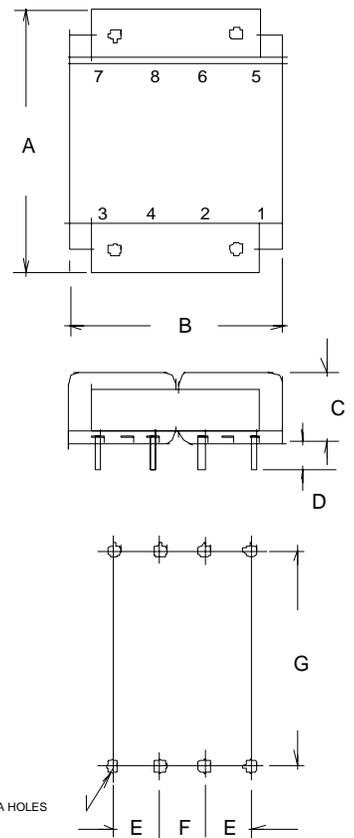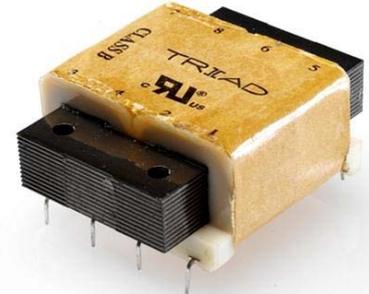

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com