


Panasonic

ideas for life

**Compact high capacity,
(25A max)
Slim heat sink combined
type added**

AQ-J RELAYS

New

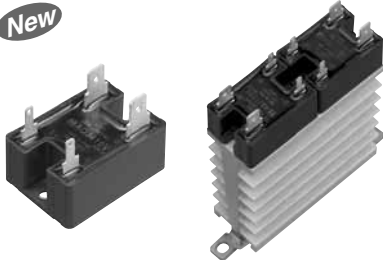

Slim heat sink combined type

Compliance with RoHS Directive

FEATURES


- 1. Compact Size**
Approx 40% reduction in required space achieved in the footprint area compared with the previous model (AQ-R relay)
- 2. Built-in varistor**
- 3. Reverse input connection prevention function**
- 4. Labor Saving (tab terminal)**
- 5. Heat sink combined types ready to mount on DIN rail added (Radiating grease and screws assembly process not needed)**
- 6. Output arrangement 1a and 1a × 2 available in the heat sink combined type**

Note: * International standards are acquired for AQ-J SSR stand-alone, not applied to heat sink combined type.

TYPICAL APPLICATIONS

- 1. Kitchen appliances**
- 2. Vending machine**
- 3. Injection molding machine**
- 4. Packing machine**
- 5. Amusement machine**

ORDERING INFORMATION

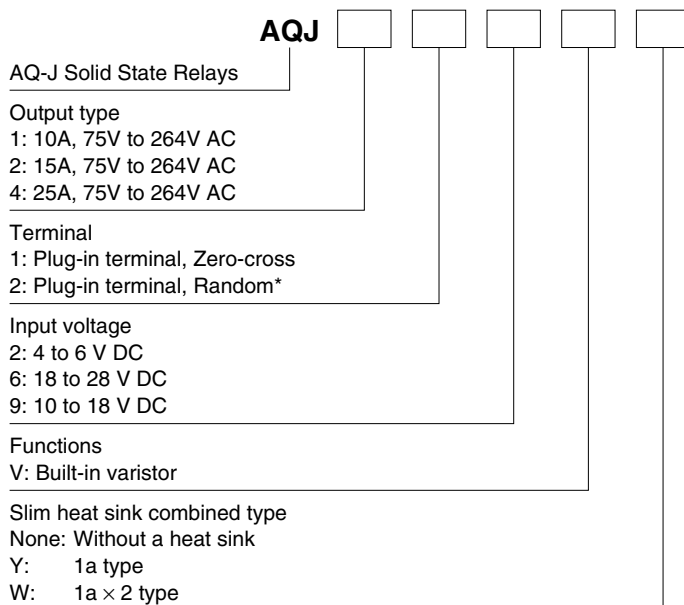

Note: * Random type is available by custom order.

TYPES

1. AQ-J Solid State Relays

Type	Load current	Load voltage	Input voltage	Part No.
Zero-cross*	10A	75V to 264V AC	4 to 6V DC	AQJ112V
			10 to 18V DC	AQJ119V
			18 to 28V DC	AQJ116V
	15A		4 to 6V DC	AQJ212V
			10 to 18V DC	AQJ219V
			18 to 28V DC	AQJ216V
	25A		4 to 6V DC	AQJ412V
			10 to 18V DC	AQJ419V
			18 to 28V DC	AQJ416V

Standard Packing; carton: 10 pcs., case: 200 pcs.

Note: * Random type also available. Please inquire.

AQ-J

2. AQ-J SSR Slim Heat Sink Combined Type

Output configuration	Type	Load current	Load voltage	Input voltage	Part No.
1a	Zero-cross*	10A	75V to 264V AC	4 to 6V DC	AQJ112VY
				10 to 18V DC	AQJ119VY
				18 to 28V DC	AQJ116VY
1a × 2		20A		4 to 6V DC	AQJ412VY
				10 to 18V DC	AQJ419VY
				18 to 28V DC	AQJ416VY
		10A (per 1a)		4 to 6V DC	AQJ112VW
				10 to 18V DC	AQJ119VW
				18 to 28V DC	AQJ116VW
		15A (per 1a)		4 to 6V DC	AQJ412VW
				10 to 18V DC	AQJ419VW
				18 to 28V DC	AQJ416VW

Standard Packing; no carton, case: 10 pcs.
Note: * Random type also available. Please inquire.

3. Accessories

Type	Part No.	Packaged quantity
Slim heat sink (28mm wide) (Mountable on a DIN rail)	AQP-HS-SJ10A	No carton, 10 in a case
Slim heat sink (45mm wide) (Mountable on a DIN rail)	AQP-HS-SJ20A	No carton, 8 in a case
Standard heat sink (10A and 15A)	AQP-HS-J10A	5 in a carton, 20 in a case
Standard heat sink (25A only)	AQP-HS-J25A	No carton, 5 in a case
DIN rail mounting plate	AQP-DPJ	5 in a carton, 50 in a case

SPECIFICATIONS

1. Ratings (Test sample: AQ-J stand-alone, Measurement condition: at 20°C 68°F, input ripple: 1% or less)

1) Input side

Part No.	AQJ112V AQJ212V AQJ412V	AQJ119V AQJ219V AQJ419V	AQJ116V AQJ216V AQJ416V
Item			
Rated voltage	5V DC	12V DC	24V DC
Input voltage	4 to 6V DC	10 to 18V DC	18 to 28V DC
Input impedance	Approx. 0.26kΩ	Approx. 0.8kΩ	Approx. 1.6kΩ
Drop-out voltage	Min. 1V DC		

2) Output side

Part No.	AQJ112V AQJ119V AQJ116V	AQJ212V AQJ219V AQJ216V	AQJ412V AQJ419V AQJ416V
Item			
Max. load current*1	10A	15A	25A
Load voltage	75 to 264V AC		
Frequency	45Hz to 65Hz		
Non-repetitive surge current	100A	150A	250A
Max. "OFF-state" leakage current	Max. 5mA		
Max. "ON-state" voltage drop	Max. 1.6V		
Min. load current*2	50mA		

Notes: *1 Refer to REFERENCE DATA "1. Load current vs. ambient temperature" .
*2 When the load current is less than the rated minimum load current, please refer to "Cautions for Use of SSR".

2. Ratings (Test sample: AQ-J slim heat sink combined type, Measurement condition: at 20°C 68°F, input ripple: 1 % or less)

1) Input side

Part No.	AQJ112V(Y-W) AQJ412V(Y-W)	AQJ119V(Y-W) AQJ419V(Y-W)	AQJ116V(Y-W) AQJ416V(Y-W)
Item			
Rated voltage	5V DC	12V DC	24V DC
Input voltage	4 to 6V DC	10 to 18V DC	18 to 28V DC
Input impedance	Approx. 0.26kΩ	Approx. 0.8kΩ	Approx. 1.6kΩ
Drop-out voltage	Min. 1V DC		

2) Output side

Part No.	AQJ112VY AQJ119VY AQJ116VY	AQJ412VY AQJ419VY AQJ416VY	AQJ112VW AQJ119VW AQJ116VW	AQJ412VW AQJ419VW AQJ416VW
Item				
Output arrangement	1a		1a × 2	
Max. load current*1	10A	20A	10A	15A
Load voltage	75 to 264V AC			
Frequency	45Hz to 65Hz			
Non-repetitive surge current	100A	250A	100A	250A
Max. "OFF-state" leakage current	Max. 5mA			
Max. "ON-state" voltage drop	Max. 1.6V			
Min. load current*2	50mA			

Notes: *1 Refer to REFERENCE DATA "1. Load current vs. ambient temperature" .
*2 When the load current is less than the rated minimum load current, please refer to "Cautions for Use of SSR".

3. Characteristics (Measurement condition: at 20°C 68°F, input ripple: 1% or less)

Item	Characteristics	Remarks
Operate time, max.	1/2 cycle of voltage sine wave + 1ms	
Release time, max.	1/2 cycle of voltage sine wave + 1ms	
Insulation resistance, min.	100M Ω between input, output and case	at 500 V DC
Breakdown voltage	3,000 Vrms between input and output 2,500 Vrms between input, output and case	for 1min.
Vibration resistance	SSR stand-alone: 10 to 55Hz, double amplitude of 1.5mm Slim heat sink combined type: 10 to 55Hz, double amplitude of 0.75mm	X, Y, Z axes
Shock resistance	SSR stand-alone: Min. 980m/s ² Slim heat sink combined type: Min. 197m/s ²	X, Y, Z axes
Ambient temperature	-30 to +80°C -22 to +176°F	Non-condensing at low temperatures
Storage temperature	-30 to +100°C -22 to +212°F	
Operational method	Zero-cross (Turn ON and Turn OFF)	

REFERENCE DATA

(1) AQ-J Solid State Relays

1. Load current vs. ambient temperature Use load current within range specified in the figure below

Tested condition:

1) If attached to a heat sink, use a heat conductive compound (Ex. Toshiba silicone YG6111 or TSK5303) of similar coating to improve cooling


2) Without external heat sink

If the mounting surface is not metallic and a heat sink is not used, expose the bottom surface and plate surface to improve heat dissipation.


3) The current value is per 1 a.

(A) slim heat sink	AQP-HS-SJ20A
(B) slim heat sink	AQP-HS-SJ10A
(C) standard heat sink	AQP-HS-J10A
(D) DIN rail mounting plate	AQP-DPJ
(E) standard heat sink	AQP-HS-J25A


(1) 10 A type (when using heat sink or iron plate)

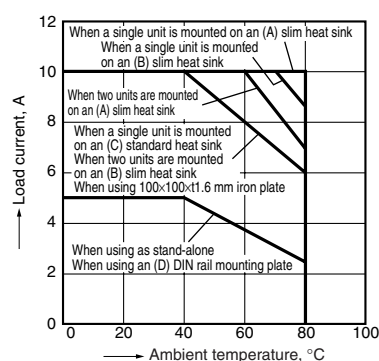


(2)-1. 15 A type (when using iron plate)

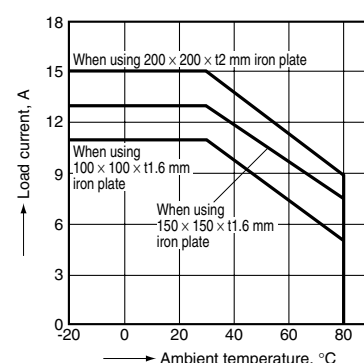


(2)-2. 15 A type (when using a heat sink)

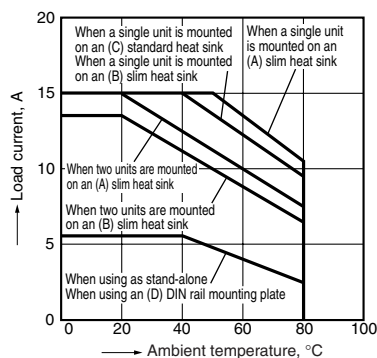


(3)-1. 25 A type (when using iron plate)

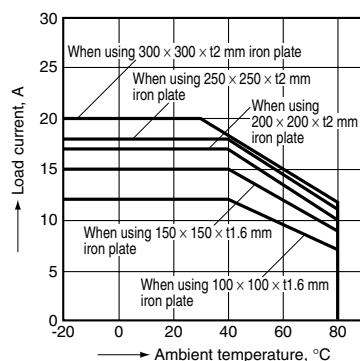

(3)-2. 25 A type (when using a heat sink)

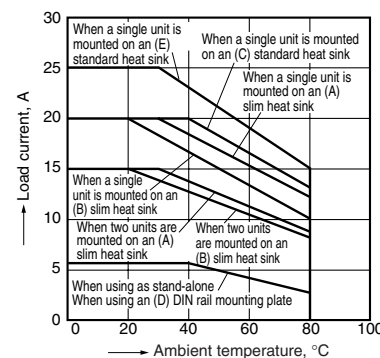


2. Non-repetitive surge current vs. carrying time

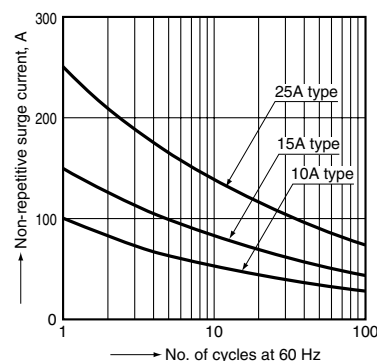

3. Input current vs. input voltage characteristics

(10A, 15A and 25A common)

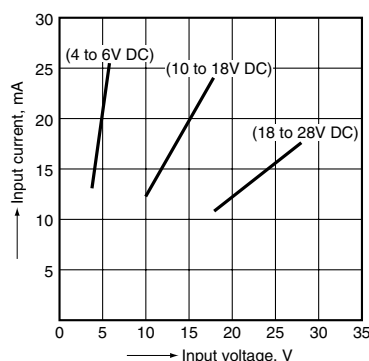



AQ-J

(2) AQ-J SSR Slim Heat Sink Combined Type

1. Load current vs. ambient temperature Use load current within range specified in the figure below


(1) Output arrangement: 1a

(2) Output arrangement: 1a × 2

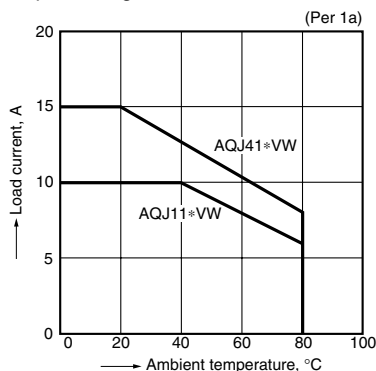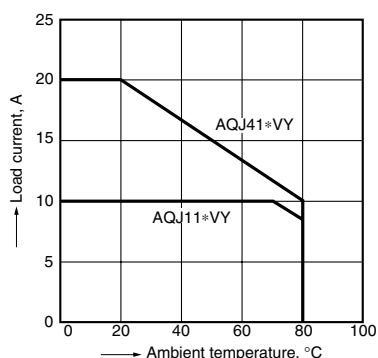


Note:
When two contacts are operated simultaneously.
In the case of a single-contact operation, the rating of
(1) AQJ11*VY, AQJ41*VY applies.

2. Surge current vs. carrying time

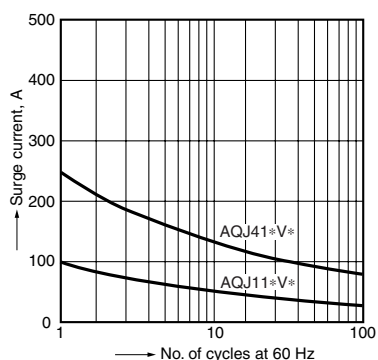

3. Input current vs. input voltage characteristics

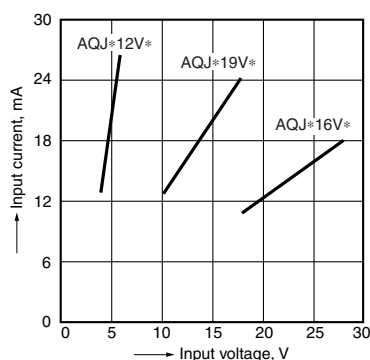

DIMENSIONS (mm inch)


The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://panasonic-electric-works.net/ac>

1. AQ-J Stand Alone

CAD Data




External dimensions

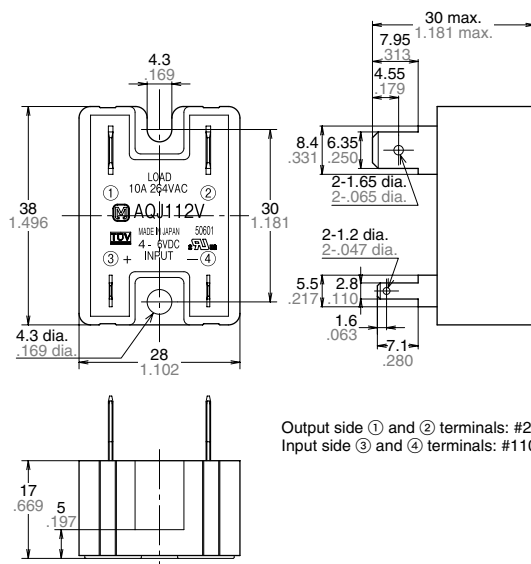


Output side ① and ② terminals: #250 type, t = 0.8 .031
Input side ③ and ④ terminals: #110 type, t = 0.5 .020

Schematic




Mounting dimensions



2.-(1) Slim Heat Sink Combined Type


Output Arrangement: 1a

CAD Data




Note: When using on a DIN rail, please install so that the "A" part is on top.


External dimensions

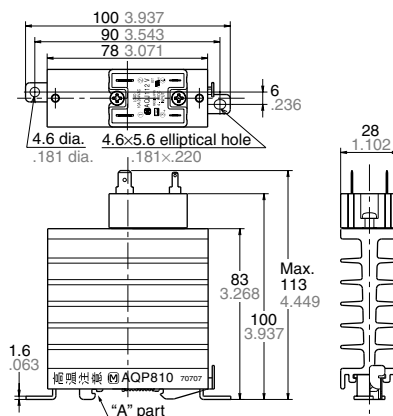

Schematic




Mounting dimensions (Top view)



2.-(2) Slim Heat Sink Combined Type


Output Arrangement: 1a × 2

CAD Data




Note: When using on a DIN rail, please install so that the "A" part is on top.

External dimensions

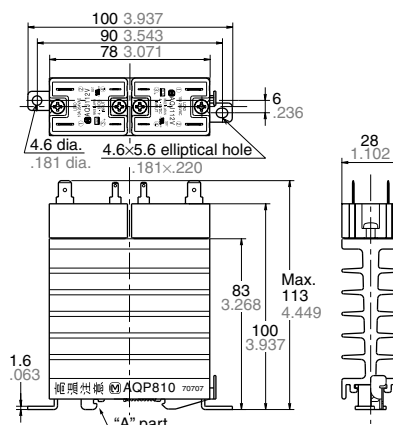


Schematic



Note: Use caution for AQ-J terminal numbers.

Mounting dimensions (Top view)



ACCESSORIES


AQP-HS-SJ10A Slim Heat Sink

CAD Data




Note: When using on a DIN rail, please install so that the "A" part is on top.

External dimensions

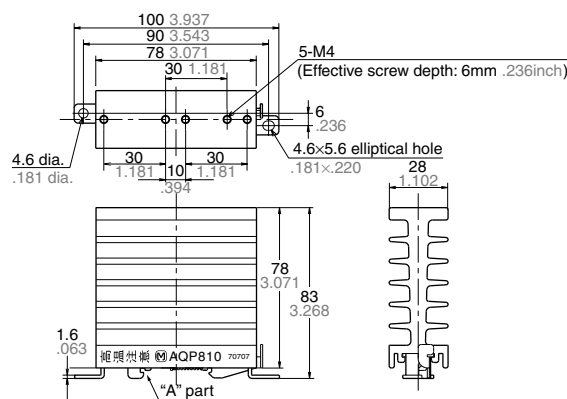

Mounting dimensions (Top view)




AQP-HS-SJ20A Slim Heat Sink

CAD Data




Note: When using on a DIN rail, please install so that the "A" part is on top.

External dimensions

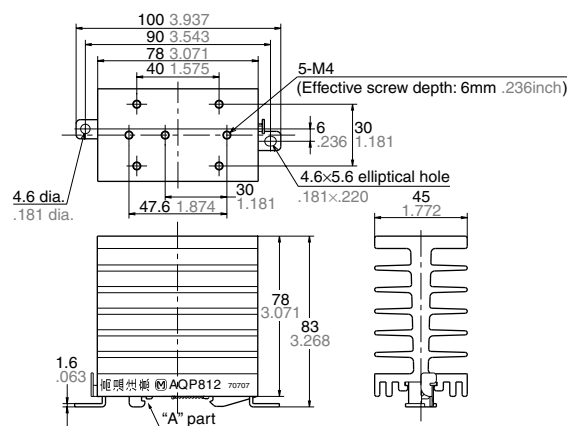

Mounting dimensions (Top view)




AQ-J

AQP-HS-J10A Standard Heat Sink (for 10A and 15A types)


CAD Data



External dimensions

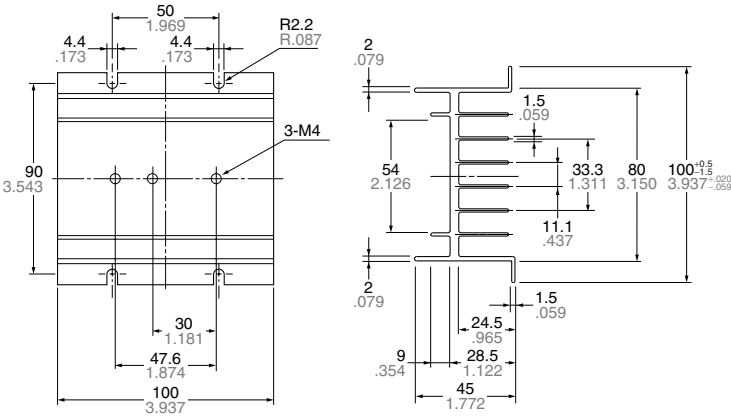

Mounting dimensions




AQP-HS-J25A Standard Heat Sink (for 25A type)


CAD Data



External dimensions

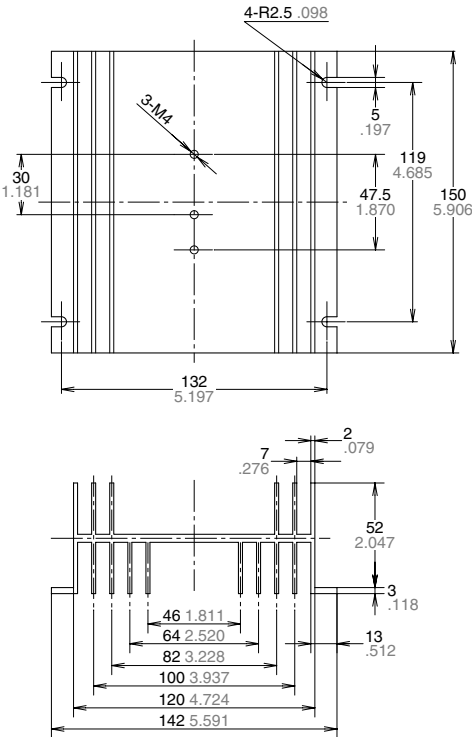

Mounting dimensions

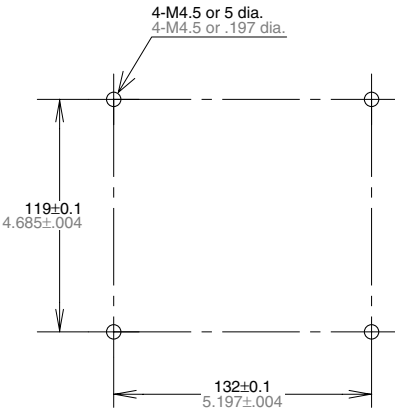


AQP-DPJ DIN Rail Mounting Plate

CAD Data



External dimensions

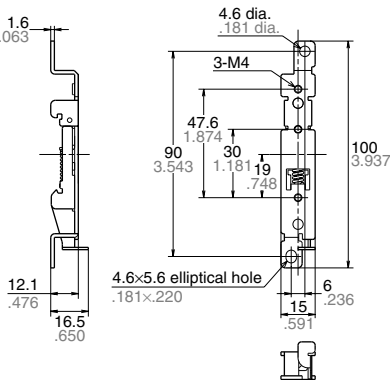


Mounting rail

CAD Data



AT8-DLA1

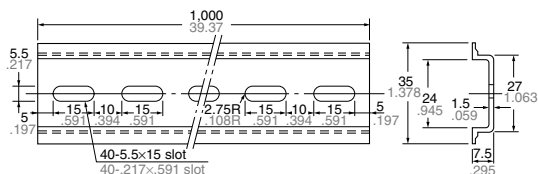


Fastening plate

CAD Data



ATA4806

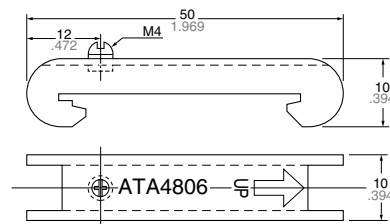

NOTES

1. Part number indication

The AQ-J slim heat sink combined type is a product combining the AQ-J SSR and AQ-J SSR heat sinks. The part numbers are indicated on each AQ-J SSR and heat sink.

Ex) In the case of AQJ112VY

Part number of AQ-J SSR: AQJ112V

Part number of the heat sink: AQP810*

When using these parts, please refer to REFERENCE DATA, "1. Load current vs. ambient temperature".

Note: * The Japanese part number is printed on the following accessories in stead of Global part number. Please refer to the below chart for interpretation from Japanese to Global part number.

Products	Japanese Part No.	Global Part No.
Slim heat sink (28 mm)	AQP810	AQP-HS-SJ10A
Slim heat sink (45 mm)	AQP812	AQP-HS-SJ20A
Standard heat sink (10A and 15A)	AQP811	AQP-HS-J10A
Standard heat sink (25A and 40A)	AQP808	AQP-HS-J25A
Standard heat sink (AQ-N 25A)	AQP804	AQP-HS-30/40A
DIN Rail Mounting Plate (for AQ-J)	AQP809	AQP-DPJ
DIN Rail Mounting Plate (for AQ-N)	AQP803	AQP-DP
Mounting Rail	ATA48011	AT8-DLA1
Terminal Cover (for AQ-N)	AQP807	AQP-NPC

Recommended Temperature Controllers

<KT4H Temperature Controller>

Our temperature controller is recommended for use with our Solid State Relays.

Features

- Data can be collected using the RS485 communications interface via a PLC.
- Improved visibility using a negative type LCD and backlight.
- Depth-wise length (chassis dimension) is 56 mm 2.205 inch.

Substitute part numbers

Power supply	Control output	Part No.
100 to 240 V AC	Relay contact	AKT4H111100

*For detailed product information about temperature controllers, please refer to our website:
http://panasonic-denko.co.jp/ac/e/fasys/component/temperature_controller/



For Cautions for Use.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com