
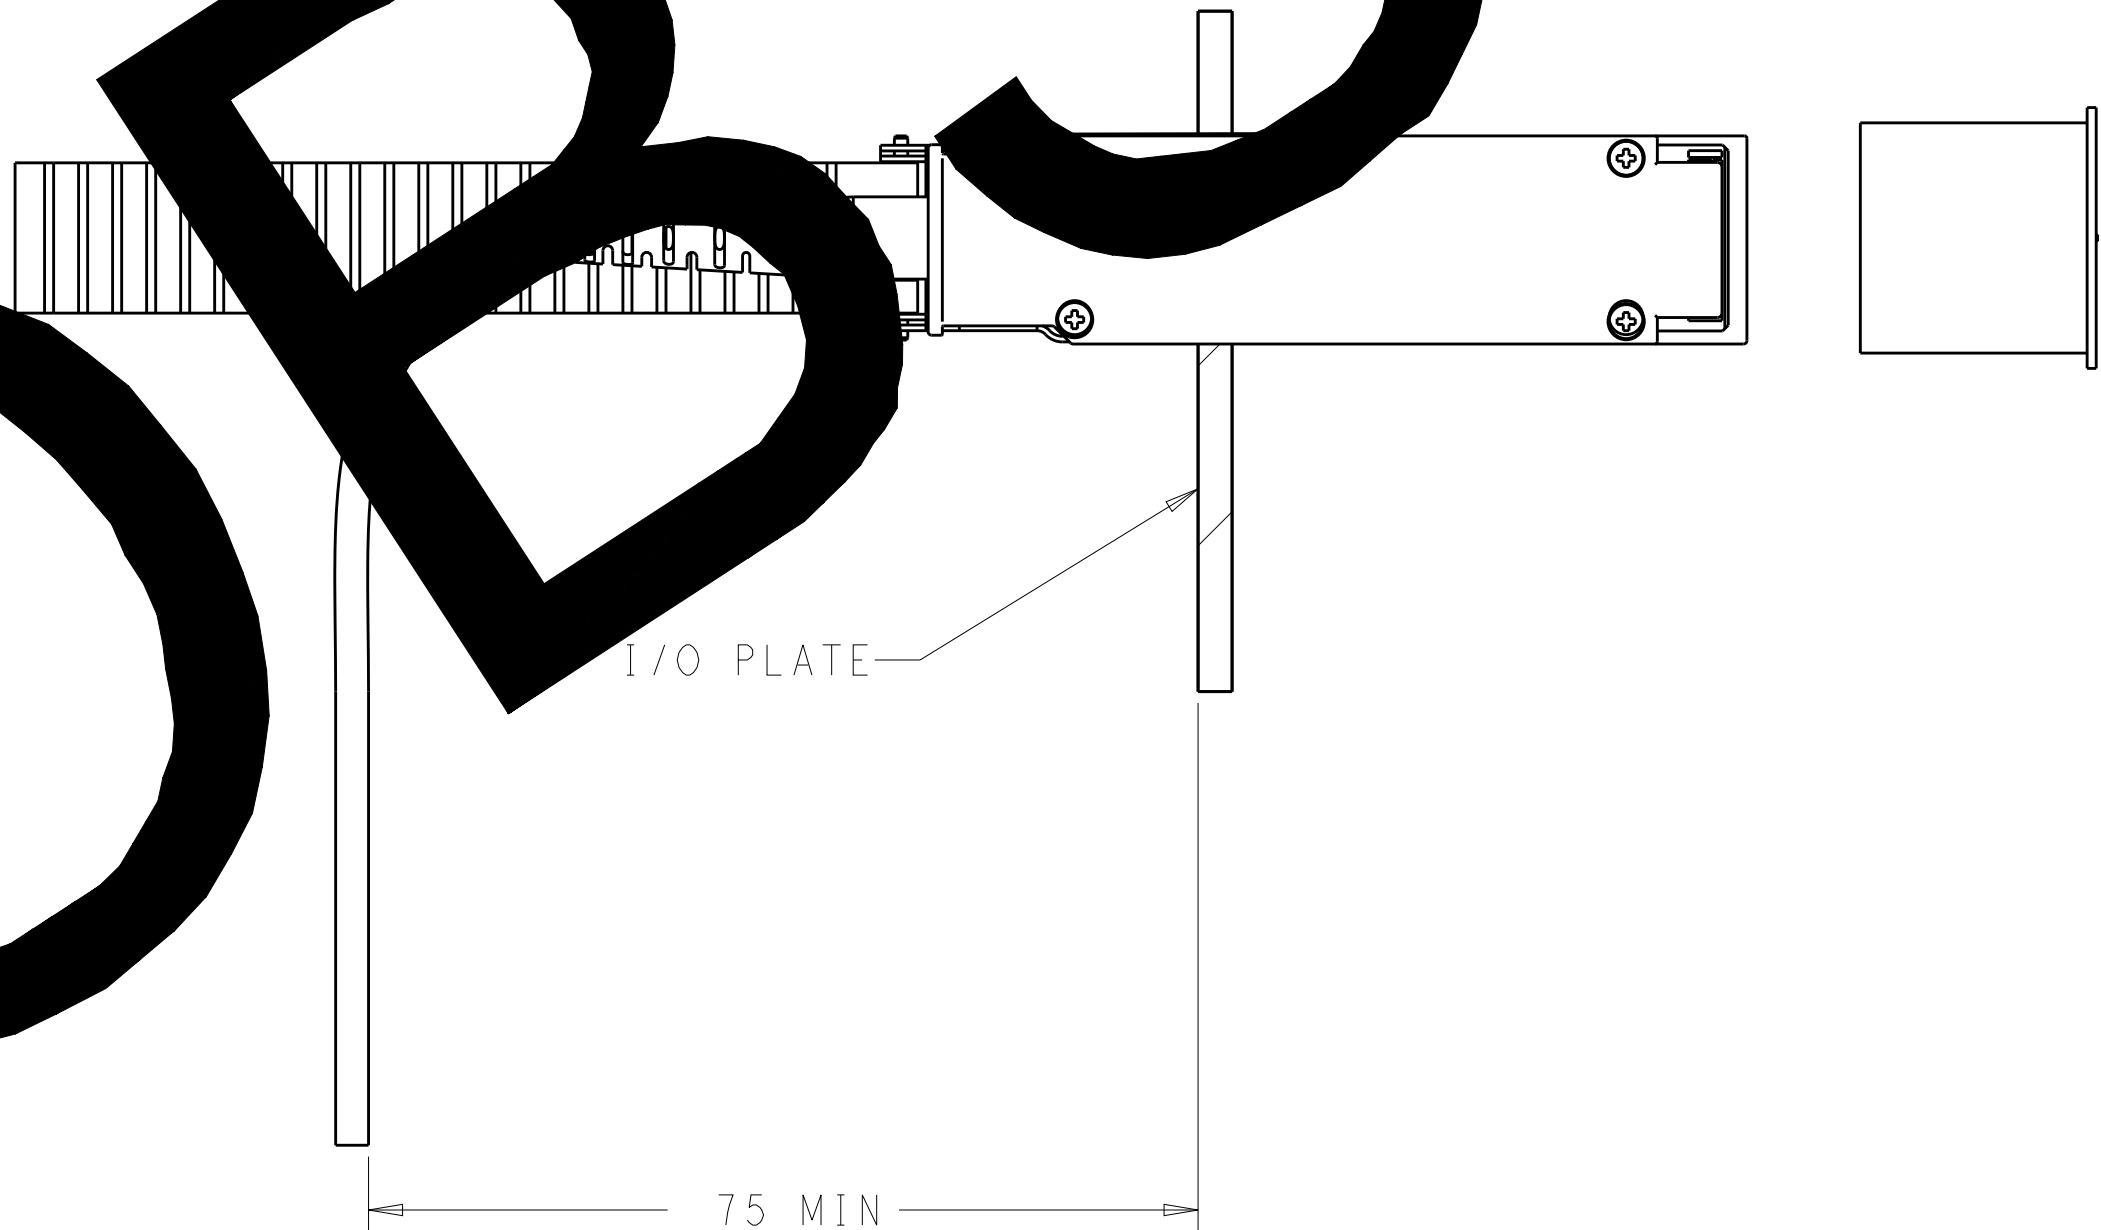
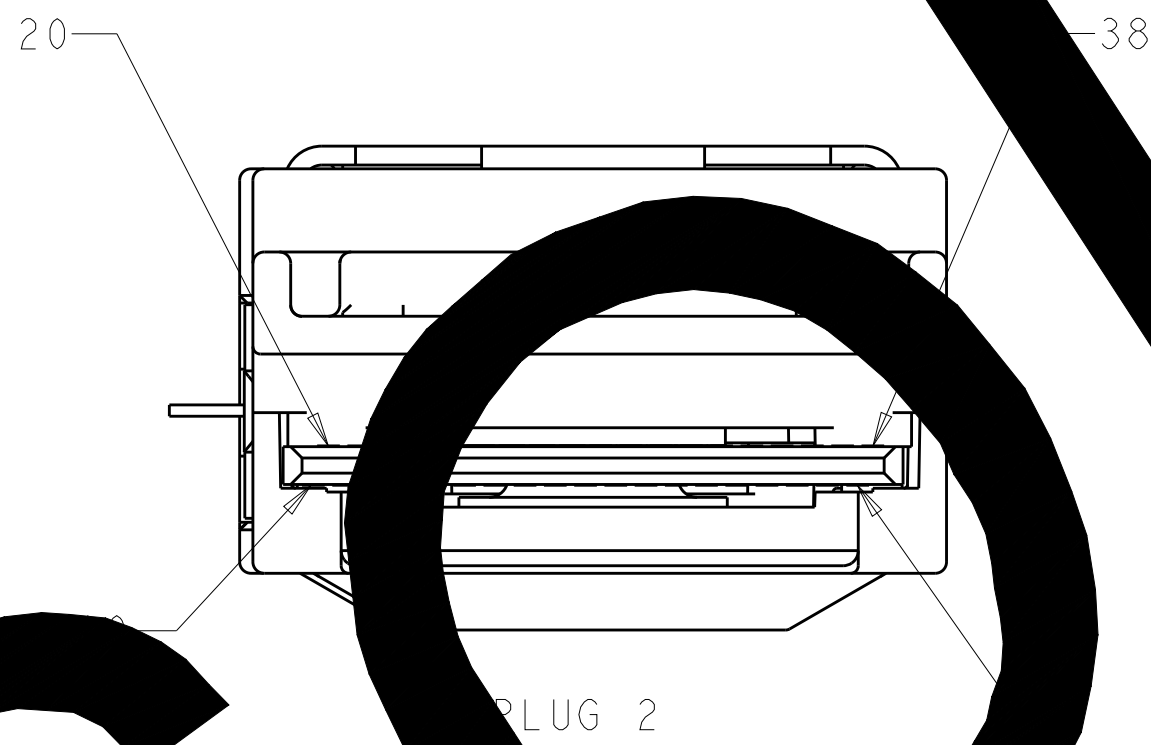
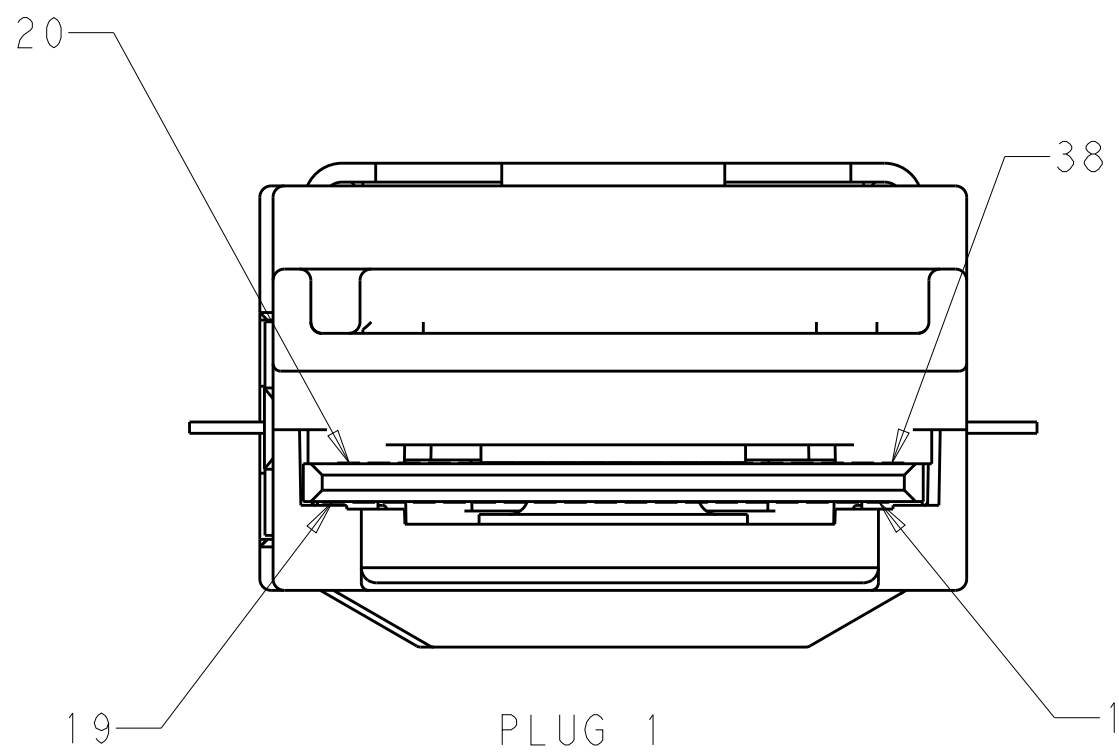
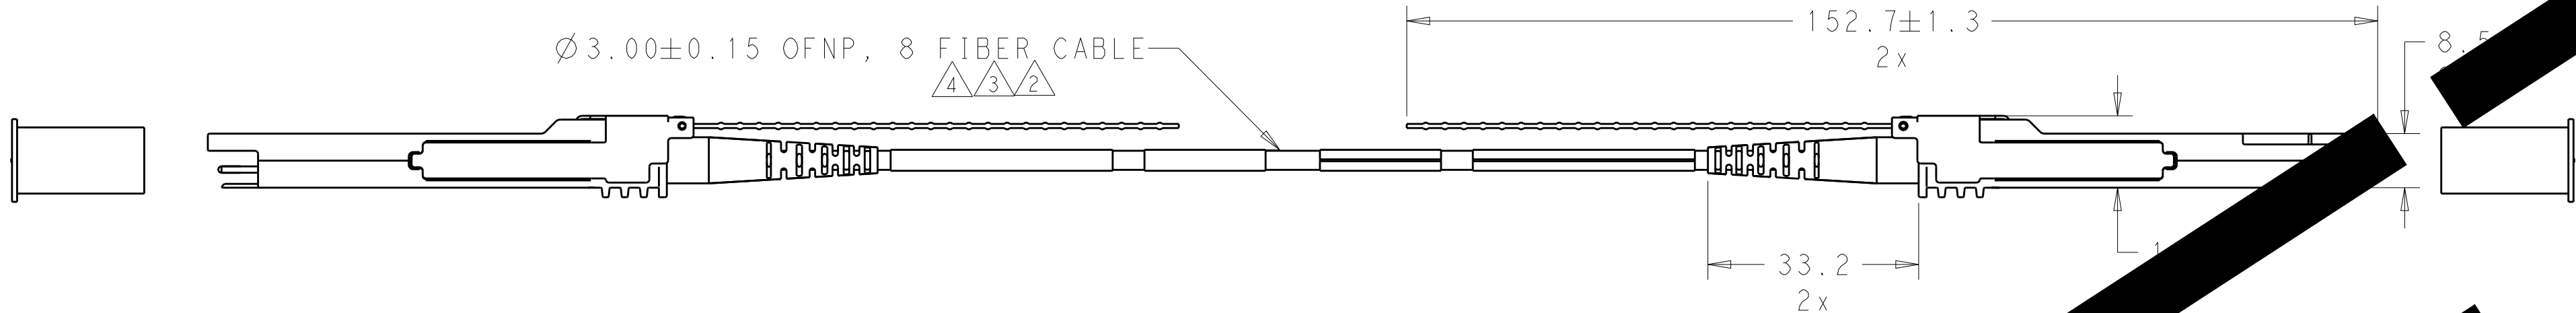


REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
	H	ECR-14-012918	04SEP2014	SW
	H1	OBSOLETE PER ECR-16-006201	08JUL2016	DEH

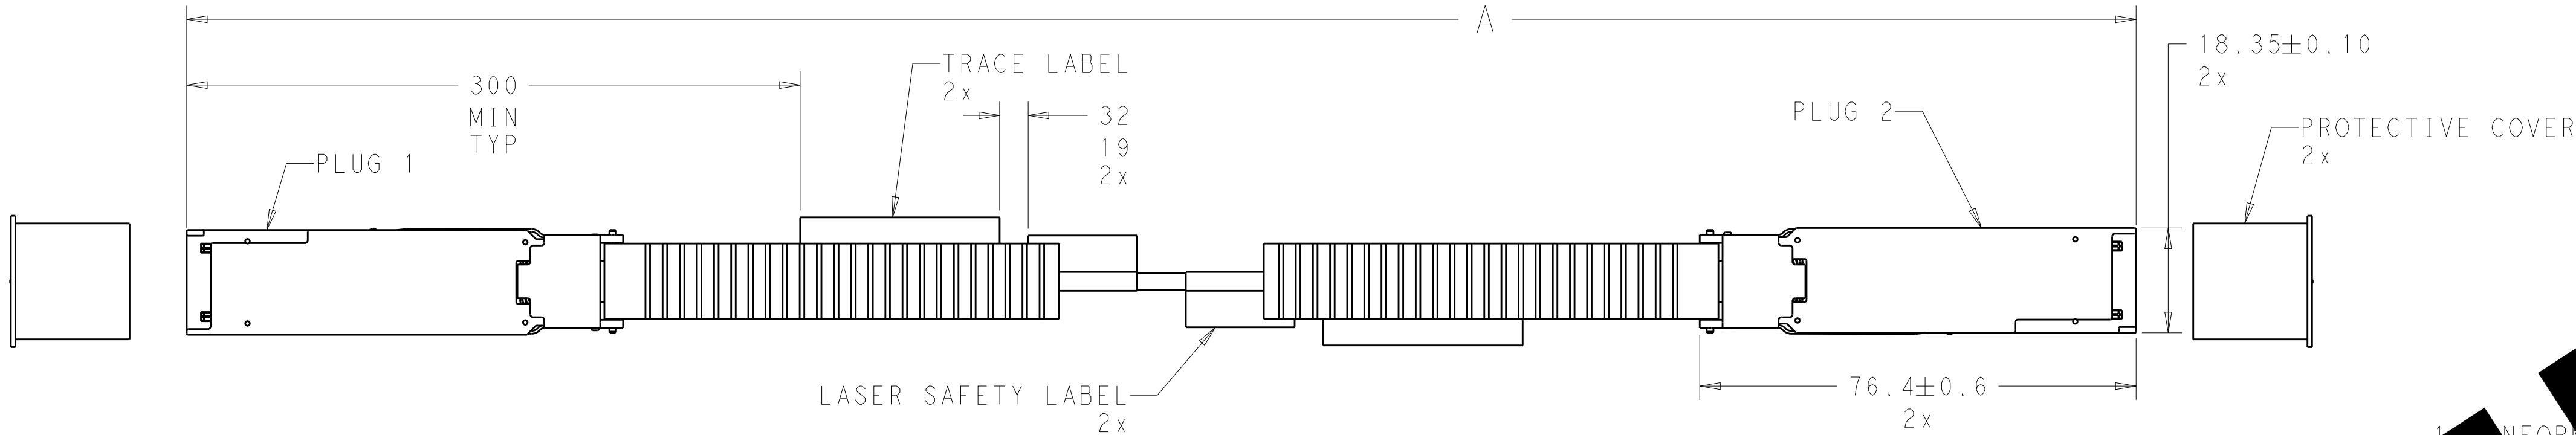

1. CONFORMS TO 8-177340 PRODUCT PERFORMANCE REQUIREMENTS. VERIFIED ACCORDANCE WITH 501-122042.
2. CAUTION! CABLE MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.
3. CONFORMS TO 409-CORE INTERFLECT CABLE REQUIREMENTS. STANDARD OM2 CABLE TO BE USED FOR LENGTHS UP TO 30 METERS, OM3 CABLE FOR LENGTHS UP TO 10 METERS.
4. SEE TRACE LABEL FOR FIBER IDENTIFICATION.
5. MASSIS GROUND IS ISOLATED FROM SIGNAL GROUND (GND) IN THE CABLE AND CONNECTOR.
6. THE SIGNALS ARE NOT CARRIED THROUGH TO THE OTHER END, SINCE EACH END OF THE CABLE IS POWERED SEPARATELY.
7. THE QSFP MODULES IMPLEMENT THE 12C INTERFACE DESCRIBED IN SFF-8636 REV 1.5.
8. THE QSFP MODULES IMPLEMENT THE 12C INTERFACE DESCRIBED IN SFF-8636 REV 1.5.
9. EEPROM PROGRAMMED PER 2123603_EEPROM_CD REV H.
10. CONTAINS FIRMWARE REVISION 6.15.

32±0.32	2-2123603-6
28±0.28	2-2123603-5
21±0.21	2-2123603-4
19±0.19	2-2123603-3
18±0.18	2-2123603-2
17±0.17	2-2123603-1
16±0.15	2-2123603-0
14±0.15	1-2123603-9
13±0.15	1-2123603-8
12±0.15	1-2123603-7
11±0.15	1-2123603-6
9±0.15	1-2123603-5
8±0.15	1-2123603-4
7±0.15	1-2123603-3
1±0.15	1-2123603-2
100±1.00	1-2123603-1
50±0.50	1-2123603-0
40±0.40	2123603-9
30±0.30	2123603-8
25±0.25	2123603-7
20±0.20	2123603-6
15±0.15	2123603-5
10±0.15	2123603-4
5±0.15	2123603-3
3±0.15	2123603-2
2±0.15	2123603-1
A / m	PART NUMBER

OBSOLETE

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. BRIGGS 08-Jul-16	NAME PARALIGHT CABLE ASSEMBLY, 4x14, QSFP, ETHERNET	
DIMENSIONS:		CHK B. FAIR 08-Jul-16		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. TRYSON 08-Jul-16	SIZE A1	
	0 PLC ±.5	PRODUCT SPEC	RESTRICTED TO	
	1 PLC ±0.13	APPLICATION SPEC	-	
	2 PLC ±0.13	WEIGHT	SCALE	
	3 PLC ±0.013	-	5:4	
MATERIAL	4 PLC ±0.0001	Customer Drawing	SHEET	
	ANGLES ±.0001	-	1 OF 2	
FINISH	FINISH	-	REV	
	-	-	H1	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

QSFP	
PIN NO.	SIGNAL
1	GND 
2	Tx2n
3	Tx2p
4	GND 
5	Tx4n
6	Tx4p
7	GND 
8	ModSelL
9	ResetL
10	Vcc Rx 
11	SCL
12	SDA
13	GND 
14	Rx3p
15	Rx3n
16	GND
17	Rx1
18	Rx1
19	GND 
	GND 
	Rx2n
22	Rx2p
23	GND 
24	
25	Rx1
	GND 
	ModPr
	Int
28	Vcc Tx 
30	
31	ELPMode
32	GND 
33	Tx3p
34	Tx3n
35	GND 
36	Tx1p
37	Tx1n
38	GND 

FIBER COLOR CODE CHART	
FIBER #	COLOR
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	FILLER
6	FILLER
7	FILLER
8	FILLER
9	GRAY
10	WHITE
11	RED
12	BLACK

TE P/N ——— X-2123603-X ———
X-2123603-X = PREFIX (LASER SAFETY ID)
X-2123603-X = 1 PART NUMBER

BAR CODE


SERIAL NUMBER: BBBMMYYDDDDNNNNN
BBB = BUILDING NUMBER
MM = MANUFACTURING LOCATION
YY = TWO DIGIT YEAR
DDD = ORDINAL DATE
NNNNN = FIVE DIGIT SERIAL NUMBER

COUNTRY OF ORIGIN
WHEN MANUFACTURED
OUTSIDE THE US LABEL
MUST READ "MADE IN XXXXX",
WHERE XXXXX REPRESENTS
THE COUNTRY OF MANUFACTURING.

TE LOGO & CUSTOMER PRINT REV

REV.H

 TRACE LABEL INFORMATION
NOTE: LASER SAFETY CERTIFICATION IS
BASED ON THE PREFIX AND THAT TE IS THE
ONLY MANUFACTURER VISABLE ON THE LABEL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.BRIGGS 08-Jul-16	 TE Connectivity	
		CHK B.FAIR 08-Jul-16		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.5 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±.1 FINISH -	APVD M.TRYSON 08-Jul-16	NAME PARALIGHT CABLE ASSEMBLY, 4x14, QSFP, ETHERNET
			PRODUCT SPEC - APPLICATION SPEC -	SIZE A1
MATERIAL -	-	WEIGHT -	CAGE CODE -	DRAWING NO. 2123603
Customer Drawing			SCALE 5:4	SHEET 2 OF 2
			REV H1	

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :
401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :
Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :
Email service@ameya360.com

➤ Partnership :
Tel +86 (21) 64016692-8333
Email mkt@ameya360.com