

CT48A CT48A Part number 89420047



- Input by J-K thermo-couple or by thermo-resistance Pt 100 (2-wire)
- 2 regulation modes : ON/OFF or proportional derivative selected by wiring
- Relay output

Part numbers

	Type	Description	Temperatures	Scale divisions
89 420 047	CT48A	Thermocouple J	0 + 250	10 °C

Specifications


Supply voltage Un	230 to 240 VAC 50/60 Hz
Operating range	0,85 to 1,15 x Un
Maximum power consumption	2 VA
Thermocouple according to IEC 584	J - K
Automatic cold-junction compensation	For J - K : semi-conductor
Max. line resistance	150 Ω
Resist. temp. detector Pt 100 according to IEC 751	2-wire
Derating following line resistance	1 °C / 0,4 Ω
Derating with regard to the setpoint	J - K : ≤ 1 °C
Per 10 °C variation in ambient temperature	Pt 100 : ≤ 0,1 °C
Derating with regard to the setpoint	J - K : ≤ 1 °C
Per 10 Ω of line resistance variation	
Derating with regard to the setpoint	≤ 0,1 %
Per 10 % variation in supply voltage	
ON/OFF output action	
Fixed hysteresis	0,4 %
Derived proportional output action	
Fixed proportional band (% of full scale)	3 %
Derived proportiona output action	
Period proportional band	22 s
Changeover relay	5 A / 250 V AC max.
Mechanical life (operations)	3x10 ⁵
Behaviour in the event of sensor failure	Relay in rest position
Scale evolution	80 mm
Display accuracy J-K (full scale)	± 2 %
Display accuracy Pt 100 (of the full scale)	± 1,5 %
Operating temperature range (°C)	0 °→+55
Storage temperature range (°C)	-20 →+70
Insulation according to standard VDE 0110	Group C for 250
Protection class according to DIN 40050 Casing	IP20
Protection class according to DIN 40050 Front panel	IP41
Mounting	Clip
Connection	Solder terminals socket, 8 poles
Weight (g)	350

Accessories

Accessories	Code
Solder tag connector 8-pin	25 622 301
*** TRADUCTION MANQUANTE ***	25 622 303
Protective cover IP 54	79 237 709


Dimensions (mm)

Dimensions - mounting

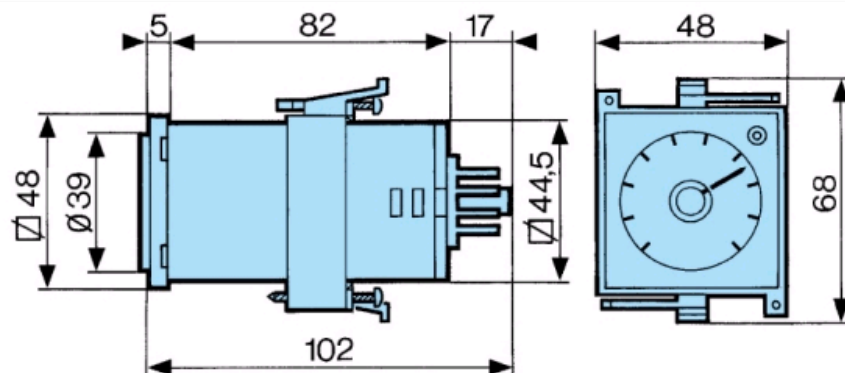


Dimensions (mm)

Panel cut-out

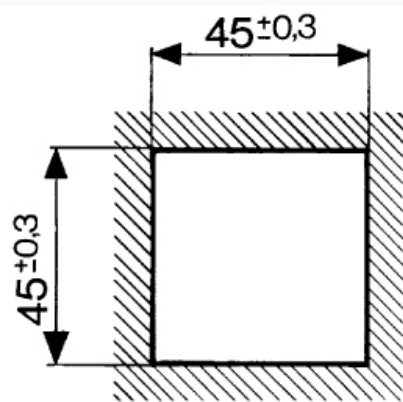

Dimensions (mm)


Screw terminal or connector socket - 8-pin base : ref. 25 622 303
for panel mounting

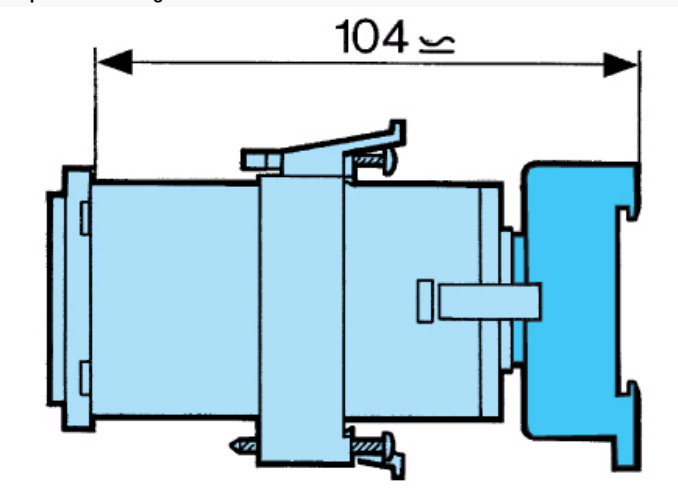

Screw terminal or connector socket - 8-pin base : ref. 25 622 303 - for panel mounting

Dimensions (mm)


Screw terminal or connector socket - 8-pin base : ref. 25 622 303
for mounting on DIN rail 35 mm EN 50022

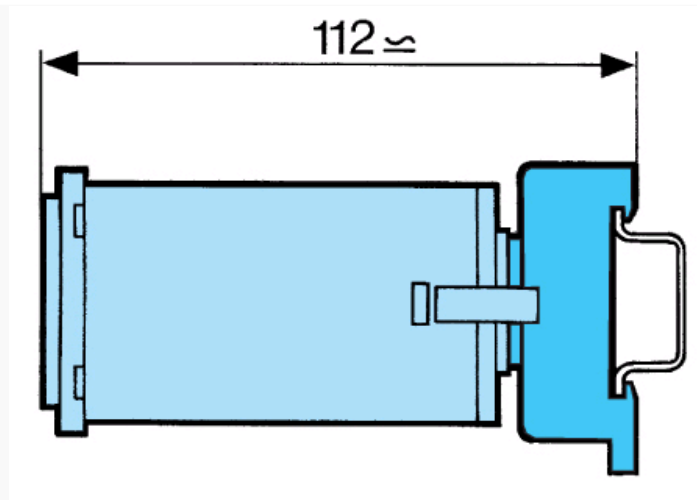

Screw terminal or connector socket - 8-pin base : ref. 25 622 303 - for mounting on DIN rail 35 mm EN 50022

Dimensions (mm)

Connector socket

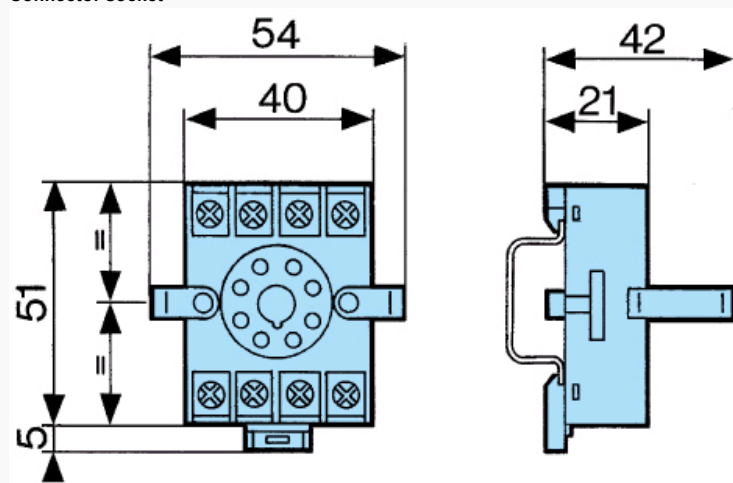


Screw terminal or connector socket - 8-pin base : ref. 25 622 303 - for mounting on DIN rail 35 mm EN 50022

Dimensions (mm)

Protective cover - IP 54


79 237 709

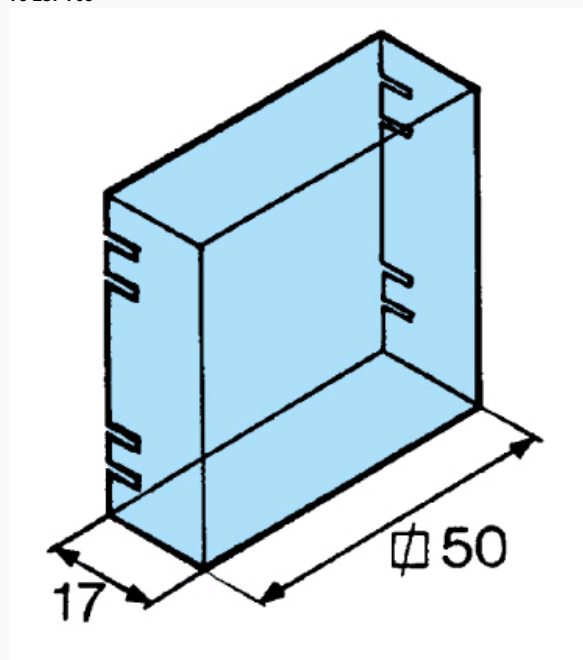

Protective cover IP 54 Ref. 79 237 709


Dimensions (mm)

Solder tag connector
8-pin : ref. 25 622 301

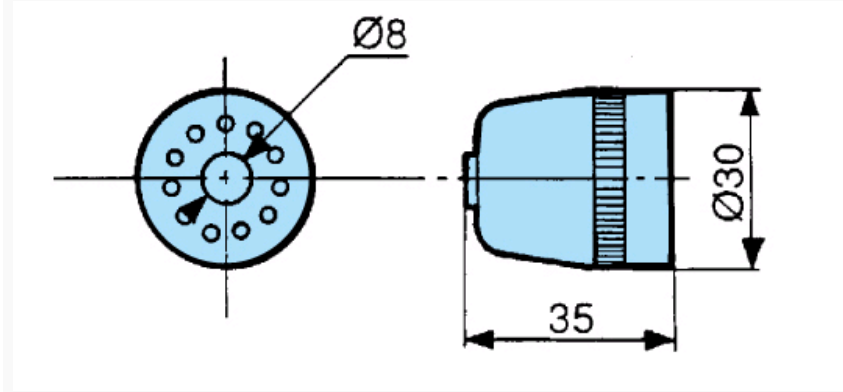

Solder tag connector 8-pin : Ref. 25 622 301


Dimensions (mm)

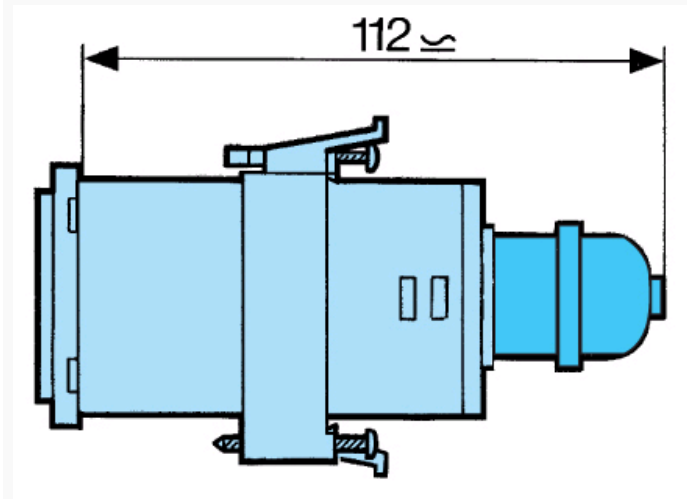

Solder tag connector 8-pin : Ref. 25 622 301

Curves

ON/OFF output action - CT48A

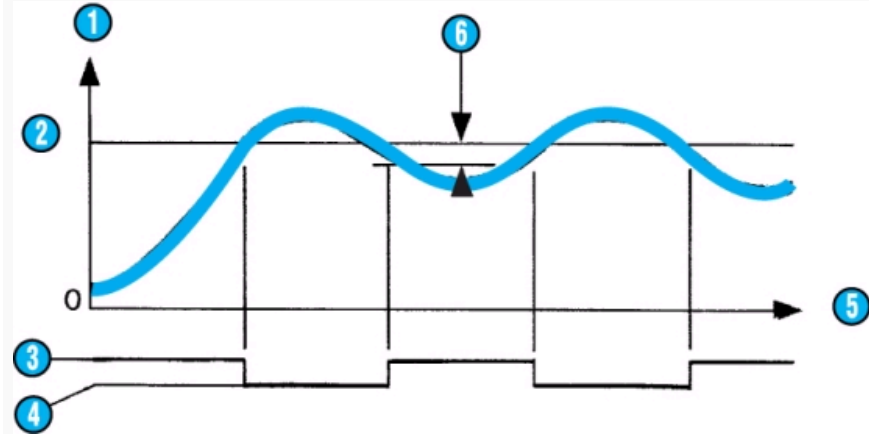


N°	Legend
1	Temperature
2	Setpoint

③	Output ON
④	Output OFF
⑤	Time
⑥	Hysteresis (0,4 %)


Curves

Proportional derivative (PD) action - CT48A

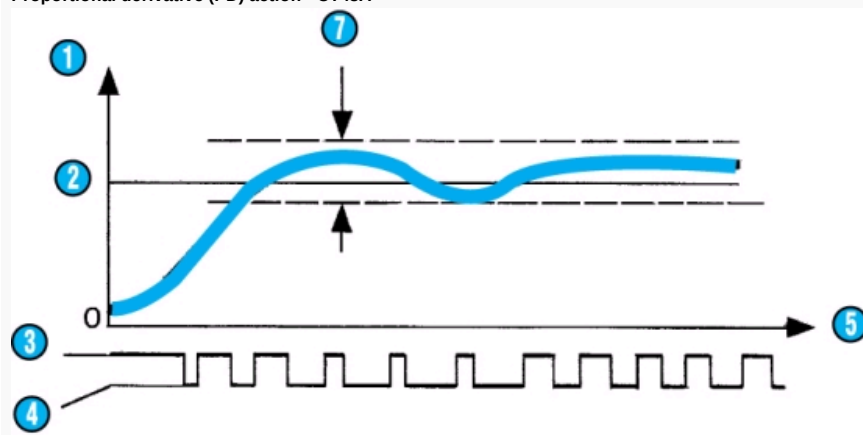

N°	Legend
①	Temperature
②	Setpoint
③	Output ON
④	Output OFF
⑤	Time
⑦	Proportional band (PB)

Connections

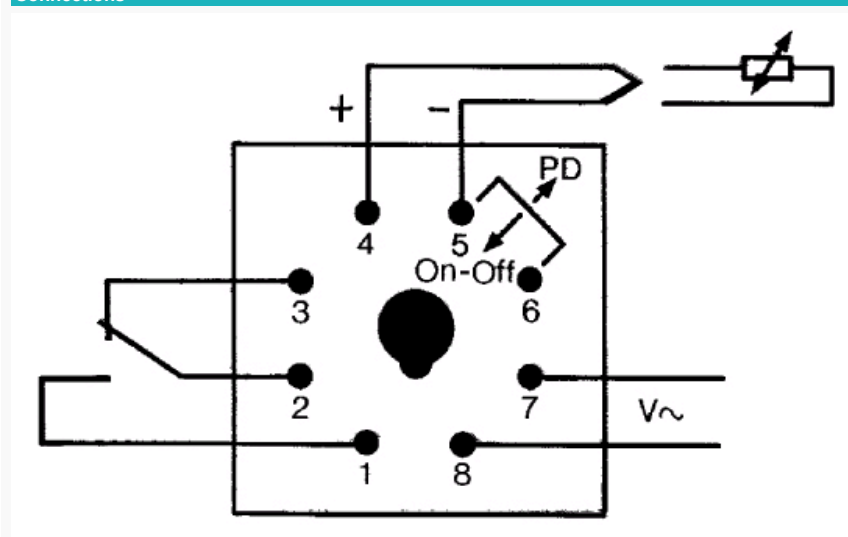

Other information

Other possible output type : solid state 0 Other possible supply voltages : 24 V AC and 110 V AC.
Please consult us.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com