

4

3




2

1

used for:

D-SUB

POS.	A -0.76	B -0.25	C	Art.-NO.
9	31.19	16.46	25.00 $^{+0.12}_{-0.13}$	302A10019X
15	39.52	24.79	33.30 $^{+0.15}_{-0.1}$	302A10029X
25	53.42	38.50	47.04 ± 0.13	302A10059X
37	69.70	54.96	63.50 ± 0.13	302A10069X

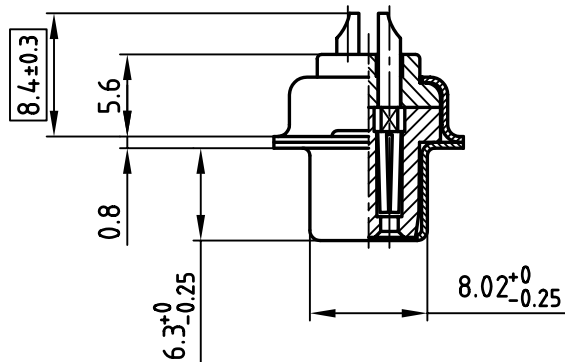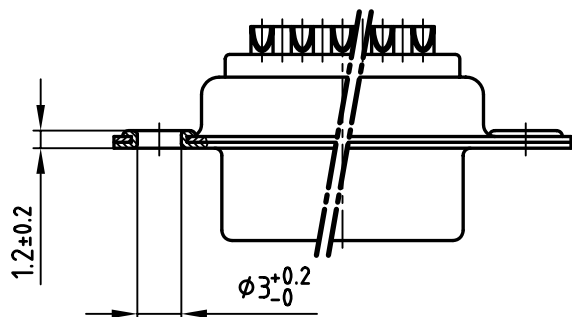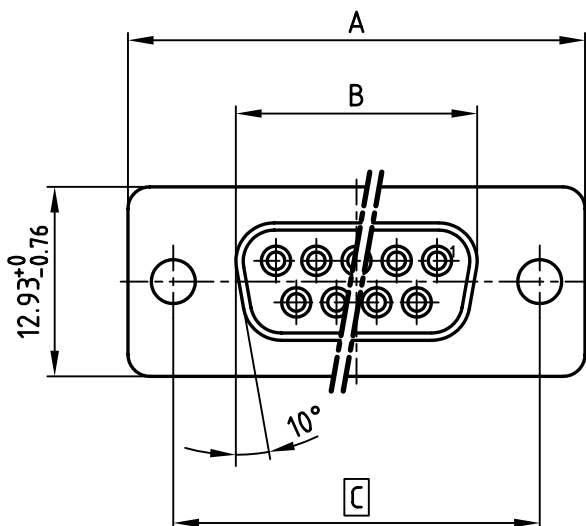

NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
5. ACCEPTS CABLE AWG 20
6. = CRITICAL DIMENSION: SPC

Directive 2002/95/EC
„RoHS“
Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.

DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				2001	date	name	
				drawn	28.05.	Parei	
				appd.	28.05.	E. Mickenbecker	
				norm	DIN 41652		
				d-old			
							
rev.	description	date	name				

A

A

4

3

2

1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com