








Rating	20A 14VDC	Mounting Hole 	Circuit Diagram 									
Contact Resistance	50m ohm Max.											
Insulation Resistance	DC 500V 100M ohm Min.											
Dielectric Strength	AC 1500V 1 minute											
Operation Temperature	25°C~85°C											
Switch Function	3P SPST ON-OFF (LED)	<table><tr><td>Thickness</td><td>X</td><td>Y</td></tr><tr><td>0.75~1.5</td><td>23.3+0.1</td><td>11.6+0.1</td></tr><tr><td>1.5~2.5</td><td>23.6+0.1</td><td>11.6+0.1</td></tr></table>	Thickness	X	Y	0.75~1.5	23.3+0.1	11.6+0.1	1.5~2.5	23.6+0.1	11.6+0.1	
Thickness	X	Y										
0.75~1.5	23.3+0.1	11.6+0.1										
1.5~2.5	23.6+0.1	11.6+0.1										

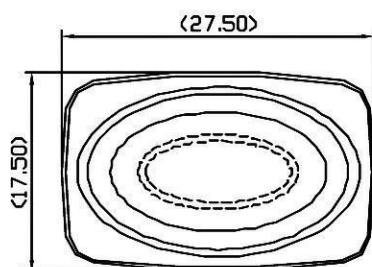

***MATERIAL:**

Frame: Black, Nylon 66 (94-V2)
 Actuator: Red, PC clear (94-V2)
 Waterproof Rubber: Black, Silicone
 Printed: None

***Waterproof: IP65**

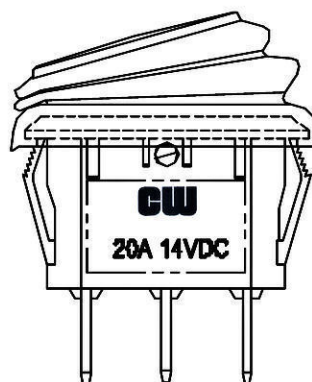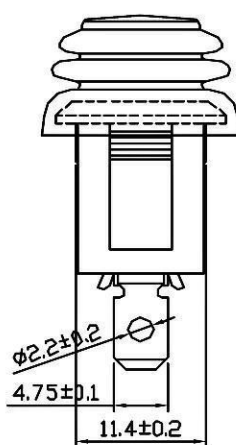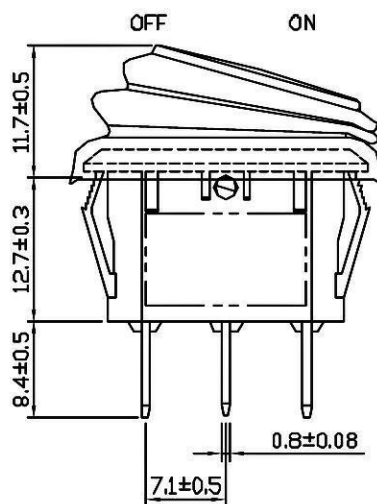

RoHS Compliant

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 2/06/09

Rev. 0

Unit: mm

Checked By: GG

Title: **ROCKER SWITCH**

CW P/N: **GRB278B802BR1**

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com