



Three Phase Rectifier Bridge

$$I_{dAVM} = 45 \text{ A}$$

$$V_{RRM} = 800-1800 \text{ V}$$

V_{RSM} V	V_{RRM} V	Type
900	800	VUO 34-08NO1
1300	1200	VUO 34-12NO1
1500	1400	VUO 34-14NO1
1700	1600	VUO 34-16NO1
1900	1800	VUO 34-18NO1



Symbol	Test Conditions	Maximum Ratings
I_{dAV}	$T_K = 90^\circ\text{C}$, module	36 A
I_{dAV}	$T_A = 45^\circ\text{C}$ ($R_{thKA} = 0.5 \text{ K/W}$), module	37 A
I_{dAVM}	module	45 A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine 300 A $t = 8.3 \text{ ms}$ (60 Hz), sine 320 A
	$T_{VJ} = T_{VJM}$; $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine 260 A $t = 8.3 \text{ ms}$ (60 Hz), sine 280 A
I^2t	$T_{VJ} = 45^\circ\text{C}$; $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine 450 A ² s $t = 8.3 \text{ ms}$ (60 Hz), sine 425 A ² s
	$T_{VJ} = T_{VJM}$; $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine 340 A ² s $t = 8.3 \text{ ms}$ (60 Hz), sine 325 A ² s
T_{VJ}		-40...+130 °C
T_{VJM}		130 °C
T_{stg}		-40...+125 °C
V_{ISOL}	50/60 Hz, RMS $t = 1 \text{ min}$	3000 V~
	$I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3600 V~
M_d	Mounting torque (M5) (10-32UNF)	2 - 2.5 Nm 18-22 lb.in.
Weight	typ.	35 g

Symbol	Test Conditions	Characteristic Values
I_R	$V_R = V_{RRM}$ $T_{VJ} = 25^\circ\text{C}$	$\leq 0.3 \text{ mA}$
	$V_R = V_{RRM}$ $T_{VJ} = T_{VJM}$	$\leq 5 \text{ mA}$
V_F	$I_F = 55 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$	$\leq 1.51 \text{ V}$
V_{T0}	For power-loss calculations only	0.8 V
r_T		15 mΩ
R_{thJH}	per diode, 120° rect. per module, 120° rect.	2.5 K/W 0.42 K/W
d_s	Creeping distance on surface	12.7 mm
d_A	Creepage distance in air	9.4 mm
a	Max. allowable acceleration	50 m/s ²

Data according to IEC 60747 and refer to a single diode unless otherwise stated.
IXYS reserves the right to change limits, test conditions and dimensions.

Features

- Package with DCB ceramic base plate
- Isolation voltage 3600 V~
- Planar passivated chips
- Blocking voltage up to 1800 V
- Low forward voltage drop
- Leads suitable for PC board soldering
- UL registered E72873


Applications

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling

Dimensions in mm (1 mm = 0.0394")

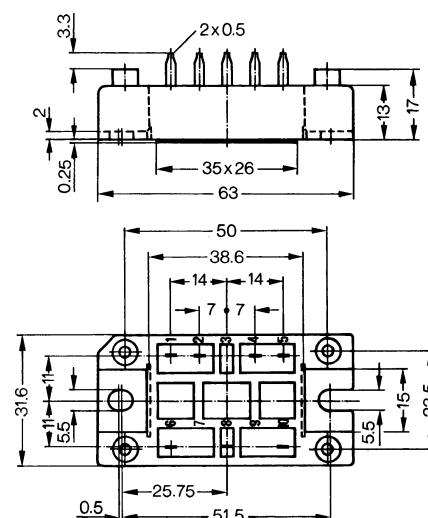

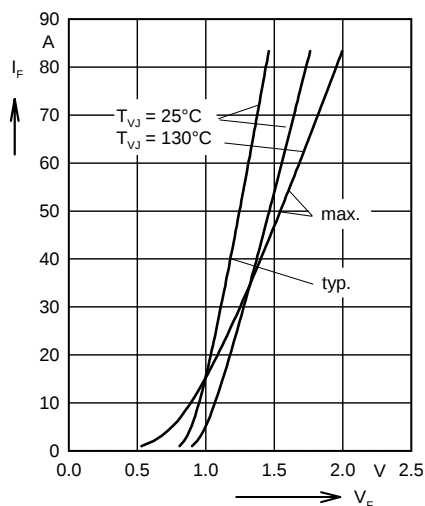


Fig. 1 Forward current versus voltage drop per diode

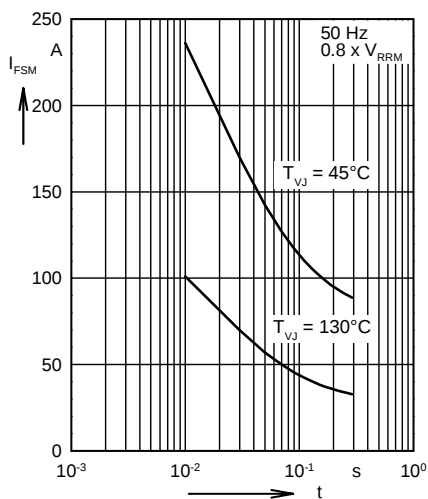


Fig. 2 Surge overload current per diode
 I_{FSM} : Crest value. t : duration

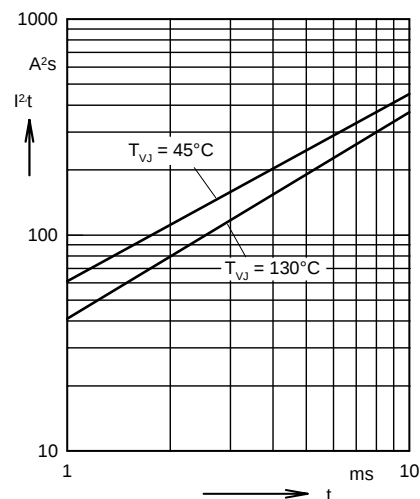


Fig. 3 I^2t versus time (1-10 ms) per diode

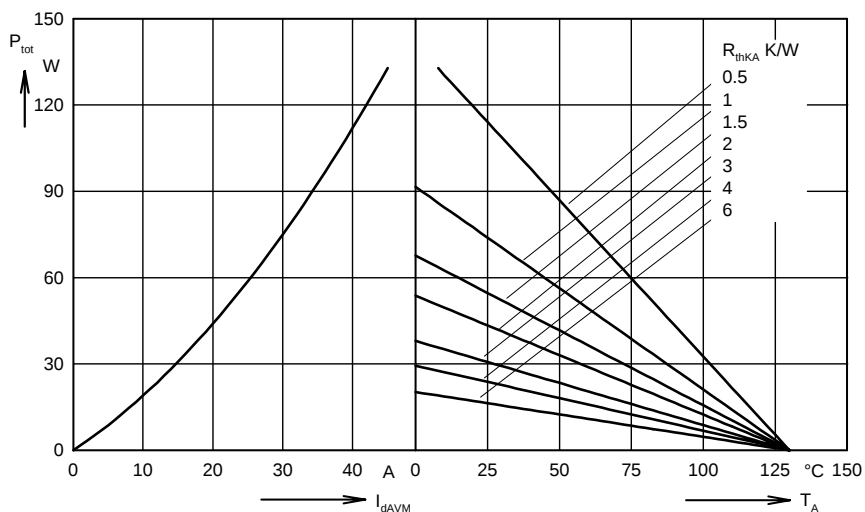


Fig. 4 Power dissipation versus direct output current and ambient temperature

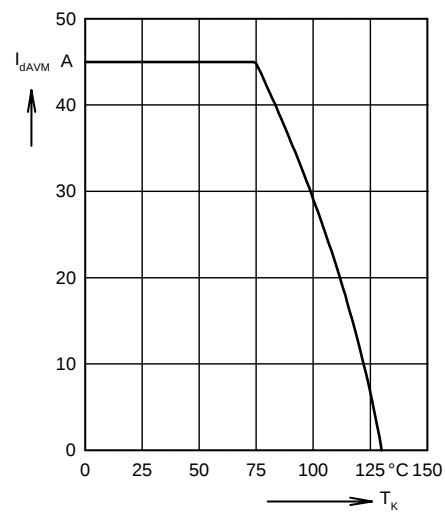


Fig. 5 Maximum forward current at heatsink temperature T_K

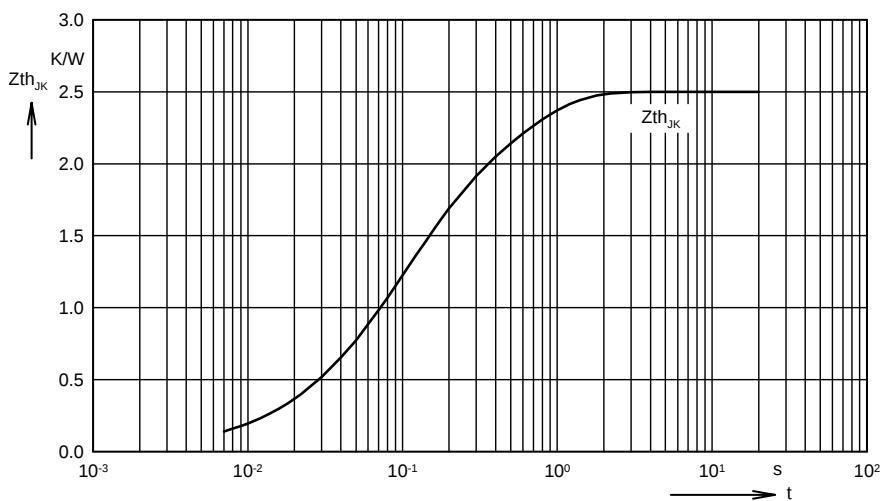


Fig. 6 Transient thermal impedance junction to heatsink per diode

Constants for Z_{thJK} calculation:

i	R_{th} (K/W)	t_i (s)
1	0.005	0.008
2	0.3	0.05
3	1.245	0.1
4	0.95	0.5

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com