



X02 Series

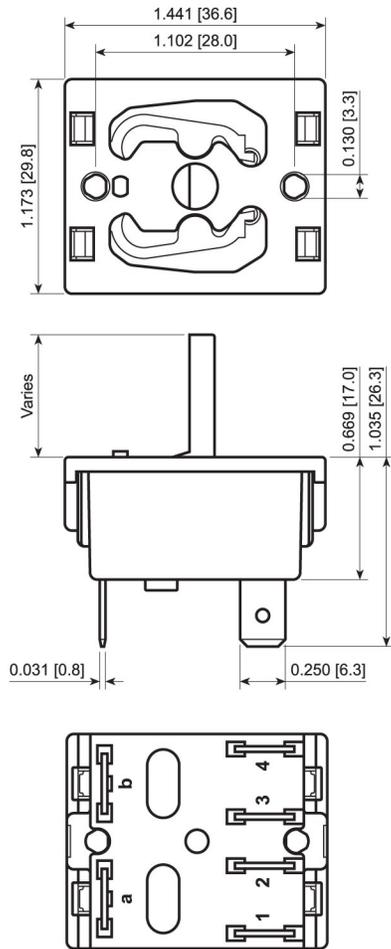

Mounting Options

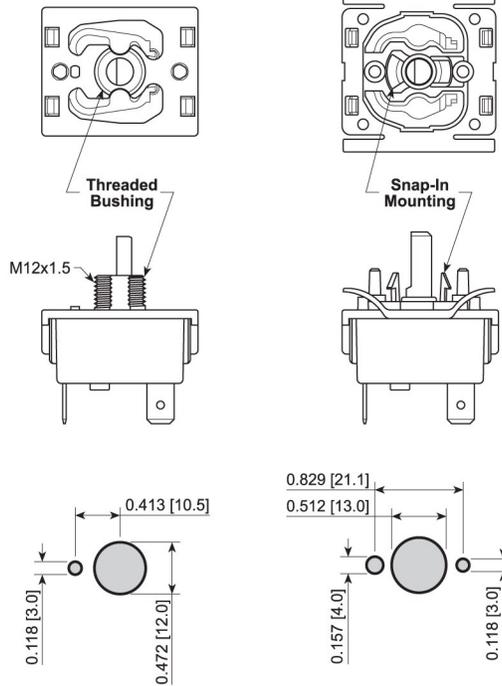

FEATURES:

- Up To 4 Circuits
- Multiple Terminal & Actuator Options
- Housing Made of Rugged Glass Reinforced Nylon

SPECIFICATIONS:


RATING: 10A 125VAC [cULus]
 1/4HP 125VAC [cULus]
 10(3)A 250V [ENEC]
 6(1.8)A 400V [ENEC]

ELECTRICAL LIFE: 300,000 Cycles
TEMPERATURE RATING: -20°C to 125°C
CONTACT RESISTANCE: 35mΩ Max. at 50VAC
INSULATION RESISTANCE: 100MΩ Min. at 500VAC
DIELECTRIC STRENGTH: 1,500VAC for 1 Minute

MATERIALS:

Body: Polyamide 6/6, UL94 V-2
ACTUATOR: Polyamide 6/6, UL94 V-2
CONTACTS: Silver
MOBILE CONTACTS: Silver
TERMINALS: Silver Plated Brass
SPRINGS: Piano Wire
 Copper
HARDWARE: Brass

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

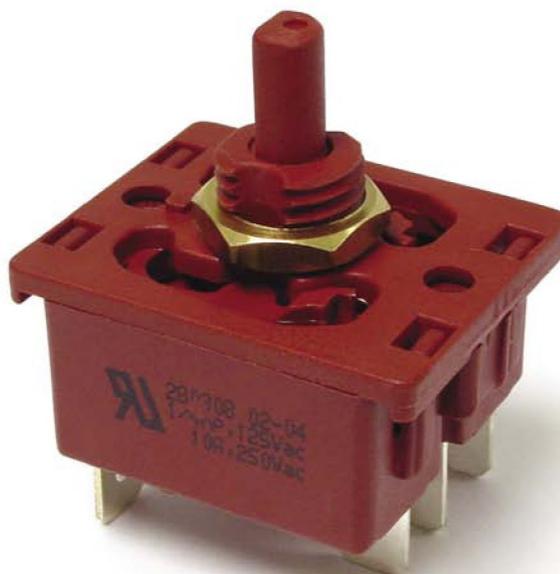

28-03081



24-03A2

EXAMPLE PART NUMBERS:

28-03081 1P3T
 45° Index, 1: AB1, 2: AB2, 3: AB3



E-SWITCH®

www.e-switch.com

800.867.2717

ROTARY

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com