


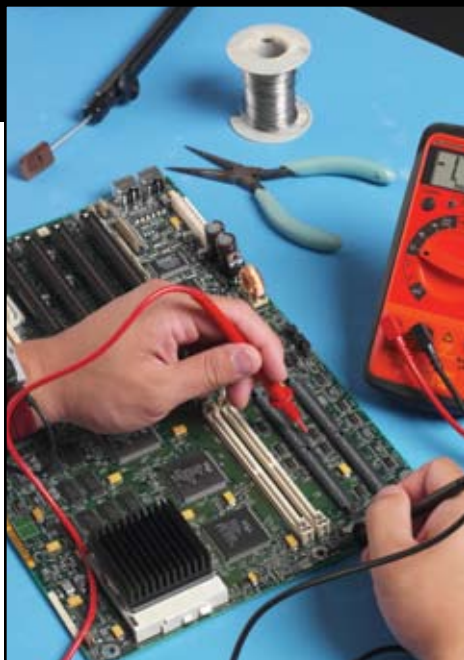

15XP-B

Digital Multimeter

A compact digital multimeter for electronics and test applications

- The 15XP-B is the right choice for electronics engineers, technicians and field service
- Autoranging display for faster measurements
- TTL logic test for digital circuits
- Integrated tilt stand for easy bench use
- Diode test for component level troubleshooting
- Data Hold freezes display to "hold" measurement reading
- 750 V AC / 1000 V DC—highest voltage rating in this size of meter
- Special 2000M Ω measurement range



15XP-B

No hassle warranty

No waiting.

No shipping charges.



Our commitment to high-quality products and customer service is demonstrated by our industry exclusive "No Hassle" warranty. In the unlikely event that an Amprobe Test Tool requires warranty service, any of our local dealers are authorized to replace it, on the spot.

(note: \$500 MSLP limit)





15XP-B Digital Multimeter

Data Sheet

General Specifications

Display	3-1/2 digit liquid crystal display (LCD) with a maximum reading of 1999
Polarity	Automatic, positive implied, negative polarity indication
Overrange	(OL) or (-OL) is displayed
Zero	Automatic
Low Battery Indication	The "⎓" is displayed when the battery voltage drops below the operating level
Auto Power Off	Approx. 10 minutes
Measurement Rate	2 times per second, nominal
Operating Environment	0 °C to 50 °C at <70 % R.H.
Storage Temperature	-20 °C to 60 °C, 0 to 80 % R.H. with battery removed from meter
Accuracy	Stated accuracy at 23 °C $\pm$ 5 °C, <75 % relative humidity
Temperature Coefficient	0.1 x (specified accuracy) per °C (0 °C to 18 °C, 28 °C to 50 °C)
Altitude	2000 m
Power	Single standard 9 volt battery, NEDA 1604, JIS 006P, IEC 6F22
Battery Life	200 hours typical with carbon-zinc
Dimensions	(H x W x D) 155 mm x 72 mm x 32 mm (6.1 x 2.83 x 1.26 IN)
Weight	Approx. 210 g (0.46 Lb) including battery
Warranty	One-year

Specifications

Function	Range	Accuracy
Voltage		
DC Volts		
Ranges	200 mV, 2 V, 20 V, 200 V, 1000 V	$\pm$ (0.5 % rdg + 1 dgt)
AC Volts (45 Hz to 500 Hz)		
Ranges	200 mV (45 Hz to 100 Hz) 2 V, 20 V, 200 V, 750 V	$\pm$ (1.5 % rdg + 5 dgts) $\pm$ (1.5 % rdg + 5 dgts)
Resolution	100 μ V	
Input Impedance	400 mV: >100 M Ω ; 4 V: 10 M Ω ; 40 V to 1000 V: 9.1 M Ω	
Overload Protection	1000 V DC or 750 V AC RMS	
Current		
DC Current		
Ranges	200 μ A, 2000 μ A, 20 mA, 200 mA 2 A	$\pm$ (1.0 % rdg + 2 dgt) $\pm$ (2.0 % rdg + 3 dgts)
AC Current (45 Hz to 500 Hz)		
Ranges	200 μ A, 2000 μ A, 20 mA, 200 mA 2 A	$\pm$ (1.5 % rdg + 5 dgts) $\pm$ (2.5 % rdg + 5 dgts)
Resolution	0.1 μ A	
Input Protection	2 A/1000 V fast blow ceramic fuse 6.3 mm x 32 mm on A input	
Burden Voltage	500 mV max. (2 V max. on 2 mA, 200 mA ranges)	
Resistance	200 Ω , 2 k Ω , 20 k Ω , 200 k Ω , 2 M Ω 2000 M Ω	$\pm$ (1.0 % rdg + 4 dgts) $\pm$ {5.0 % (rdg -10 dgts) +20 dgt}
Resolution	100 m Ω	
Open Circuit Voltage	-0.45 V DC typical, (-1.2 V DC on 200 Ω range)	
Overload Protection	1000 V DC or 750 V AC RMS	
Continuity		
Audible Indication	Less than 25 Ω	
Response Time	100 ms	
Overload Protection	1000 V DC or 750 V AC RMS	



15XP-B Digital Multimeter

Data Sheet

Specifications, cont.

Function	Range	Accuracy
Diode Test		
Test Current	1.2 mA (approximate)	$\pm(1.5 \% \text{ rdg} + 3 \text{ dgts})$
Resolution	1 mV	
Open Circuit Voltage	3.0 dc typical	
Overload Protection	1000 V DC or 750 V AC RMS	
Logic Test		
	TTL	
Thresholds Logic 1 (Hi)	2.8 V $\pm$ 0.8 V	
Thresholds Logic 0 (Lo)	0.8 V $\pm$ 0.5 V	
Test Voltage	TTL 5 VDC	
Frequency Range	20 MHz	
Pulse Width	25 ns min	
Duty Cycle Limits	> 30 % and < 70 %	
Indication	40 ms beep at Logic 0 (Lo)	
Overload Protection	1000 VDC or 750 VAC RMS	
Non-Contact Voltage Indicator		
Sense voltage 70 V to 600 V ac (50 Hz to 60 Hz) beeper chirps and big bright red LED comes on, works on all ranges		

15XP-B Digital Multimeter

Data Sheet



Included Accessories

Pair of test leads (TL245A), fuse 2 A/ 1000 V (P/N FP200), 9 V battery (installed), Magne-Grip™ Holster with magnetic hanging strap and users manual.

Optional Accessories

VC30A Carrying Case
DL243D Test Lead Kit

Amprobe® Test Tools

website: www.Amprobe.com
email: info@amprobe.com
Everett, WA 98203
Tel: 877-AMPROBE

Amprobe® Test Tools Europe

In den Engematten 14
79286 Glottertal, Germany
Tel.: +49 (0) 7684 8009 - 0

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com