

max. 67 m³/h

DC axial fans

Series 620 60 x 60 x 25 mm





Highlights:

- Very rigid compression curve for high air flow at high back pressure.
- Motor with very low structure-borne noise.
- Innovative impeller with winglets for low noise.
- Control inputs, alarm and speed signals available on request.

General characteristics:

- Material: fibreglass-reinforced plastic. Impeller PA, housing PBT.
- Fully integrated electronic commutation.
- Protected against reverse polarity and locking.
- Connection via single strands AWG 22, TR 64. Bared and tin-plated.
- Air exhaust over struts. Direction of rotation clockwise, seen on rotor.
- Mass: 85 g.

Nominal data		Air flow		Nominal voltage	Voltage range	Sound pressure level	Sound power level	Sinter sleeve bearings	Ball bearings	Power input	Nominal speed	Temperature range	Service life L ₁₀ (40 °C)	Service life L ₁₀ (40 °C)	Life expectancy L ₁₀ Δ (40 °C) see P. 15	Curve	Specials
Type		m ³ /h	CFM	VDC	VDC	dB(A)	Bel(A)	■ / ■		Watts	RPM	°C	Hours	Hours	Hours	P. 110	
622 L		21	12,4	12	8...15	20	3,7	■		0,5	3 200	-20...+85	80 000 / 20 000		160 000	1	
622 M		30	17,7	12	8...15	29	4,3	■		1,0	4 550	-20...+75	77 500 / 30 000		150 000	2	
622 N		40	23,5	12	8...15	35	4,7	■		1,9	6 100	-20...+70	72 500 / 35 000		140 000	3	/2
622 H		46	27,1	12	8...15	39	5,1	■		2,3	6 850	-20...+70	70 000 / 35 000		140 000	4	
622 HH		56	33,0	12	8...15	43	5,6	■		3,5	8 200	-20...+70	65 000 / 32 500		130 000	5	
NEW 622 /2H3P		67	39,4	12	8...13,2	48	5,9	■		6,3	9 700	-20...+60	52 500 / 32 500		105 000	6	
624 L		21	12,4	24	18...28	20	3,7	■		1,0	3 200	-20...+70	80 000 / 40 000		160 000	1	
624 M		30	17,7	24	12...28	29	4,3	■		1,5	4 550	-20...+70	77 500 / 37 500		150 000	2	
624 N		40	23,5	24	12...28	35	4,7	■		2,2	6 100	-20...+70	72 500 / 35 000		140 000	3	
624 H		46	27,1	24	18...28	39	5,1	■		2,4	6 850	-20...+70	70 000 / 35 000		140 000	4	
624 HH		56	33,0	24	18...28	43	5,6	■		3,6	8 200	-20...+70	65 000 / 32 500		130 000	5	/2
NEW 624 /2H3P		67	39,4	24	18...28	48	5,9	■		5,8	9 700	-20...+60	52 500 / 32 500		105 000	6	
628 HH		56	33,0	48	36...56	43	5,6	■		4,2	8 200	-20...+70	65 000 / 32 500		130 000	5	/2

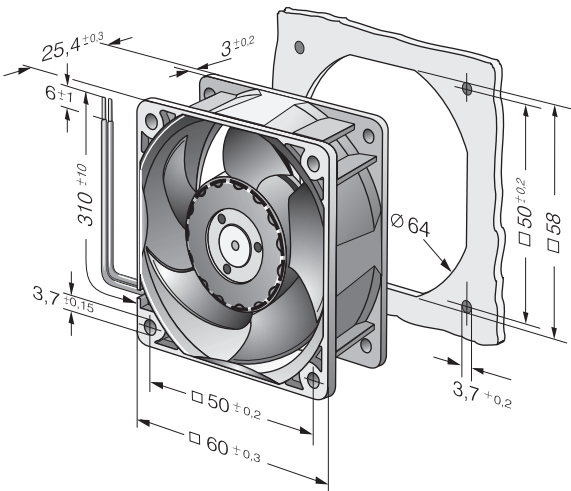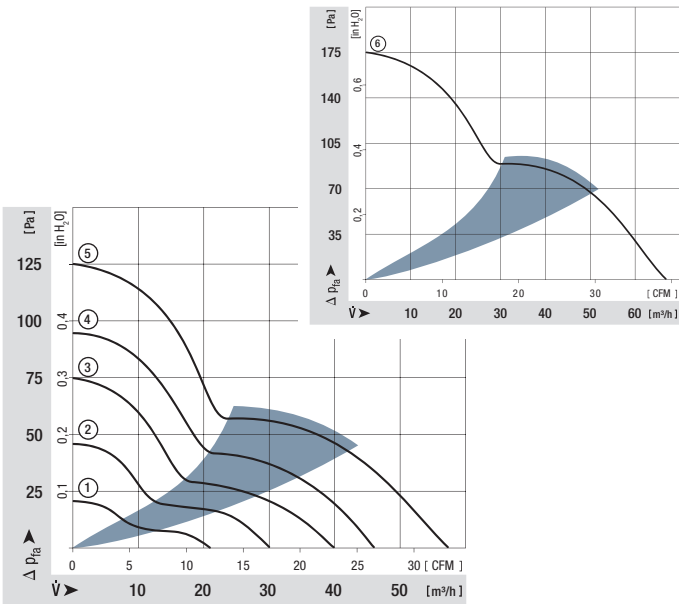

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com